



2023

JIANGSU YUNYI ELECTRIC CO.,LTD





COMPANY PROFILE



Jiangsu Yunyi Electric Co., Ltd is one of the most competitive China-head-quartered enterprises in automobile electric appliance sector. For many years, it has been devoted to research, design, produce and supply such products as automotive rectifier, regulator, diode, plastic parts and motor controller. The company is located at Tongshan New Area, Xuzhou China and takes up a covering area of 65000 square meters and a floor area of 45000 square meters.

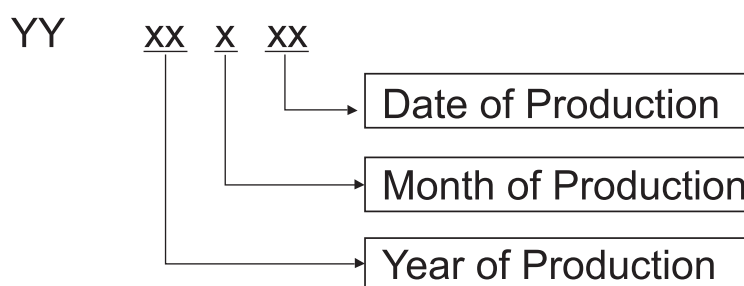
Yunyi has got involved in new car markets and after-sale repair services both at home and abroad. The company insists the brief of 'regard technology as core' . It has established a perfect quality management and control system by following the guides of 'zero defect' , 'delicacy management' and 'lean production' . And it has qualified by TS16949 since 2006 and ISO14000 since 2009.

Yunyi has been committed to the guiding ideology of 'customers are the first: always listening, understanding and satisfying your demands' and has been trying to be a worldwide best supplier of automotive electronics products.

PRODUCT CODE PRINCIPLE

X XX XXX Product types Product series Serial number						
Product types						
REGULATOR (3) RECTIFIER (2)	00	10	20	30	40	50
	LUCAS	DELCO	FORD	NIPPONDENSO	BOSCH	HITACHI
	60	70	80	90		
	MITSUBISHI	MEGNETI MARELLI	VALEO	PRESTOLITE		

DATE CODE: FOR TRACING THE QUALITY RECORDS



提示:所有涉及到的厂家的名称、型号及图片,仅做参考,规格请以实物为准!

Tip: All the manufacturers names, product numbers and pictures referred are used for reference only.

REGULATOR

00 Series.....	P01
01 Series.....	P02-12
02 Series.....	P13-14
03 Series.....	P15-32
04 Series.....	P33-54
05 Series.....	P55-64
06 Series.....	P65-84
07 Series.....	P85-88
08 Series.....	P89-110
10/11/12/14 Series.....	P111-114

RECTIFIER

LUS/LA Series.....	P115-118
DC Series.....	P119-130
FD Series.....	P131-134
NPD Series.....	P135-148
BHP/ISK Series.....	P149-188
HI Series.....	P189-206
MIA/MIP Series.....	P207-234
MG Series.....	P235-240
VAL Series.....	P241-286
MOP/ZLB Series.....	P287-290

DIODE

DIODES Series.....	P291-300
--------------------	----------

PLASTIC PARTS

PLASTIC Series	P300-316
----------------------	----------

catalog # page

300-010/00-001.....1	313-110/01-053.....6	320-050/02-014.....13
300-020/00-003.....1	313-120/01-062.....6	321-010/02-005.....13
301-010/00-002.....1	313-130/01-066.....6	321-020/02-006.....13
302-010/00-005.....1	314-010/01-049.....7	321-030/02-018.....13
310-010/01-001.....2	314-020/01-050.....7	323-020/02-013.....13
310-030/01-004.....2	314-030/01-051.....7	322-010/02-003.....14
310-050/01-007.....2	314-040/01-071.....7	322-020/02-004.....14
310-060/01-008.....2	314-050.....7	322-040/02-007.....14
310-070/01-013.....2	314-060.....7	322-060/02-011.....14
310-080/01-014.....2	315-010/01-063.....7	322-080/02-016.....14
310-110/01-031.....2	315-020/01-065.....7	322-090/02-017.....14
310-120/01-033.....2	315-050.....7	323-010/02-012.....14
310-200/01-064.....2	315-080.....8	330-010/03-014.....15
310-310.....3	315-090.....8	330-020/03-031.....15
310-321.....3	316-010/01-055.....8	330-030/03-042.....15
310-331.....3	316-030/01-061.....8	330-040/03-062.....15
310-401.....3	317-010.....8	330-050/03-064.....15
311-010/01-005.....3	318-010.....8	330-060/03-065.....15
311-020/01-016.....3	318-020.....8	330-070/03-069.....15
311-030/01-025.....3	318-030.....8	330-080/03-073.....15
313-FZ0.....3	318-040.....8	330-090/03-074.....15
311-050/01-037.....3	318-050.....9	330-110/03-088.....16
311-060/01-039.....4	318-060.....9	330-120/03-089.....16
311-070/01-054.....4	318-070.....9	330-130/03-090.....16
311-100/01-069.....4	31Y-930.....9	330-140/03-091.....16
311-360.....4	31Y-940.....9	330-150/03-092.....16
311-370.....4	31Y-950.....9	330-160.....16
311-390.....4	38Y-120.....9	330-330.....16
312-010/01-010.....4	313-CV0.....9	330-340.....16
312-040/01-026.....4	313-D20.....9	330-341.....16
312-050/01-027.....4	313-D70.....10	330-342.....17
312-060/01-030.....5	313-DW0.....10	330-400.....17
312-070/01-032.....5	313-DX0.....10	330-460.....17
312-080/01-046.....5	313-E80.....10	330-540.....17
312-090/01-047.....5	313-ET0.....10	330-570.....17
312-170.....5	310-380.....10	330-600.....17
312-180.....5	310-430.....10	330-680.....17
312-200.....5	310-480.....10	330-740.....17
313-010/01-018.....5	311-440.....10	330-780.....17
313-020/01-019.....5	314-070.....11	330-820.....18
313-030/01-020.....6	313-FX0.....11	336-081.....18
313-050/01-021.....6	320-010/02-001.....13	336-550.....18
313-060/01-023.....6	320-020/02-008.....13	331-040/03-099.....18
313-070/01-038.....6	320-030/02-009.....13	331-060.....18
313-090/01-048.....6	320-040/02-010.....13	331-070.....18
313-100/01-052.....6		

catalog # page

331-170/03-084.....	18	332-660/03-102.....	23	336-490.....	29
331-180/03-085.....	18	333-210.....	23	337-010.....	29
332-010/03-001.....	18	333-270.....	24	332-C10/03-040.....	29
332-020/03-004.....	19	334-030/03-015.....	24	332-C20/03-058.....	29
332-030/03-005.....	19	334-040/03-029.....	24	332-CQ0.....	29
332-040/03-007.....	19	334-050/03-060.....	24	332-DH0.....	29
332-050/03-008.....	19	335-010/03-009.....	24	332-DK0.....	29
332-070/03-011.....	19	335-030/03-023.....	24	332-DM0.....	29
332-080/03-012.....	19	335-040/03-024.....	24	332-DP0.....	29
332-090/03-013.....	19	335-060/03-053.....	24	332-DT0.....	30
332-100/03-016.....	19	335-080/03-061.....	24	332-DZ0.....	30
332-110/03-017.....	19	335-100/03-0091.....	25	332-E40.....	30
332-120/03-018.....	20	335-130.....	25	332-E50.....	30
332-130/03-019.....	20	335-170.....	25	332-E60.....	30
332-150/03-021.....	20	335-190.....	25	332-E70.....	30
332-160/03-025.....	20	336-010.....	25	332-E90.....	30
332-180/03-027.....	20	336-020.....	25	332-EA0.....	30
332-190/03-028.....	20	336-030.....	25	332-EJ0.....	30
332-200/03-030.....	20	336-040.....	25	332-EP0.....	31
332-210/03-032.....	20	336-050.....	25	332-ES0.....	31
332-220/03-033.....	20	336-060.....	26	332-F20.....	31
332-240/03-035.....	21	336-070.....	26	332-F70.....	31
332-250/03-036.....	21	336-080.....	26	332-F90.....	31
332-270/03-038.....	21	336-090.....	26	330-810.....	31
332-280/03-039.....	21	336-100.....	26	330-170.....	31
332-290/03-041.....	21	336-110.....	26	336-640.....	31
332-310/03-044.....	21	336-120.....	26	340-010/04-001.....	33
332-320/03-045.....	21	336-130.....	26	340-020/04-002.....	33
332-330/03-046.....	21	336-150.....	26	340-050/04-006.....	33
332-350/03-048.....	21	336-160.....	27	340-070/04-008.....	33
332-360/03-051.....	22	336-170.....	27	340-090/04-010.....	33
332-370/03-052.....	22	336-190.....	27	340-140/04-031.....	33
332-400/03-056.....	22	336-200.....	27	340-150/04-032.....	33
332-410/03-059.....	22	336-210.....	27	340-230/04-054.....	33
332-420/03-066.....	22	336-220.....	27	340-240/04-055.....	33
332-430/03-068.....	22	336-230.....	27	340-250/04-056.....	34
332-490/03-077.....	22	336-240.....	27	340-260/04-057.....	34
332-510/03-079.....	22	336-250.....	27	340-270/04-058.....	34
332-520/03-080.....	22	336-260.....	28	340-280/04-063.....	34
332-530/03-081.....	23	336-270.....	28	340-320/04-067.....	34
332-540/03-082.....	23	336-290.....	28	340-360/04-80.....	34
332-550/03-083.....	23	336-300.....	28	340-380/04-084.....	34
332-590/03-094.....	23	336-310.....	28	340-420/04-096.....	34
332-620/03-096.....	23	336-350.....	28	340-440/04-109.....	34
332-640/03-100.....	23	336-430.....	28	340-450/04-130.....	35
332-650/03-101.....	23	336-440.....	28	340-480/04-152.....	35
		336-460.....	28	341-060/04-034.....	35
				341-090/04-061.....	35

catalog # page

341-100/04-062.....	35	342-280/04-116.....	40	344-540.....	45
341-110/04-072.....	35	342-281.....	40	344-541.....	45
341-130/04-083.....	35	342-282.....	40	344-542.....	45
341-140/04-0851.....	35	342-290/04-125.....	40	344-543.....	46
341-160/04-087.....	35	342-300/04-126.....	41	344-544.....	46
341-170/04-088.....	36	342-320/04-129.....	41	344-545.....	46
341-180/04-095.....	36	342-330/04-133.....	41	344-546.....	46
341-200/04-099.....	36	342-340/04-134.....	41	344-547.....	46
341-220/04-103.....	36	342-350/04-141.....	41	344-570.....	46
341-230/04-110.....	36	342-360/04-147.....	41	344-600.....	46
341-240/04-112.....	36	342-361.....	41	344-670.....	46
341-260/04-124.....	36	342-362.....	41	344-870.....	46
341-280/04-136.....	36	342-363.....	41	344-871.....	47
341-310/04-148.....	36	342-370/04-150.....	42	345-010/04-078.....	47
341-320/04-149.....	37	342-400/04-162.....	42	345-020/04-089.....	47
341-330/04-154.....	37	341-AB0.....	42	345-030/04-118.....	47
341-340/04-157.....	37	342-560.....	42	345-040/04-119.....	47
341-350/04-158.....	37	342-580/04-164.....	42	345-050/04-121.....	47
341-360/10-001.....	37	342-590/04-165.....	42	345-060/04-122.....	47
341-370/10-003.....	37	342-700.....	42	344-AZ1.....	47
341-720/04-092.....	37	342-701.....	42	344-B00.....	47
341-750.....	37	342-730/04-0261.....	42	345-090/04-156.....	48
341-760.....	37	342-940.....	43	345-091.....	48
342-012.....	38	342-950.....	43	345-100.....	48
342-030/04-014.....	38	342-GA0.....	43	345-110.....	48
344-BU0.....	38	342-990.....	43	341-321.....	48
342-050/04-020.....	38	343-020/04-140.....	43	345-180/04-145.....	48
344-C50.....	38	343-021.....	43	345-182.....	48
342-070/04-0221.....	38	343-022.....	43	345-183.....	48
342-080/04-024.....	38	343-023.....	43	345-190/04-144.....	48
342-090/04-026.....	38	343-030/04-143.....	43	345-191.....	49
342-100/04-028.....	39	343-032.....	44	345-201.....	49
342-110/04-035.....	39	343-033.....	44	345-202.....	49
342-120/04-042.....	39	343-040/04-146.....	44	345-210.....	49
342-140/04-045.....	39	343-050.....	44	345-220.....	49
342-160/04-053.....	39	343-060.....	44	345-221.....	49
342-180/04-069.....	39	344-020/04-113.....	44	345-260.....	49
342-190/04-071.....	39	344-030/04-114.....	44	345-270.....	49
342-200/04-082.....	39	344-040/04-117.....	44	344-BL0.....	49
342-210/04-086.....	39	344-050/04-128.....	44	346-010/04-025.....	50
342-230/04-104.....	39	344-060/04-131.....	45	346-020/04-027.....	50
342-240/04-106.....	40	344-070/04-142.....	45	346-030/04-043.....	50
342-250/04-107.....	40	344-080/04-155.....	45	348-020.....	50
342-252.....	40	344-090/04-160.....	45	348-030.....	50
342-253.....	40	344-100/04-161.....	45	348-040.....	50
342-270/04-115.....	40	344-500.....	45	340-BD0.....	50

catalog # page

340-CLO.....	50	350-160/05-047.....	56	352-610.....	61
340-D30.....	50	350-170/05-053.....	56	352-710.....	61
341-A50.....	51	350-180/05-054.....	56	353-010/05-017.....	61
341-A60.....	51	350-190/05-055.....	57	353-020/05-027.....	62
341-A90.....	51	350-200/05-059.....	57	353-140/05-060.....	62
341-A91.....	51	350-210/05-065.....	57	353-180.....	62
341-A93.....	51	350-230/05-083.....	57	354-010/04-097.....	62
341-AA0.....	51	350-250/05-089.....	57	354-720/04-085.....	62
341-AE0.....	51	350-270/05-091.....	57	356-010.....	62
341-AF0.....	51	350-290/05-095.....	57	356-020.....	62
341-AG0.....	51	350-300/05-096.....	57	356-030.....	62
342-A60.....	52	350-310/05-099.....	57	356-050.....	62
342-AC0.....	52	350-320/05-100.....	58	356-060.....	63
342-AD0.....	52	350-330/05-103.....	58	356-070.....	63
342-AH0.....	52	350-370/05-107.....	58	356-080.....	63
342-AQ0.....	52	350-390/05-109.....	58	356-090.....	63
342-AR0.....	52	350-400/05-111.....	58	356-100.....	63
342-AZ0.....	52	350-410/05-112.....	58	356-110.....	63
342-BV0.....	52	350-420/05-113.....	58	356-130.....	63
342-CQ0.....	52	350-650/05-024.....	58	350-A30.....	63
342-DX1.....	53	350-660/05-003.....	58	350-A40.....	63
344-AA0.....	53	350-670/05-002.....	59	350-B30.....	64
344-AM0.....	53	350-900.....	59	350-BC0.....	64
344-AN0.....	53	350-910.....	59	350-BD0.....	64
344-AU0.....	53	350-940.....	59	350-EM0.....	64
344-AU1.....	53	350-970.....	59	350-F00.....	64
344-AU0.....	53	351-010/05-052.....	59	350-FA0.....	64
344-AZ0.....	53	351-020/05-088.....	59	334-060/06-039.....	65
341-AN0.....	53	351-030/05-097.....	59	360-010/06-001.....	65
341-AP0.....	54	350-FB0.....	59	360-020/06-002.....	65
343-034.....	54	351-060/05-110.....	60	360-030/06-004.....	65
350-010/05-001.....	55	351-670.....	60	360-050/06-006.....	65
350-020/05-004.....	55	352-010/05-005.....	60	360-070/06-008.....	65
350-030/05-008.....	55	352-030/05-007.....	60	360-100/06-013.....	65
350-040/05-009.....	55	352-040/05-010.....	60	360-101.....	65
350-050/05-014.....	55	352-050/05-011.....	60	360-110/06-014.....	65
350-060/05-015.....	55	352-052.....	60	360-130/06-016.....	66
350-070/05-016.....	55	352-060/05-012.....	60	360-150/06-028.....	66
350-080/05-018.....	55	352-070/05-013.....	60	360-160/06-029.....	66
350-090/05-025.....	55	352-100/05-028.....	61	360-170/06-030.....	66
350-100/05-035.....	56	352-110/05-030.....	61	360-180/06-031.....	66
350-110/05-036.....	56	352-150/05-034.....	61	360-190/06-032.....	66
350-120/05-037.....	56	352-210/05-046.....	61	360-200/06-034.....	66
350-130/05-041.....	56	352-260/05-063.....	61	360-210/06-035.....	66
350-140/05-042.....	56	352-330/05-076.....	61	360-220/06-036.....	66
350-150/05-043.....	56				

catalog # page

360-230/06-037.....	67	360-790/06-120.....	72	362-400.....	77
360-240/06-041.....	67	360-800/06-121B0.....	72	364-010/06-068.....	77
360-250/06-043.....	67	360-801.....	72	364-020/06-069.....	77
360-270/06-046.....	67	360-810/06-123.....	72	364-030/06-070.....	77
360-280/06-050.....	67	360-850/06-131.....	72	364-040/06-079.....	77
360-290/06-051.....	67	360-861.....	72	365-010/06-095.....	77
360-300/06-053.....	67	360-870/06-134.....	72	365-020/06-107.....	77
360-301/06-0531.....	67	360-920/06-139.....	72	365-030/06-113.....	78
360-320/06-056.....	67	360-930/06-140.....	73	366-010/06-019.....	78
360-340/06-059.....	68	361-010/06-003.....	73	366-020/06-026.....	78
360-350/06-060.....	68	361-030/06-009.....	73	366-030/06-052.....	78
360-390/06-065.....	68	361-050/06-011.....	73	366-040/06-055.....	78
360-400/06-066.....	68	361-070/06-018.....	73	366-060.....	78
360-410/06-067.....	68	361-090/06-020.....	73	366-070.....	78
360-420/06-072.....	68	361-130/06-027.....	73	366-080.....	78
360-430/06-073.....	68	361-150/06-044.....	73	367-010.....	78
360-440/06-074.....	68	361-170/06-049.....	73	367-020.....	79
360-450/06-075.....	68	361-190/06-064.....	74	367-030.....	79
360-480/06-078.....	69	361-210.....	74	367-040.....	79
360-490/06-080.....	69	361-220.....	74	367-050.....	79
360-500/06-081.....	69	361-230.....	74	367-060.....	79
360-510/06-082.....	69	362-010/06-100.....	74	367-070.....	79
360-520/06-084.....	69	362-020/06-101.....	74	367-080.....	79
360-530/06-085.....	69	362-030/06-111.....	74	367-090.....	79
360-540/06-086.....	69	362-040/06-112.....	74	367-100.....	79
360-550/06-087.....	69	362-050/06-122.....	74	367-110.....	80
360-560/06-088.....	69	362-060/06-124.....	75	367-120.....	80
360-580/06-090.....	70	362-070/06-125.....	75	367-130.....	80
360-590/06-092.....	70	362-140.....	75	367-140.....	80
360-600/06-093.....	70	362-150.....	75	367-150.....	80
360-620/06-096.....	70	362-160.....	75	368-010.....	80
360-630/06-097.....	70	362-170.....	75	368-020.....	80
360-640/06-098.....	70	362-190.....	75	360-C20.....	80
360-650/06-102.....	70	362-200.....	75	360-FLO.....	80
360-660/06-103.....	70	362-210.....	75	360-D10.....	81
360-680/06-105.....	70	362-260.....	76	360-D80.....	81
360-690/06-106.....	71	362-280.....	76	360-DH0.....	81
360-700/06-108.....	71	362-290.....	76	360-DN0.....	81
360-710/06-109.....	71	362-300.....	76	360-DP0.....	81
360-720/06-110.....	71	362-320.....	76	360-DR0.....	81
360-730/06-114.....	71	362-330.....	76	360-DS0.....	81
360-740/06-115.....	71	362-340.....	76	360-DT0.....	81
360-750/06-116.....	71	362-350.....	76	360-DW0.....	81
360-760/06-117.....	71	362-360.....	76	360-DY0.....	82
360-770/06-118.....	71	362-370.....	77	360-E10.....	82
360-780/06-119.....	72	362-380.....	77	360-E50.....	82

catalog # page

360-ED0.....	82	380-060/08-008.....	89	380-360/08-057.....	94
360-EG0.....	82	380-070/08-009.....	89	380-370/08-058.....	94
360-EJ0.....	82	380-080/08-010.....	89	380-371.....	94
360-EM0.....	82	380-090/08-012.....	89	380-372.....	94
360-EN0.....	82	380-100/08-016.....	89	380-373.....	95
360-EQ0.....	82	380-110/08-018.....	90	380-375.....	95
360-ER0.....	83	380-120/08-019.....	90	380-376.....	95
360-ES0.....	83	380-130/08-020.....	90	380-377.....	95
360-ET0.....	83	380-131.....	90	380-378.....	95
360-EZ0.....	83	380-132.....	90	380-379.....	95
360-F40.....	83	380-133/08-073.....	90	380-390/08-060.....	95
360-F70.....	83	380-134.....	90	380-400/08-061.....	95
360-F80.....	83	380-135.....	90	380-420/08-063.....	95
360-FA0.....	83	380-136.....	90	380-430/08-064.....	96
360-FC0.....	83	380-137.....	91	380-440/08-065.....	96
360-FEO.....	84	380-138.....	91	380-441.....	96
360-FF0.....	84	380-139.....	91	380-442.....	96
360-FH0.....	84	380-140/08-024.....	91	380-443.....	96
360-FJ0.....	84	380-150/08-031.....	91	380-444.....	96
360-FK0.....	84	380-160/08-032.....	91	380-445.....	96
360-FG0.....	84	380-170/08-033.....	91	380-450/08-066.....	96
360-CF1.....	84	380-180/08-035.....	91	380-460/08-067.....	96
367-170.....	84	380-200/08-039.....	91	380-480/08-069.....	97
370-010/07-001.....	85	380-210/08-040.....	92	380-490/08-070.....	97
370-030/07-005.....	85	380-230/08-043.....	92	380-530/08-074.....	97
370-040/07-015.....	85	380-241.....	92	380-531.....	97
371-010/07-006.....	85	380-242.....	92	380-532.....	97
371-080/07-014.....	85	380-243.....	92	380-533.....	97
371-100/07-017.....	85	380-244.....	92	380-534.....	97
371-130/07-019.....	85	380-245.....	92	380-535.....	97
371-140/07-020.....	85	380-270/08-048.....	92	380-536.....	97
371-190/07-027.....	85	380-280/08-049.....	92	380-537.....	98
371-220/07-032.....	86	380-281.....	93	380-538.....	98
371-240/07-034.....	86	380-282.....	93	380-539.....	98
371-270/07-37.....	86	380-283.....	93	380-541.....	98
371-430.....	86	380-284.....	93	380-542.....	98
371-440.....	86	380-285.....	93	380-543.....	98
371-450.....	86	380-286.....	93	380-544.....	98
371-480.....	86	380-287.....	93	380-545.....	98
372-030/07-021.....	86	380-288.....	93	380-546.....	98
372-040/07-022.....	86	380-290/08-050.....	93	380-547.....	99
372-050/07-024.....	87	380-300/08-051.....	94	380-548.....	99
372-120.....	87	380-310/08-052.....	94	380-549.....	99
380-010/08-001.....	89	380-320/08-053.....	94	380-550/08-076.....	99
380-030/08-004.....	89	380-330/08-054.....	94	380-551.....	99
380-040/08-006.....	89	380-340/08-055.....	94	380-553.....	99
380-050/08-007.....	89				

catalog # page

380-560/08-077.....	99	380-CU0.....	104	380-53T.....	109
380-610/08-082.....	99	380-CV0.....	104	381-060.....	109
380-640/08-085.....	99	380-D70.....	105	380-53K.....	110
380-651.....	100	380-D80.....	105	380-C90.....	110
380-660/08-087.....	100	380-D90.....	105	393-040.....	111
381-010/08-023.....	100	380-DD0.....	105	390-690.....	111
381-030/08-045.....	100	380-DF0.....	105	353-030/12-001.....	111
382-040/08-014.....	100	380-DK0.....	105	353-040/12-003.....	111
382-050/08-015.....	100	380-L10/08-075.....	105	353-080/12-010.....	111
382-070/08-021.....	100	380-L20.....	105	353-090/12-011.....	111
382-080/08-028.....	100	380-L60.....	105	353-100/12-012.....	111
382-110.....	100	380-L80.....	106	353-110/12-015.....	111
382-120.....	101	380-LB0.....	106	353-140.....	111
383-010/08-022.....	101	380-LC0.....	106	354-050/12-007.....	112
383-030/08-026.....	101	380-LD0.....	106	354-080/12-016.....	112
383-040/08-027.....	101	380-13A.....	106	200-020/LUS133.....	115
383-050/08-034.....	101	380-13B.....	106	200-050/LUS136.....	115
383-060/08-036.....	101	380-13C.....	106	200-060/LUS137.....	115
383-070/08-038.....	101	380-130.....	106	200-090/LUS140.....	115
380-AU0.....	101	380-13E.....	106	200-100/LUS143.....	115
380-B20.....	101	380-13F.....	107	200-110/LUS145.....	115
380-B30.....	102	380-13G.....	107	200-120/LUS147.....	115
380-B31.....	102	380-13J.....	107	200-130/LUS148.....	115
380-B40.....	102	380-13K.....	107	200-140/LUS149.....	115
380-B50.....	102	380-37A.....	107	200-150/LUS152.....	116
380-B70.....	102	380-37B.....	107	200-230.....	116
380-B80.....	102	380-37C.....	107	201-010/LUS1101.....	116
380-B90.....	102	380-37D.....	107	203-020/LA1102.....	117
380-BA0.....	102	380-37E.....	107	203-030/LA1103.....	117
380-BE0.....	102	380-53A.....	108	203-080/LA1107-1.....	117
380-BF0.....	103	380-53B.....	108	203-210/LA1128B.....	117
380-BG0.....	103	380-53C.....	108	203-230/LA1130.....	117
380-BJ0.....	103	380-53D.....	108	203-310/LA1139.....	117
380-BK0.....	103	380-53E.....	108	203-620.....	117
380-BK1.....	103	380-53F.....	108	204-010/LA1114.....	117
380-BK2.....	103	380-53G.....	108	204-020/LA1115.....	117
380-BL0.....	103	380-53H.....	108	210-140/DC5263D.....	119
380-BV0.....	103	380-53J.....	108	210-150/DC5300.....	119
380-C10.....	103	380-53L.....	109	210-260/DC5304.....	119
380-C20.....	104	380-53M.....	109	210-302/DCE5173.....	119
380-C40.....	104	380-53N.....	109	210-390/DCE5177.....	119
380-C60.....	104	380-53P.....	109	210-530/DC5302D-1.....	119
380-CA0.....	104	380-53Q.....	109	210-560/DC5302-1.....	119
380-CK0.....	104	380-54A.....	109		
380-CQ0.....	104	380-54B.....	109		
380-CS0.....	104				

catalog # page

211-010/DC6100.....	119	214-131.....	124	217-060.....	129
211-020/DC6102.....	119	214-140/DC1122A.....	124	217-061.....	129
211-030/DC6103.....	120	214-150/DC4100.....	124	215-03B.....	129
211-033/DC6103HD.....	120	214-160/DC4108.....	125	215-03C.....	130
211-050/DC6104.....	120	214-200/DC9410.....	125	215-75A.....	130
211-052/DC6104B.....	120	214-210/DC9411.....	125	215-75B.....	130
211-070/DC6106.....	120	214-530.....	125	217-031.....	130
212-010/DC5070.....	120	214-720.....	125	217-041.....	130
212-030/DC5072.....	120	214-760.....	125	215-870.....	130
212-040/DC5075.....	120	214-790.....	125	215-880.....	130
212-050/DC5085.....	120	215-020/DC1124A.....	125	220-010/FD3001DW.....	131
212-060/DC5170.....	121	215-030/DC1124AH.....	125	220-020/FD3002DW.....	131
212-061/DC5172.....	121	215-035.....	126	221-070/FD4001DW.....	131
212-070/DC5180.....	121	215-037.....	126	222-020/FD6000DW(Y).....	131
212-090/DC5181.....	121	215-040/DC6109A.....	126	222-040/FD6001DW(Y).....	131
212-091/DC5181B.....	121	215-045.....	126	222-070/FD6002DW(Y).....	131
212-120/DC5182.....	121	215-048.....	126	222-100/FD6011DW(△).....	131
212-130/DC5183.....	121	215-049.....	126	222-120/FD6012DW(△).....	131
212-150/DC5184.....	121	215-051/DC6109AH.....	126	223-010/FD61001A.....	131
212-151/DC5184-1.....	121	215-070/DC6111A.....	126	223-020/FD61002A.....	132
212-152/DC5184HD.....	122	215-090/DC6112A.....	126	223-030/FD61003A.....	132
212-170/DC5185.....	122	215-250.....	127	223-040/FD61004A.....	132
212-171/DC5185HD.....	122	215-340.....	127	223-080.....	132
212-180/DC5185-1.....	122	215-341.....	127	223-100.....	132
212-200/DC5186.....	122	215-351.....	127	224-010/FD1001.....	132
212-220/DC5187.....	122	215-500.....	127	224-020/FD1002.....	132
212-221/DC5188.....	122	217-051.....	127	224-040/FD1004.....	132
212-222/DC5188B.....	122	215-652.....	127	224-050/FD1005.....	132
212-230/DC5189.....	122	215-700.....	127	224-060/FD1007.....	133
212-240/DC5190.....	123	215-705.....	127	225-011/FD2001.....	133
212-241/DC5191.....	123	215-740.....	128	225-020/FD2004.....	133
212-250/DC5192.....	123	215-742.....	128	230-020/NPD11501A.....	135
212-251/DC5193.....	123	215-752.....	128	230-030/NPD11502A.....	135
212-280/DCE1003.....	123	215-753.....	128	230-060/NPD11701AL.....	135
212-281/DCE1004.....	123	215-758.....	128	230-070/NPD11702AL.....	135
213-022/DC5181AP.....	123	215-830.....	128	230-080/NPD11703AL.....	135
213-024/DC5181BP.....	123	215-850.....	128	230-082/NPD11729AL.....	135
213-030/DC5187.....	123	215-871.....	128	230-090/NPD11705AL.....	135
213-041/DC5281P.....	124	217-010.....	128	230-110/NPD11706AL.....	135
214-070.....	124	217-020.....	129	230-120/NPD11707A.....	135
214-080/DC1101.....	124	217-021.....	129	230-140/NPD11708.....	136
214-090/DC1102.....	124	217-030.....	129	230-150/NPD11708AL.....	136
214-100/DC1103.....	124	217-032.....	129	230-170/NPD11709AL.....	136
214-110/DC1105.....	124	217-040.....	129	230-176.....	136
		217-042.....	129	230-180/NPD11710AL.....	136
				230-220/NPD11712AL.....	136

catalog # page

230-270/NPD11717AL.....	136	231-350/NPD10308.....	141	230-ARO.....	146
230-290/NPD11720AL.....	136	231-360/NPD11310.....	141	230-AYO.....	146
230-330/NPD11731AL.....	136	231-410/NPD8301.....	141	230-B00.....	146
230-370/NPD11735AL.....	137	231-470/NPD8702.....	141	232-AP0.....	146
230-380/NPD11736AL.....	137	231-530/NPD9002.....	142	230-814.....	146
230-381.....	137	231-560/NPD8303G.....	142	240-010/BHP11201(Y).....	149
230-421.....	137	231-600.....	142	240-060/BHP11203(Y).....	149
230-422.....	137	231-610.....	142	240-070/BHP11204(Y).....	149
230-510.....	137	231-640.....	142	240-080/BHP11204(Y).....	149
230-620.....	137	231-660.....	142	240-080/BHP11204(Y).....	149
230-710.....	137	231-690.....	142	240-140/BHP11207(Y).....	149
230-731.....	137	232-510/NPD10001L.....	142	240-160/BHP11209(Y).....	149
230-790.....	138	232-530/NPD10002L.....	142	240-180/BHP11210B(Y).....	149
230-810.....	138	232-540/NPD10004L.....	143	240-190/BHP11211(Y).....	149
230-811.....	138	232-590/NPD10301L.....	143	240-210/BHP11213(Y).....	150
230-815.....	138	232-610/NPD10303L.....	143	240-220/BHP11214(Y).....	150
230-817.....	138	232-620/NPD10304L.....	143	240-230/BHP11215(Y).....	150
230-819.....	138	232-640/NPD10305L.....	143	240-270/BHP11219A(Y).....	150
230-840.....	138	232-670/NPD10306L.....	143	240-290/BHP12201(Y).....	150
230-850.....	138	232-700/NPD11302L.....	143	240-300/BHP12201-1(Y).....	150
230-870.....	138	232-710/NPD10303L.....	143	240-310/BHP12202(Y).....	150
230-881.....	139	232-720/NPD10305L.....	143	240-330/BHP12204(Y).....	150
230-882.....	139	232-730/NPD11306L.....	144	240-340/BHP12205(Y).....	150
230-960.....	139	232-740/NPD10308L.....	144	240-350/BHP12206(Y).....	151
231-011/NPD8701.....	139	232-760/NPD13801.....	144	240-360/BHP12207(△).....	151
231-060/NPD10001.....	139	233-030/NPD11401L.....	144	240-370/BHP12208(△).....	151
232-CC0.....	139	233-040/NPD11402.....	144	240-380/BHP12208-1(△).....	151
232-C90.....	139	233-060/NPD11404.....	144	240-390/BHP12209(△).....	151
231-100/NPD10004.....	139	233-090/NPD11406L.....	144	240-400/BHP12210(Y).....	151
231-110/NPD10005.....	139	233-100/NPD11406L-1.....	144	240-410/BHP12211B(Y).....	151
231-120/NPD10006.....	140	233-130/NPD11407L.....	144	240-430/BHP12212(Y).....	151
231-130/NPD10007.....	140	233-140/NPD11408.....	145	240-440/BHP12213B(Y).....	151
231-150/NPD10301.....	140	233-150/NPD11410.....	145	240-470/BHP12215(Y).....	152
231-160/NPD10302.....	140	233-160/NPD11411.....	145	240-480/BHP12216(Y).....	152
231-190/NPD10304.....	140	233-220/NPD11419.....	145	240-500/BHP12216(△).....	152
231-200/NPD10305.....	140	233-230.....	145	240-510/BHP12219(△).....	152
231-210/NPD10306.....	140	233-240.....	145	240-520/BHP12220(Y).....	152
231-240/NPD10322.....	140	234-010.....	145	240-540/BHP12226(△).....	152
231-250/NPD10323.....	140	234-020.....	145	240-550/BHP12228A(Y).....	152
231-270/NPD11301.....	141	234-030.....	146	240-720/ISK001.....	152
231-280/NPD11302.....	141	230-A40.....	146	240-740/ISK002.....	152
231-300/NPD10303.....	141	230-AJ0.....	146	240-750/ISK003.....	153
231-320/NPD10305.....	141	230-AL0.....	146	240-760/ISK004B.....	153
231-330/NPD11306.....	141				

catalog # page

240-770/ISK005.....	153	242-740/BHP121013.....	158	243-570/BHP12068B(△).....	163
240-790/ISK007.....	153	242-743.....	158	243-580/BHP12070(Y).....	163
240-800/ISK008.....	153	242-950/BHP12501.....	158	243-610/BHP12072(△).....	163
240-940(Y).....	153	242-970/BHP12503.....	158	243-620/BHP12073(△).....	163
242-010/BHP11401.....	153	242-980/BHP12504.....	158	243-640/BHP12074(△).....	163
242-020/BHP11402.....	153	242-992/BHP12505B.....	158	243-650/BHP12075(Y).....	164
242-040/BHP11403.....	153	243-031/BHP12057(△).....	159	243-660/BHP12076(△).....	164
242-060/BHP11404.....	154	243-040/BHP12017(Y).....	159	243-680/BHP12077(Y).....	164
242-080/BHP11406.....	154	243-060/BHP12019(Y).....	159	243-711/BHP12080HD(△).....	164
242-120/BHP11411.....	154	243-063(Y).....	159	243-713(△).....	164
242-130/BHP11412.....	154	243-080/BHP12020(Y).....	159	243-720/BHP12081A(△).....	164
242-150/BHP11413.....	154	243-090/BHP12021(Y).....	159	243-740/BHP12083HD(△).....	164
242-160/BHP11414.....	154	243-101/BHP12022HD(△).....	159	243-770/BHP12086(Y).....	164
242-170/BHP11415.....	154	243-110/BHP12023(△).....	159	243-840/BHP12094(△).....	164
242-180/BHP11416.....	154	243-130/BHP12025(△).....	159	243-850/BHP12095(Y).....	165
242-190/BHP11417.....	154	243-134(△).....	160	243-890/BHP12099(Y).....	165
242-200/BHP11418.....	155	243-140/BHP12025-1(△).....	160	243-900/BHP120100(Y).....	165
242-210/BHP11419.....	155	243-150/BHP12025-2(△).....	160	243-910/BHP120101B(△).....	165
242-220/BHP11420.....	155	243-170/BHP12026(△).....	160	243-931/BHP120104HD.....	165
242-230/BHP11421.....	155	243-172/BHP12026B(△).....	160	243-932.....	165
242-240/BHP11422.....	155	243-174/BHP12056(△).....	160	243-970/BHP120109(Y).....	165
242-250/BHP11424.....	155	243-200/BHP12030(△).....	160	244-050/BHP12801-006.....	165
242-260/BHP11425.....	155	243-210/BHP12031(Y).....	160	244-110/BHP12801AH.....	165
242-271/BHP11426A.....	155	243-220/BHP12032(△).....	160	244-115.....	166
242-281/BHP11426A-1.....	155	243-230/BHP12033(Y).....	161	244-116.....	166
242-351/BHP11427A.....	156	243-251/BHP12035HD(△).....	161	244-117.....	166
242-360/BHP11428A.....	156	243-260/BHP12036B(△).....	161	244-140/BHP12804-163.....	166
242-370/BHP11430A.....	156	243-270/BHP12037(△).....	161	244-148.....	166
242-380/BHP11431.....	156	243-280/BHP12038B(△).....	161	244-149.....	166
242-400/BHP11433A.....	156	243-290/BHP12039B(△).....	161	244-170/BHP12805-163.....	166
242-430/BHP11435.....	156	243-300/BHP12040(△).....	161	244-177.....	166
242-480/BHP11440.....	156	243-320/BHP12041(△).....	161	244-178.....	166
242-530/BHP11445A.....	156	243-330/BHP12042(△).....	161	244-179.....	167
242-540/BHP11446.....	156	243-340/BHP12043(Y).....	162	244-180/BHP12806-163.....	167
242-590/BHP11451A.....	157	243-351/BHP12044HD(△).....	162	244-190/BHP12807-163.....	167
242-620/BHP121001.....	157	243-371/BHP12046HD(△).....	162	244-191.....	167
242-630/BHP121002.....	157	243-420/BHP12051HD(△).....	162	244-220/BHP12811-197.....	167
242-650/BHP121004.....	157	243-430/BHP12052(Y).....	162	244-280/BHP12815A.....	167
242-660/BHP121005.....	157	243-440/BHP12053(△).....	162	244-330/BHP12820A(Y).....	167
242-670/BHP121006.....	157	243-452/BHP12054HD(△).....	162	244-420/BHP14508A1.....	167
242-680/BHP121007.....	157	243-460/BHP12055(Y).....	162	244-696.....	167
242-690/BHP121008.....	157	243-480/BHP12059(Y).....	162	244-723.....	168
242-700/BHP121009.....	157	243-500/BHP12062(Y).....	163	244-920/BHP12827AH(Y).....	168
242-710/BHP121010.....	158	243-510/BHP12063(Y).....	163	244-927.....	168
242-720/BHP121011.....	158	243-522/BHP12064HD(△).....	163	244-940/BHP12828A.....	168
242-730/BHP121012.....	158	243-531/BHP12065HD(△).....	163	244-951(Y).....	168

catalog # page

244-952 (Y).....	168	243-GK0.....	173	244-CN3.....	178
24Z-010.....	168	243-GLO.....	173	244-CP0.....	178
240-A20.....	168	243-GX0(△).....	173	244-CP1.....	179
242-A20/BHP12506.....	168	243-GY0(△).....	174	244-CQ0.....	179
242-A40/BHP12509.....	169	243-H10(△).....	174	244-CQ1.....	179
242-A70/BHP12510.....	169	243-H21(△).....	174	244-CR0.....	179
242-A80/BHP12511.....	169	243-HF0 (Y).....	174	244-CR1.....	179
242-AG0/BHP12517.....	169	243-HG0(△).....	174	244-CX1.....	179
242-AH0/BHP12519.....	169	243-HX2(△).....	174	244-CXC.....	179
242-AK0/BHP12522B.....	169	243-J60.....	174	244-CZ0.....	179
242-AL0/BHP14501.....	169	244-AC2 (Y).....	174	244-CZ1.....	179
242-AM0/BHP14502.....	169	244-AC6 (Y).....	175	244-D10.....	180
242-AY0/BHP14507.....	169	244-ACC(Y).....	175	244-D13.....	180
242-B20/BHP9001.....	170	244-AD1.....	175	244-DB0.....	180
242-B30/BHP9002.....	170	244-AH0.....	175	244-DC0.....	180
242-B40/BHP9003.....	170	244-AX0(Y).....	175	244-DC1.....	180
242-B50/BHP9005.....	170	244-B7F(△).....	175	244-DCD.....	180
242-B60/BHP9006.....	170	244-B70.....	175	244-DD0.....	180
242-D30.....	170	244-B75 (△).....	175	244-DF0.....	180
242-D70.....	170	244-BD0.....	175	244-DG2 (△).....	180
242-D80.....	170	244-BD1.....	176	244-DG3 (△).....	181
242-DE0.....	170	244-BD2.....	176	244-DH0.....	181
242-DW0.....	171	244-BD4.....	176	244-DH1.....	181
242-DX0.....	171	244-BD5.....	176	244-DK1.....	181
242-E30.....	171	244-BD6.....	176	244-DK2.....	181
242-E60.....	171	244-BD7.....	176	244-DK3.....	181
242-E90.....	171	244-BD8.....	176	244-DK4.....	181
242-EA0.....	171	244-BDG.....	176	244-DL0.....	181
242-EC0.....	171	244-BDK.....	176	244-DL1.....	181
243-A60/BHP120120B(△).....	171	244-BN0.....	177	244-DL2.....	182
243-AE0/BHP120133A(Y).....	171	244-BX1.....	177	244-DLK.....	182
243-AG0/BHP120135A.....	172	244-C71.....	177	244-DN1.....	182
243-AH0/BHP120136A(△).....	172	244-C91.....	177	244-DN6.....	182
243-AI0/BHP120137A(△).....	172	244-CE0.....	177	244-DS0.....	182
243-AN0/BHP120143A(△).....	172	244-CE1.....	177	244-DZ0.....	182
243-AS0/BHP12015(Y).....	172	244-CK0.....	177	244-E80.....	182
243-C60(△).....	172	244-CK1.....	177	244-E81 (△).....	182
243-CD0.....	172	244-CK4.....	177	244-E85 (△).....	182
243-DQ0.....	172	244-CK5.....	178	244-E86.....	183
243-DT1(△).....	172	244-CK8.....	178	244-EE0(△).....	183
243-DU0(△).....	173	244-CKA.....	178	244-EE1.....	183
243-E52(△).....	173	244-CKC.....	178	244-EU0.....	183
243-EB0(Y).....	173	244-CKF.....	178	244-F80(Y).....	183
243-FA0(Y).....	173	244-CM0.....	178	244-FC0(Y).....	183
243-G80(△).....	173	244-CNO.....	178	244-FC1(Y).....	183
243-GH0(△).....	173			244-FK0.....	183

catalog # page

244-FT0.....	183	150-220/HI11302BZT.....	189	250-180/HI11305A.....	195
244-FU0.....	184	150-240/HI11302AZT.....	189	250-190/HI11306.....	195
244-GM2.....	184	150-260/HI11303AZT-2.....	189	250-210/HI11308B.....	195
244-GZ1(△).....	184	150-280/HI11304AZT.....	189	250-270/HI11315A.....	195
240-9A0.....	184	150-300/HI11305AZT-1.....	190	250-290/HI11318A.....	195
240-9F0.....	184	150-320/HI11306ZT.....	190	250-360/HI11322A.....	195
240-9U0(Y).....	184	150-370/HI11308BZT.....	190	250-370/HI11323A.....	195
240-9V0.....	184	150-380/HI11308BZT-1.....	190	250-480/HI11304A.....	195
240-9W0(Y).....	184	150-390/HI11311BZT.....	190	250-530/HI11401.....	195
240-9X0(Y).....	184	150-420/HI11312ZT.....	190	250-540/HI11402.....	196
240-9Z0.....	185	150-450/HI11313AZT.....	190	250-560/HI11403.....	196
243-17A(△).....	185	150-470/HI11314AZT.....	190	250-610/HI11405.....	196
244-11A.....	185	150-480/HI11315A-1ZT.....	190	250-690/HI11406.....	196
244-14A.....	185	150-500/HI11315AZT.....	191	250-700/HI11407.....	196
244-14B.....	185	150-510/HI11317AZT.....	191	250-710/HI11407-1.....	196
244-14C.....	185	150-570/HI11318AZT.....	191	250-740/HI11407A-161.....	196
244-14D/BHP12804.....	185	150-590/HI11318BZT.....	191	250-770/HI11408.....	196
244-14E.....	185	150-620/HI11321AZT.....	191	250-790/HI11409.....	196
244-14F.....	185	150-640/HI11322AZT.....	191	250-810/HI11410.....	197
244-14G.....	186	150-670/HI11323AZT.....	191	250-860/HI11411.....	197
244-14H.....	186	150-671.....	191	250-880/HI11412.....	197
244-14J.....	186	150-690/HI11324AZT.....	191	250-910/HI11413.....	197
244-14K.....	186	150-750/HI11332ZT.....	192	251-020/HI10001F.....	197
244-14L.....	186	150-851/HI11401ZT.....	192	251-040/HI10002F.....	197
244-14N.....	186	150-910/HI11402ZT.....	192	251-070/HI10003F.....	197
244-14X.....	186	150-931/HI11403ZT.....	192	251-101/HI10004Fg.....	197
244-14Z.....	186	150-940/HI11403AZT-1.....	192	251-190/HI11101F.....	197
244-17A.....	186	151-190/HI111ZT21135F.....	192	251-240/HI11102F.....	198
244-17B.....	187	151-301/HI111ZT31135F.....	192	251-260/HI11103F.....	198
244-17C.....	187	151-520/HI111ZTN31135F.....	192	251-280/HI11104F.....	198
244-17K.....	187	151-650/HI113ZT22835F.....	192	251-300/HI11105FE.....	198
244-17U.....	187	151-660/HI113ZT32835F.....	193	251-340/HI11106F.....	198
244-45C(Y).....	187	151-670/HI114ZT.....	193	251-380/HI11107FE.....	198
244-45E.....	187	151-740/HI132ZT.....	193	251-400/HI11108g.....	198
244-92B.....	187	151-800/HI112ZT21135F.....	193	251-470/HI11124F.....	198
244-92G.....	187	151-930.....	193	251-500/HI11128F.....	198
244-95E.....	187	151-940.....	193	251-510/HI11129F.....	199
244-H02.....	188	152-010/HI1116ZT.....	193	251-650/HI11801F.....	199
245-011.....	188	152-020/HI1116ZT-1.....	193	251-660/HI11802F.....	199
244-B7U.....	188	152-100/HI11146ZT.....	193	251-680/HI11803F.....	199
244-B7V.....	188	152-431/HI111ZT41135F.....	194	251-690/HI11804F.....	199
240-A60.....	188	152-570.....	194	251-700/HI11805F.....	199
242-E61.....	188	152-580.....	194	251-710/HI11806F.....	199
242-E91.....	188	152-600.....	194	251-720/HI11810F.....	199
244-FC1(Y).....	188	250-C50.....	194	251-730/HI12601.....	199
150-010/HI10303ZT.....	189	250-B60.....	194	251-740/HI12602.....	200
150-020/HI10304ZT.....	189	250-011/HI11301A.....	194	251-750/HI12603.....	200
150-060/HI10310ZT.....	189	250-040/HI11302.....	194		
150-140/HI11301AZT-2.....	189	250-170/HI11303A.....	194		
150-150/HI11302A-1ZT.....	189				

catalog # page

251-760/HI13201.....	200	250-AS0/HI10302.....	205	260-570/MIA10052.....	211
251-830/HI10013FE.....	200	250-AT0/HI10303.....	205	260-580/MIA10053.....	211
251-840/HI10014FE.....	200	250-AU0/HI10304.....	205	260-602.....	211
251-890/HI1130F.....	200	250-AV0/HI10305.....	205	260-660/MIA10062.....	211
252-010/HI11116.....	200	250-AW0/HI10306.....	205	260-670/MIA10063.....	211
252-440.....	200	250-AX0/HI10307.....	205	260-690/MIA10065.....	211
253-010/HIF5001.....	200	250-AY0/HI10308.....	206	260-700/MIA10067.....	211
150-720.....	201	250-B10/HI10311.....	206	260-730/MIA10071.....	211
253-050/HIF5004.....	201	250-B60/HI16001.....	206	260-750/MIA10074.....	211
254-010/HI12001A.....	201	260-100/MIA10002.....	207	260-770/MIA10076.....	212
254-030.....	201	260-031/MIA10083A.....	207	260-780/MIA10078.....	212
250-C50.....	201	260-090/MIA10001.....	207	260-800/MIA10080A.....	212
150-A01/HI11405ZT.....	201	260-110/MIA10003.....	207	260-810/MIA10082.....	212
150-A11/HI11406ZT.....	201	260-120/MIA10004.....	207	260-820/MIA10084A.....	212
150-A40/HI11407AZT.....	201	260-130/MIA10005.....	207	260-840/MIA10086.....	212
150-A81/HI11408ZT.....	201	260-150/MIA10007.....	207	260-850/MIA10087.....	212
150-AB0/HI11409ZT.....	202	260-160/MIA10008.....	207	260-890/MIA10092B.....	212
150-AC1/HI11410ZT.....	202	260-170/MIA10009.....	207	260-910/MIA10095.....	212
150-AG0/HI11410AZT-2.....	202	260-180/MIA10010.....	208	260-930/MIA6501.....	213
150-AJ0/HI11411ZT.....	202	260-190/MIA10011.....	208	260-940/MIA6502.....	213
150-AM0/HI11412ZT.....	202	260-210/MIA10013.....	208	260-950/MIA6503.....	213
150-AN0/HI11413ZT.....	202	260-220/MIA10014.....	208	260-960/MIA6504.....	213
150-AP0/HI11414ZT.....	202	260-230/MIA10015.....	208	260-980/MIA6506.....	213
150-AS0/HI11417ZT.....	202	260-250/MIA10017.....	208	261-010/MIP10001.....	213
150-AU0/HI11423-1ZT.....	202	260-260/MIA10018.....	208	261-020/MIP10002.....	213
150-AX0/HI11424ZT.....	203	260-280/MIA10020.....	208	261-040/MIP7001.....	213
150-AZ0/HI11427AZT1.....	203	260-310/MIA10023.....	208	261-070/MIP7103F.....	213
150-B20/HI11430ZT.....	203	260-320/MIA10025.....	209	261-080/MIP7104F.....	214
150-BY0/HI11330AZT.....	203	260-330/MIA10028.....	209	261-100/MIP7107F.....	214
150-C70.....	203	260-340/MIA10029.....	209	261-170/MIP8001L.....	214
150-CA0.....	203	260-360/MIA10031.....	209	261-200/MIP8002L.....	214
150-CLO.....	203	260-370/MIA10032.....	209	261-220/MIP8003L.....	214
150-CP0.....	203	260-380/MIA10033.....	209	260-K30.....	214
150-DM0.....	203	260-390/MIA10034.....	209	261-260/MIP8005L.....	214
150-DT0.....	204	260-400/MIA10035.....	209	261-290/MIP8007L.....	214
150-DV0.....	204	260-420/MIA10037.....	209	261-310/MIP8008L.....	214
150-DY0.....	204	260-440/MIA10039.....	210	261-360/MIP8501.....	215
150-ED0.....	204	260-460/MIA10041.....	210	261-390/MIP8503.....	215
150-EF0.....	204	260-470/MIA10042.....	210	261-400/MIP8504.....	215
250-A00/HI11414.....	204	260-480/MIA10043.....	210	261-410/MIP8505.....	215
250-A20/HI11417.....	204	260-490/MIA10044.....	210	261-420/MIP8506.....	215
250-A40/HI11418A.....	204	260-510/MIA10046.....	210	261-490.....	215
250-A50/HI11418A-1.....	204	260-530/MIA10048.....	210	261-520.....	215
250-AB0/HI11423.....	205	260-550/MIA10050.....	210	262-010/MIA11401.....	215
250-AE0/HI11424.....	205	260-560/MIA10051.....	210	262-021.....	215
250-AR0/HI10301.....	205			262-030/MIA11403A.....	216

catalog # page

262-040/MIA12101.....	216	260-AG0/MIA7514.....	221	260-C60/MIA8509.....	226
262-060/MIA12102A.....	216	260-AH0/MIA7515.....	221	260-CA0/MIA8513.....	226
262-070/MIA12103A.....	216	260-AI0/MIA7516.....	221	260-CB0/MIA8514.....	226
262-080/MIA12104A.....	216	260-AK0/MIA7517.....	221	260-JZ0.....	226
262-081.....	216	260-AL0/MIA7518.....	221	260-CD0/MIA8516.....	226
262-090/MIA12105G.....	216	260-AM0/MIA7519.....	221	260-CF0/MIA8518.....	227
262-100/MIA12106A.....	216	260-AN0/MIA7520.....	222	260-CG0/MIA8519.....	227
262-110/MIA12107A.....	216	260-AP0/MIA7521.....	222	260-CJ0/MIA8521.....	227
262-120.....	217	260-AQ0/MIA7523.....	222	260-CN0/MIA8526.....	227
262-130.....	217	260-AR0/MIA7524.....	222	260-CP0/MIA8528.....	227
262-150.....	217	260-AS0/MIA7525.....	222	260-CQ0/MIA8529.....	227
262-160.....	217	260-AT0/MIA7526.....	222	260-CS0/MIA8531.....	227
262-190.....	217	260-AU0/MIA7527.....	222	260-CT0/MIA8532.....	227
262-200.....	217	260-AV0/MIA7529.....	222	260-CU0/MIA8533.....	227
262-210.....	217	260-AW0/MIA7530.....	222	260-CV0/MIA8534.....	228
262-220.....	217	260-AX0/MIA7531.....	223	260-CW0/MIA8535.....	228
262-230.....	217	260-AY0/MIA7532.....	223	260-CX0/MIA8536.....	228
262-240.....	218	260-AZ0/MIA7533.....	223	260-CZ0/MIA8538.....	228
262-250.....	218	260-B10/MIA7535.....	223	260-D00/MIA8539.....	228
262-260.....	218	260-B20/MIA7536.....	223	260-D10/MIA8540.....	228
262-280.....	218	260-B30/MIA7537.....	223	260-D20/MIA8541.....	228
265-011.....	218	260-B40/MIA7522.....	223	260-D30/MIA8542.....	228
265-020.....	218	260-B50/MIA7538.....	223	260-D41/MIA8565.....	228
265-030.....	218	260-B70/MIA7540.....	223	260-DH0/MIA8556.....	229
265-040.....	218	260-B80/MIA7542.....	224	260-DJ0/MIA8552.....	229
262-250.....	218	260-B81/MIA7552.....	224	260-K20.....	229
265-080.....	219	260-B90/MIA7543.....	224	260-DL0/MIA8558.....	229
265-090.....	219	260-BA0/MIA7544.....	224	260-DP0/MIA8564.....	229
265-100.....	219	260-BB0/MIA7545.....	224	260-DQ0/MIA8567.....	229
265-120.....	219	260-BC0/MIA7541.....	224	260-DS0/MIA8569.....	229
265-130.....	219	260-BD0/MIA7546.....	224	260-DV0/MIA8572.....	229
265-140.....	219	260-BG0/MIA7549.....	224	260-DV1.....	229
265-150.....	219	260-BH0/MIA7550.....	224	260-DW2.....	230
265-160.....	219	260-BI0/MIA7553.....	225	260-DX0/MIA8575.....	230
265-170.....	219	260-BK0/MIA7555.....	225	260-DZ0/MIA8571.....	230
260-A30/MIA7501.....	220	260-BN0/MIA7557.....	225	260-E10/MIA8570A.....	230
260-A40/MIA7502.....	220	260-BQ0/MIA7559.....	225	260-E40/MIA9001.....	230
260-A50/MIA7503.....	220	260-BR0/MIA7560.....	225	260-E60/MIA8581A.....	230
260-A70/MIA7505.....	220	260-BX0/MIA8501.....	225	260-EA0/MIA8527.....	230
260-A90/MIA7506.....	220	260-BY0/MIA8502.....	225	260-EZ1.....	230
260-AA0/MIA7507.....	220	260-BZ0/MIA8503.....	225	260-FP0.....	230
260-AB0/MIA7508.....	220	260-C10/MIA8505.....	225	260-FS0.....	231
260-AC0/MIA7509.....	220	260-C20/MIA7601.....	226	260-FT0.....	231
260-AD0/MIA7510.....	221	260-C30/MIA8506.....	226	260-G30.....	231
260-AE0/MIA7512.....	221	260-C40/MIA8507.....	226	260-G50.....	231
260-AF0/MIA7513.....	221	260-C50/MIA8508.....	226	260-G90.....	231

catalog # page

260-GA0.....	231	272-050/MG6305.....	237	280-513.....	243
260-GB0.....	231	272-070/MG6307.....	237	280-515.....	243
260-GG0.....	231	272-080/MG6309.....	237	280-516.....	243
260-GH0.....	231	272-090/MG6310.....	237	280-518.....	244
260-GP0/1260GR00.....	232	272-100/MG6311.....	237	280-540/VAL212.....	244
260-GP1/1260GR10.....	232	272-110/MG6312.....	237	280-560/VAL212H.....	244
260-GQ0.....	232	272-120/MG6313.....	237	280-563.....	244
260-GU0.....	232	272-130/MG6314.....	237	280-564.....	244
260-GU1.....	232	272-150/MG6316.....	237	280-565.....	244
260-GV0.....	232	272-160/MG6317.....	238	280-566.....	244
260-H40.....	232	272-170/MG6318.....	238	280-568.....	244
260-H41.....	232	272-180/MG6319.....	238	280-580/VAL213.....	244
260-J50.....	232	272-230/MG6322A.....	238	280-600/VAL213H.....	245
260-J60.....	233	272-250.....	238	280-602.....	245
260-J70.....	233	272-320.....	238	280-603.....	245
260-JA0.....	233	272-340.....	238	280-670/VAL214A.....	245
260-JB0.....	233	273-010/MG6303.....	238	280-672.....	245
260-JC0.....	233	274-010/MG6401.....	238	280-674.....	245
260-JG0.....	233	274-020/MG6402.....	239	280-675.....	245
260-JH0.....	233	274-030/MG6403.....	239	280-676.....	245
260-JJ0.....	233	274-050/MG6405.....	239	280-678.....	245
260-JL0.....	233	274-090.....	239	280-700/VAL215-2.....	246
260-JR0.....	234	280-010/VAL201.....	241	280-809.....	246
260-JV0.....	234	280-030/VAL201H.....	241	280-810/VAL216.....	246
260-JY0.....	234	280-131.....	241	280-850.....	246
270-010/MG6901.....	235	280-173.....	241	280-860/VAL218.....	246
270-020/MG6902.....	235	280-187.....	241	280-890/VAL218H.....	246
270-030/MG6903.....	235	280-188.....	241	280-891.....	246
270-040/MG6905.....	235	280-200/VAL205.....	241	280-892.....	246
270-050/MG6906.....	235	280-230/VAL205H.....	241	280-912.....	246
270-060/MG6907.....	235	280-234.....	241	280-913.....	247
270-080/MG6908.....	235	280-240/VAL206.....	242	280-960/VAL223.....	247
270-090/MG6911.....	235	280-260.....	242	281-040/VAL841.....	247
270-160.....	235	280-270/VAL206A.....	242	281-060/VAL842.....	247
271-010/MG6904.....	236	280-320/VAL206H.....	242	281-080/VAL844.....	247
271-020/MG6913A.....	236	280-323.....	242	281-130/VAL847.....	247
271-110.....	236	280-371.....	242	281-150/VAL850.....	247
271-150.....	236	280-372.....	242	281-160/VAL851.....	247
271-160.....	236	280-390/VAL208.....	242	281-200/VAL853-2.....	247
271-170.....	236	280-430/VAL208H.....	242	281-170/VAL852.....	248
272-010/MG6301.....	236	280-431.....	243	281-190/VAL853.....	248
272-020/MG6302.....	236	280-450.....	243	281-230/VAL855-1.....	248
272-030/MG6304.....	236	280-460/VAL209-2.....	243	281-280/VAL858B.....	248
		280-490/VAL211.....	243	281-380.....	248
		280-510/VAL211H.....	243	281-390.....	248
		280-512.....	243	282-010/VAL103.....	248

catalog # page

282-040/VAL253.....	248	285-166.....	254	280-A54.....	259
282-050/VAL537.....	248	285-168.....	254	280-A55.....	259
282-060/VAL252.....	249	285-170.....	254	280-AD0/VAL928H.....	259
282-071/VAL539.....	249	285-172.....	254	280-AG1.....	259
282-080/VAL538.....	249	285-190.....	254	280-AN0/VAL9014A.....	259
282-090/VAL813-1.....	249	285-192.....	254	280-AN1.....	259
282-100/VAL687.....	249	285-195.....	254	280-AP0/VAL9015A.....	259
282-110/VAL615.....	249	285-199.....	254	280-AP2.....	260
282-120/VAL616.....	249	285-36Z.....	255	280-AQ0/VAL9016A.....	260
282-130/VAL551.....	250	285-243.....	255	280-AT0/VAL9018A.....	260
282-160/VAL688.....	250	285-246.....	255	280-AT1.....	260
282-170/VAL713.....	250	285-252.....	255	280-AT2.....	260
282-180/VAL773.....	250	285-260.....	255	280-AT3.....	260
282-210/NPD13002.....	250	285-261.....	255	280-AT5.....	260
283-061.....	250	285-262.....	255	280-AT6.....	260
283-460.....	250	285-267.....	255	280-AT7.....	260
284-010/VAL815P.....	250	285-290.....	255	280-ATD.....	261
284-030/VAL816P.....	250	285-291.....	256	280-ATP.....	261
285-010.....	251	285-300.....	256	280-AY0/VAL9021A.....	261
285-012.....	251	285-301.....	256	280-AZ0/VAL902-2.....	261
285-014.....	251	285-305.....	256	280-B10/VAL9023A.....	261
285-015.....	251	285-306.....	256	280-B11.....	261
285-016.....	251	285-312.....	256	280-B20/VAL9024.....	261
285-017.....	251	285-313.....	256	280-B33.....	261
285-019.....	251	285-317.....	256	280-B50/VAL9026A.....	261
285-029.....	251	285-318.....	256	280-B60/VAL9027A.....	262
285-054.....	251	285-319.....	257	280-B80/VAL9029A.....	262
285-080.....	252	285-352.....	257	280-B90/VAL902H.....	262
285-085.....	252	285-354.....	257	280-BB0/VAL903.....	262
285-086.....	252	285-358.....	257	280-BC0.....	262
285-087.....	252	285-359.....	257	280-BE0/VAL9032A.....	262
285-089.....	252	285-361.....	257	280-BN0/VAL903H.....	262
285-123.....	252	285-362.....	257	280-BR0/VAL9040A.....	262
285-124.....	252	285-365.....	257	280-B50/VAL9041A.....	262
285-125.....	252	285-366.....	257	280-BT0/VAL9042A.....	263
285-126.....	252	285-367.....	258	280-BW/VAL9045A.....	263
285-129.....	253	285-368.....	258	280-BY0/VAL9047A.....	263
285-140.....	253	285-369.....	258	280-C00/VAL9049A.....	263
285-141.....	253	285-510.....	258	280-C10/VAL905.....	263
285-143.....	253	285-513.....	258	280-C20/VAL9050A.....	263
285-144.....	253	285-520.....	258	280-C71.....	263
285-146.....	253	285-530.....	258	280-C80/VAL9058A.....	263
285-160.....	253	285-531.....	258	280-CB2.....	263
285-161.....	253	280-A10/VAL225.....	258	280-CB5.....	264
285-162.....	253	280-A50/VAL230.....	259	280-CD1.....	264
285-163.....	254	280-A52.....	259	280-CE0/VAL906-1.....	264

catalog # page

280-CE1.....	264	280-FQ0.....	269	280-L30.....	274
280-CF2.....	264	280-FV0.....	269	280-L40.....	274
280-CF3.....	264	280-GE0.....	269	280-L50.....	274
280-CF5.....	264	280-GE5.....	269	280-LB0.....	274
280-CF7.....	264	280-GE6.....	269	280-LD0.....	275
280-CG1.....	264	280-GE7.....	270	280-LE0.....	275
280-CG2.....	265	280-GE8.....	270	280-LG0.....	275
280-CG3.....	265	280-GEC.....	270	280-LH0.....	275
280-CH0/VAL9063A.....	265	280-GEE.....	270	280-LH2.....	275
280-CK0/VAL9066AH.....	265	280-GEF.....	270	280-LH3.....	275
280-CK2.....	265	280-GL1.....	270	280-LH9.....	275
280-CN0/VAL9069A.....	265	280-GN0.....	270	280-LK0.....	275
280-CN2.....	265	280-H13.....	270	280-LZ0.....	275
280-CP1.....	265	280-H14.....	270	280-LZ3.....	276
280-CP2.....	265	280-HK1.....	271	280-M00.....	276
280-CQ0/VAL9070A.....	266	280-HR0.....	271	280-M0A.....	276
280-CT0/VAL9072A.....	266	280-HY0.....	271	280-M0F.....	276
280-CT3.....	266	280-J40.....	271	280-M04.....	276
280-CV0/VAL9074A.....	266	280-J50.....	271	280-M06.....	276
280-CX0/VAL9075A.....	266	280-J80.....	271	280-M07.....	276
280-GX1.....	266	280-JA0.....	271	280-M10.....	276
280-CX2.....	266	280-JC0.....	271	280-M21.....	276
280-CZ1.....	266	280-JD0.....	271	280-M40.....	277
280-CZ4.....	266	280-JF0.....	272	280-M41.....	277
280-D00/VAL9077A.....	267	280-JJ0.....	272	280-M50.....	277
280-D2A.....	267	280-JS0.....	272	280-M51.....	277
280-D2E.....	267	280-JW0.....	272	280-M60.....	277
280-D6A.....	267	280-K30.....	272	280-M62.....	277
280-D01.....	267	280-K61.....	272	280-M63.....	277
280-D10/VAL9078A.....	267	280-KC0.....	272	280-M70.....	277
280-D20/VAL9079A.....	267	280-KD0.....	272	280-M71.....	277
280-D29.....	267	280-KD3.....	272	280-M82.....	278
280-D60/VAL9083A.....	267	280-KG0.....	273	280-M91.....	278
280-D62.....	268	280-KH1.....	273	280-MA1.....	278
280-DD0/VAL9091A.....	268	280-KH2.....	273	280-MB1.....	278
280-DJ0/VAL927.....	268	280-KH4.....	273	280-MB2.....	278
280-DT0/VAL928.....	268	280-KH5.....	273	280-MB9.....	278
280-E10.....	268	280-KH7.....	273	280-MBB.....	278
280-F50.....	268	280-KHG.....	273	280-MBF.....	278
280-F52.....	268	280-KHH.....	273	280-MC0.....	278
280-F54.....	268	280-KHP.....	273	280-MC1.....	279
280-FG0.....	268	280-KW0.....	274	280-MD1.....	279
280-FH0.....	269	280-KY0.....	274	280-ME0.....	279
280-FJ0.....	269	280-L00.....	274	280-ME1.....	279
280-FK0.....	269	280-L10.....	274	280-MF0.....	279
280-FM0.....	269	280-L20.....	274	280-MH0.....	279

catalog # page



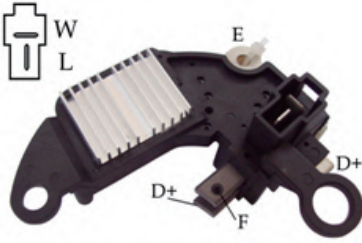
280-MH1.....	279	285-14J.....	284	29Z-030.....	290
280-MJ2.....	279	285-14Q.....	284	7430.....	291
280-MK0.....	279	285-16G.....	285	7430A.....	291
280-18B.....	280	285-19H.....	285	7431.....	291
280-18C.....	280	285-19P.....	285	7431A.....	291
280-18E.....	280	285-24C.....	285	7432.....	291
280-18F.....	280	285-24D.....	285	7433.....	291
280-18S.....	280	285-24E.....	285	7650.....	291
280-18T.....	280	285-31B.....	285	7651.....	291
280-18X.....	280	285-31E.....	285	7652.....	291
280-32B.....	280	285-36A.....	285	7653.....	291
280-32C.....	280	285-36C.....	286	DB8330.....	292
280-60B.....	281	285-36H.....	286	DB8331.....	292
280-60G.....	281	285-36L.....	286	DB8334.....	292
280-67D.....	281	285-36M.....	286	DB8335.....	292
280-67E.....	281	290-070/MOP3006.....	287	DB001.....	292
280-67F.....	281	290-071/MOP3006A.....	287	DB002.....	292
280-67M.....	281	290-300.....	287	DB003.....	292
280-69B.....	281	290-400.....	287	DB004.....	292
280-80A.....	281	290-402.....	287	IN8010.....	292
280-80D.....	281	290-470.....	287	IN8015.....	292
280-80F.....	282	291-010/DC1670.....	287	IN8025.....	292
280-80H.....	282	291-020/DC1867.....	287	IN8030.....	292
280-80J.....	282	291-050/MOP6001.....	287	QZ7540.....	293
280-80J.....	282	291-070/MOP6041.....	288	QZ7541.....	293
280-80M.....	282	291-080/MOP6064.....	288	DJ1001.....	293
280-80N.....	282	291-090/MOP6065.....	288	DJ524.....	293
280-80Q.....	282	291-100/MOP6072.....	288	DJ527.....	293
280-80R.....	282	291-110/MOP6300.....	288	DJ528.....	293
280-80U.....	282	291-120/MOP6301.....	288	DJ797.....	294
280-80W.....	283	291-210/ZLB-07.....	288	DJ985.....	294
280-80Y.....	283	291-240/ZLB-08.....	288	DT182.....	294
280-89A.....	283	291-270/ZLB-09.....	288	DT182-1.....	294
285-01Q.....	283	291-300/ZLB-10.....	289	DT22.....	294
285-01S.....	283	29Z-040.....	289	LJ79026.....	294
285-01T.....	283	291-360/ZLB-12.....	289	LJ79027.....	294
285-01W.....	283	291-410/ZLB-17.....	289	S5231.....	295
285-08A.....	283	291-420/ZLB-18.....	289	SJ5231.....	295
285-08B.....	283	291-430/ZLB-19N.....	289	SJ5260.....	295
285-08C.....	284	291-440/ZLB-19P.....	289	RN354P.....	295
285-08D.....	284	291-470.....	289	RN35MP.....	295
285-08E.....	284	291-520.....	289	RN504P.....	295
285-08F.....	284	29Z-010.....	290	RN50MN.....	295
285-08G.....	284	29Z-020.....	290	QZ3520.....	296
285-08H.....	284			QZ3521.....	296
285-08X.....	284				

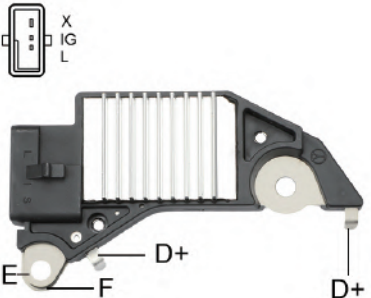
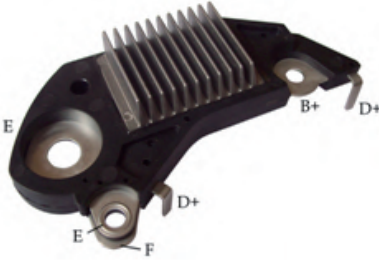






catalog # page




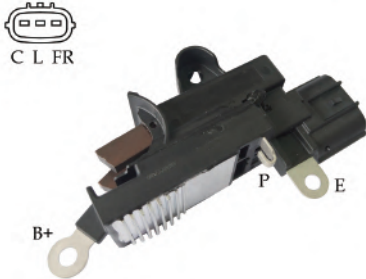
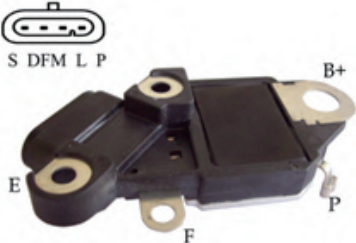




QZ5020.....	296	BN804P.....	300	14B03800.....	304
QZ3521.....	296	BN804N.....	300	14B04000.....	304
S-15B.....	296	BN80LP.....	300	14B04100.....	304
S-16B.....	296	BN80LN.....	300	14B04200.....	304
7700.....	296	BN80MP.....	300	14B04300.....	304
7701.....	296	BN80MN.....	300	14B04400.....	304
7780-B.....	296	BN80HP.....	300	14B04600.....	304
7781-B.....	296	BN80HN.....	300	14B04800.....	304
7770.....	296	14A00100.....	301	14B05100.....	304
7771.....	296	14A00200.....	301	14B05400.....	304
7800.....	297	14A00300.....	301	14B06600.....	305
7801.....	297	14B0A600.....	301	14B06700.....	305
7880.....	297	14B0B700.....	301	14B06900.....	305
7881.....	297	14B09K00.....	301	14B08900.....	305
8624.....	297	14B09N00.....	301	14B09100.....	305
8625.....	297	14B00100.....	301	14B09200.....	305
7770-1.....	297	14B00200.....	301	14B09300.....	305
7771-7.....	297	14B00300.....	301	14B09400.....	305
7812.....	297	14B00400.....	301	14B09700.....	305
7813.....	297	14B00500.....	301	14C0A000.....	305
7814.....	297	14B00600.....	302	14C0AH00.....	305
7815.....	297	14B00700.....	302	14C0AJ00.....	305
7900.....	298	14B00800.....	302	14C0AK00.....	306
7901.....	298	14B00900.....	302	YD-T032.....	306
7902.....	298	14B01000.....	302	14C00300.....	306
7903.....	298	14B01100.....	302	14C00400.....	306
7960.....	298	14B01200.....	302	14C00500.....	306
7961.....	298	14B01300.....	302	14C01100.....	306
7980.....	298	14B01400.....	302	14C01200.....	306
7981.....	298	14B01500.....	302	14C01600.....	306
BN354P.....	299	14B01600.....	302	14C01700.....	306
BN354N.....	299	14B01700.....	302	14C01900.....	306
BN35LP.....	299	14B01800.....	303	14C02000.....	306
BN35LN.....	299	14B01900.....	303	14C02100.....	306
BN35MP.....	299	14B02000.....	303	14C02200.....	307
BN35MN.....	299	14B02100.....	303	14C02400.....	307
BN35HP.....	299	14B02200.....	303	14C02500.....	307
BN35HN.....	299	14B02300.....	303	14C02600.....	307
BN504P.....	299	14B02400.....	303	14C02900.....	307
BN504N.....	299	14B02500.....	303	14C03000.....	307
BN50LP.....	299	14B02600.....	303	14C03100.....	307
BN50LN.....	299	14B02800.....	303	14C03300.....	307
BN50MP.....	299	14B02900.....	303	14C03400.....	307
BN50MN.....	299	14B03100.....	303	14C03500.....	307
BN60HP.....	300	14B03300.....	304	14C03700.....	307
BN60HN.....	300	14B03700.....	304	14C03800.....	307



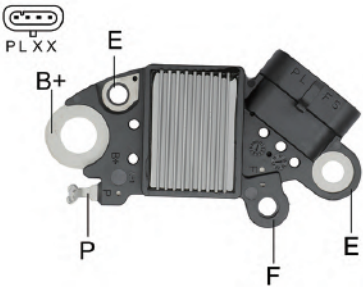


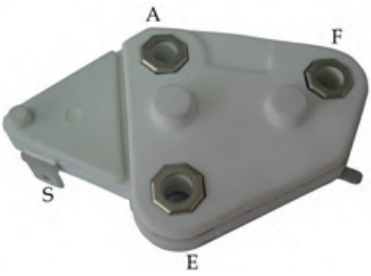
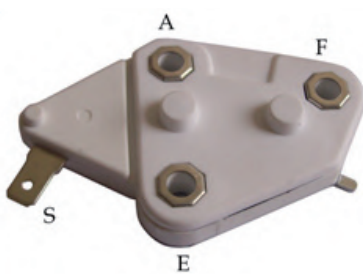
catalog # page

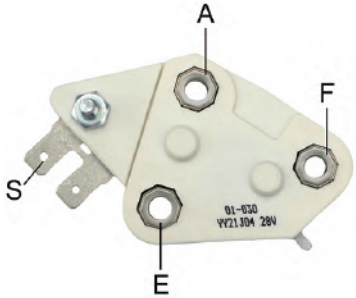
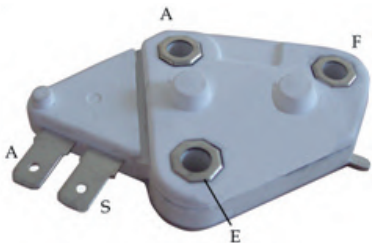
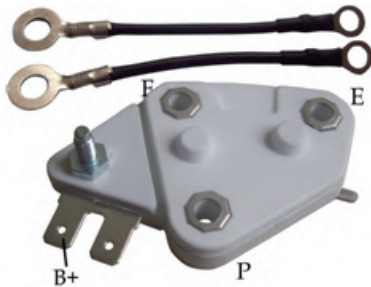

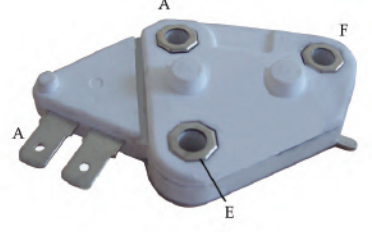
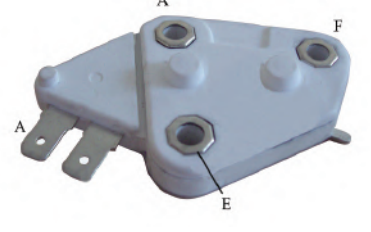

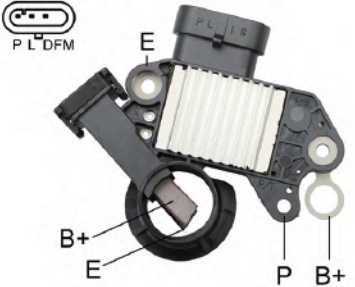
14C04000.....	308	14R02300.....	311
14C04100.....	308	14R02400.....	311
14C04200.....	308	14R02600.....	312
14C04300.....	308	14R02800.....	312
14C04400.....	308	RJ003.....	312
14C04500.....	308	RJ014.....	312
14C04600.....	308	RJ015.....	312
14C04700.....	308	14T00100.....	312
14C04800.....	308	14T00200.....	312
14C05000.....	308	14T00300.....	312
14C05100.....	308	14T00400.....	312
14C05200.....	308	14T00500.....	312
14C05300.....	309	14T00600.....	312
14C05400.....	309	14T00700.....	312
14C05600.....	309	14T00800.....	313
14C05700.....	309	14T00900.....	313
14C05800.....	309	14T01000.....	313
14C05900.....	309	14T01100.....	313
14C06700.....	309	14T01200.....	313
14C06800.....	309	14T01300.....	313
14C06900.....	309	14T01400.....	313
14C07000.....	309	14T01500.....	313
14C07100.....	309	14T01600.....	313
14C07200.....	309	14T01700.....	313
14C07300.....	310	14T01800.....	313
14C07400.....	310	14T01900.....	313
14C07900.....	310	14T02000.....	314
14C08000.....	310	14T02100.....	314
14C08100.....	310	14T02200.....	314
14C08500.....	310	14T02500.....	314
14C10100.....	310	14T02600.....	314
14R00100.....	310	14T02700.....	314
14R00200.....	310	14T02900.....	314
14R00400.....	310	14T03000.....	314
14R00500.....	310	14T03100.....	314
14R01000.....	310	14T03400.....	314
14R01200.....	311	14T03500.....	314
14R01400.....	311	14T03600.....	314
14R01500.....	311	14T03800.....	315
14R01600.....	311	14T03900.....	315
14R01700.....	311	14T04000.....	315
14R01800.....	311	14T04100.....	315
14R01900.....	311	14T04200.....	315
14R02000.....	311	14T04300.....	315
14R02100.....	311	14T04400.....	315
14R02200.....	311	14T04500.....	315
		14T04600.....	315
		14T07100.....	315

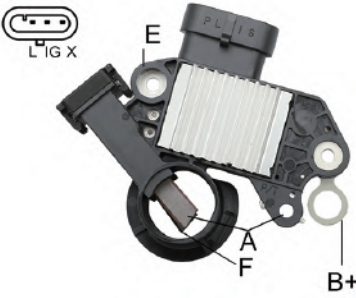
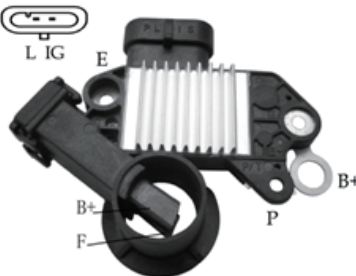

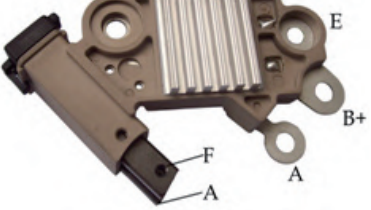


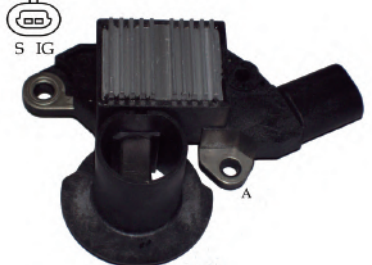
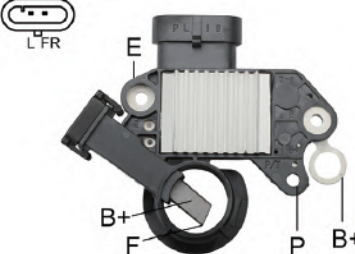
300-010/00-001	300-020/00-003	301-010/00-002
FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 37701 37703 37705 37707 CARGO 131277 LESTER 12045 12046 12072 12074 WAI 35-9209 MOBILETRON VR-LC111 TRANSPO IL223 FIT UNIT CA600IR 	FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO 37735 UCB153 28002 84959 CARGO 135231 LESTER 12428 WAI 35-9211 MOBILETRON VR-LC111B TRANSPO IL225 	FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 37534 37538 37541 37555 CARGO 130637 LESTER 12073 14013 14014 14025 WAI 35-9200 MOBILETRON VR-LC100 TRANSPO IL211 
302-010/00-005		
FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. 		



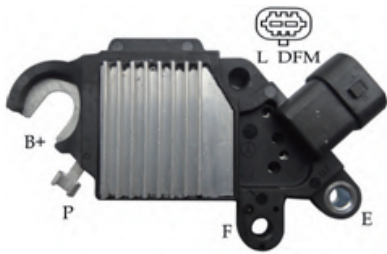
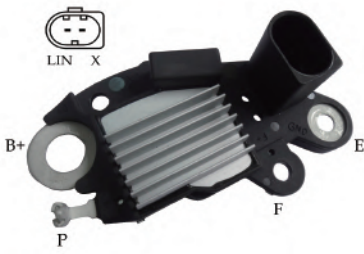
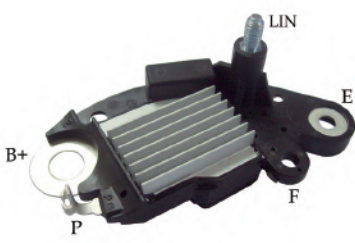

310-010/01-001 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 276010 LESTER 18005 8006 8280 8282 MOBILETRON VR-D276 TRANSPO D403 CARGO 139467 WAI D403 	310-030/01-004 FEATURES A-Circuit Voltage Set Point 14.80V REFERENCES.. OEM NO 10475019 19009701 10479914 LESTER 21148 8239 8545 8546 MOBILETRON VR-D701 TRANSPO DE701 CARGO 135336 WAI 35-152 FIT UNIT CA8611R 	310-050/01-007 FEATURES B-Circuit Voltage Set Point 14.70V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM Function REFERENCES.. FIT UNIT GM 10463605 LESTER 8190-11 8197-7 MOBILETRON VR-D705H TRANSPO D705XHD CARGO 231184 
310-060/01-008 FEATURES B-Circuit Voltage Set Point 14.70V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. FIT UNIT GM 10463390 LESTER 12168 8155-3 MOBILETRON VR-D702H TRANSPO D702XHD D702SE CARGO 135547 	310-070/01-013 FEATURES B-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. FIT UNIT 33003511 33003512 LESTER 7801-11 7801-3 MOBILETRON VR-D694HD TRANSPO D411HD CARGO 131905 	310-080/01-014 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. DAEWOO UNIT 96224431 96252547 MOBILETRON VR-D675H 
310-110/01-031 FEATURES B-Circuit Voltage Set Point 14.70V Soft Start 32% LRC 5 sec Field, Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. FIT UNIT GM 93175796 93175943 LESTER 21516 MOBILETRON VR-D711 TRANSPO DE708 CARGO 231796 	310-120/01-033 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 32% Field, Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO 1116432 LESTER 7954 MOBILETRON VR-D432 TRANSPO D432 CARGO 133589 	310-200/01-064 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM Function REFERENCES.. OEM NO 1116413 1116430 1116445 LESTER 7806 7904 7942 7966 MOBILETRON VR-0445 VR-D681H TRANSPO D445 CARGO 133582 

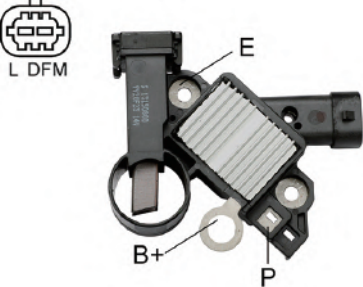




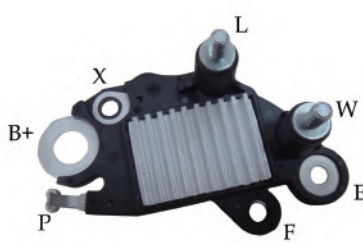
310-310 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 31 % LRC 5 Sec Field Short Circuit Protection DFM Function REFERENCES.. FIT UNIT 35-447-001 LESTER 11192 MOBILETRON VR-D298 TRANSPO D2298 	310-321 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30% C Terminal Regulator Self Exciting Function DFM Function REFERENCES.. FIT UNITS 37300-2E700 LESTER 10242 DELCO 8400320 MOBILETRON VR-D299 	310-331 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30% C Terminal Regulator Self Exciting Function DFM Function REFERENCES.. FIT UNITS 37300-2G900 8400258 LESTER 11694 
310-401 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30% C Terminal Regulator Self Exciting Function DFM Function REFERENCES.. OEM NO 37300-2E250 	311-010/01-005 FEATURES B-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function Self Exciting Function REFERENCES.. OEM NO 1051-4471 4152 860-0032 LESTER 8701 8702 8703 8704 TRANSPO D4152 	311-020/01-016 FEATURES B-Circuit Voltage Set Point 14.20V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function Self Exciting Function REFERENCES.. OEM NO 19020407 LESTER 8363 8364 8369 8570 TRANSPO D907 MOBILETRON VR-D481 
311-030/01-025 FEATURES B-Circuit Voltage Set Point 14.70V Soft Start 30% LRC 5 sec Field Circuit Protection Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. FIT UNIT 10464438 10464468 LESTER 8237 8247 8274 MOBILETRON VR-D235 TRANSPO D200XHD CARGO 232665 	313-FZ0 FEATURES B-Circuit voltage set point 14.50 V soft start 12.5% under / over voltage indication DFM function REFERENCES.. OEM NO 10542172 	311-050/01-037 FEATURES A-Circuit Voltage Set Point 14.55 V REFERENCES.. DELCO 220087 271940 LESTER 21031 8460 8461 8463 MOBILETRON VR-D740 TRANSPO D940 CARGO 233975 

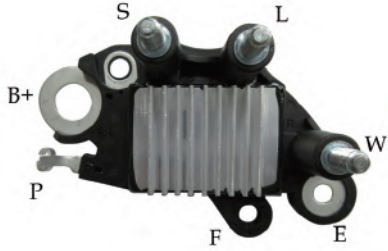






311-060/01-039 FEATURES B-Circuit Voltage Set Point 14.20V Soft Start 30% LRC 5 sec Field Circuit Protection Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 15163024 15163025 LESTER 8490-3 8490-9 8491-3 TRANSPO D202XHD MOBILETRON VR-D233A 	311-070/01-054 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 271940 LESTER 8460 8461 8465 8466 MOBILETRON VR-D740 TRANSPO D940 	311-100/01-069 FEATURES B-Circuit Voltage Set Point 28.50V Soft Start 30% Field Shorted Circuit Protection S-IG Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. DELCO 61006317 VOLTAG ARD2169 
311-360 FEATURES B-Circuit Voltage Set Point 28.00V Soft Start 18% LRC 2.5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. FIT UNIT 8600365 13SI LESTER 8730 	311-370 FEATURES B-Circuit Voltage Set Point 28.50V Soft Start 18% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. LESTER 8298 8371 8462 8515 TRANSPO DE1338 FIT UNIT 28SI REMY 10501338 	311-390 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 12.5% Field Shorted Circuit Protection Under / Over voltage Indication DFM Function REFERENCES.. OEM NO 10503579 LESTER 8292 8489 8497 MOBILETRON VR-D579H TRANSPO D3579 
312-010/01-010 FEATURES A-Circuit Voltage Set Point 14.10V Field Shorted Circuit Protection REFERENCES.. OEM NO 1116360 1116390 1116407 LESTER 7136 7262 7266 7564 MOBILETRON VR-D669C TRANSPO D21 D33 D22 WAI 35-126 	312-040/01-026 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 13472557 LESTER 20206 20441 20445 20794 MOBILETRON VR-D673C TRANSPO DE606 	312-050/01-027 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 94648534 D673 WAI 35-153 MOBILETRON VR-D690 TRANSPO DE608 

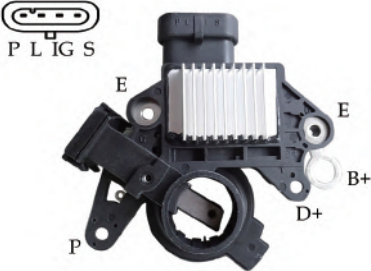





312-060/01-030 FEATURES A-Circuit Voltage Set Point 28.1 V REFERENCES.. MOBILETRON VR-D687 TRANSPO D30 D104HD CARGO 130510 134751 LESTER 7129 7160 7163 7175 	312-070/01-032 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 1116380 1116384 1116387 LESTER 7172 7134 7135 7137 MOBILETRON VR-D668C TRANSPO D101HD CARGO 130668 WAI 35-101 	312-080/01-046 FEATURES B-Circuit Voltage Set Point 14.60V Self Exciting Function REFERENCES.. OEM NO 10SI 12SI 15SI 17SI LESTER 7127 TRANSPO D713 D10AC 
312-090/01-047 FEATURES A-Circuit Voltage Set Point 14.00V REFERENCES.. OEM NO 1116389 1116406 LESTER 7136 7138 7162 MOBILETRON VR-D669C TRANSPO D102HD CARGO 134750 WAI 35-105 	312-170 FEATURES A-Circuit Voltage Set Point 14.60 V REFERENCES.. MOBILETRON VR-D689 TRANSPO D10SE12 	312-180 FEATURES A-Circuit Voltage Set Point 28.10 V REFERENCES.. MOBILETRON VR-D668B TRANSPO D10SE24 
312-200 FEATURES A-Circuit Voltage Set Point 14.10V REFERENCES.. OEM NO 35-131 1116441 TRANSPO D691 	313-010/01-018 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function REFERENCES.. 	313-020/01-019 FEATURES B-Circuit Voltage Set Point 14.70V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self Exciting Function REFERENCES.. 


313-030/01-020 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. LESTER 8483A TRANSPO D2262 	313-050/01-021 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 12.5% Field Shorted Circuit Protection Under / Over voltage Indication DFM Function REFERENCES.. OEM NO 10503579 LESTER 8292 8489 8497 MOBILETRON VR-D579H TRANSPO D3579 	313-060/01-023 FEATURES A-Circuit Voltage Set Point 14.30V REFERENCES.. OEM NO 19020204 19020207 19020208 LESTER 8720 8721 8722 WAI 3501-1111 TRANSPO D2198 NOTE 11SI 
313-070/01-038 FEATURES A-Circuit Voltage Set Point 28.45V REFERENCES.. OEM NO 2502-600C 	313-090/01-048 FEATURES A-Circuit Voltage Set Point 28.30V REFERENCES.. OEM NO 8600210 WAI 8688 	313-100/01-052 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 271840 LESTER 8470 TRANSPO D840 
313-110/01-053 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 271850 19020704 19020707 LESTER 8471 TRANSPO D850 	313-120/01-062 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 Sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function REFERENCES.. LESTER 8486 TRANSPO D816 GM 220737 GNR-D021 MOBILETRON VR-D737 	313-130/01-066 FEATURES A -Circuit Voltage Set Point 14.70 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under / Over Voltage Indication DFM Function REFERENCES.. MOBILETRON VR-D721 LESTER 20089 LUCAS LRA03218 








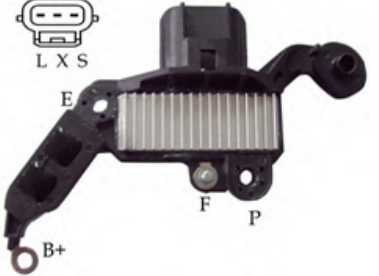
314-010/01-049 FEATURES B-Circuit RVC=0 Vset=13.80V RC=70% Vset=14.45V Soft Start 18.75% LRC 2.5 sec L Terminal Drives Choke DFM function REFERENCES.. OEM NO 1509392 15093929 LESTER 8301 8302 MOBILETRON VR-D755 TRANSPO D3587 	314-020/01-050 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 20% LRC 5 sec Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. 	314-030/01-051 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 20% LRC 5 sec Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. CARGO 331774 LESTER 24092 24095 DELCO 8400157 8400158 TRANSPO D3588 
314-040/01-071 FEATURES B-Circuit RVC=0 Vset=13.80V RC=70% Vset=14.45V Soft Start 18.75% LRC 2.5 sec DFM function RVC Regulator REFERENCES.. OEM NO ADE0005A-600 	314-050 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 18700018 FIT UNIT 35SI 	314-060 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 5 Sec Self Exciting Function LIN2 Class04 LIN Regulator REFERENCES.. OEM NO 10532951/8400306 
315-010/01-063 FEATURES B-Circuit RVC=0 Vset=13.80V RC=70% Vset=14.45V Soft Start 18.75% LRC 2.5 sec L Terminal Drives Choke DFM function RVC Regulator REFERENCES.. OEM NO 13579662 MOBILETRON VR-D186 TRANSPO D2024 	315-020/01-065 FEATURES B-Circuit RVC=0 Vset=13.80V RC=70% Vset=14.45V Soft Start 18.75% LRC 2.5 sec L Terminal Drives Choke DFM function RVC Regulator REFERENCES.. OEM NO 13579666 MOBILETRON VR-D583 TRANSPO D2022 LESTER 20079 20096 21514 	315-050 FEATURES B-Circuit RVC=0 Vset=13.80V RC=70% Vset=14.45V Soft Start 18.75%,LRC 2.5 sec DFM function RVC Regulator REFERENCES.. FIT UNIT 13500187 13579675 MOBILETRON VR-D580 WAI D2023 LESTER 20587 







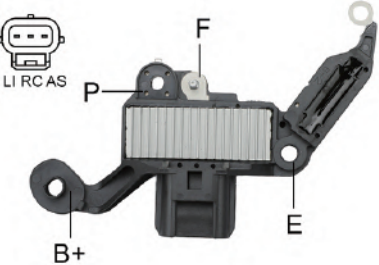
315-080 FEATURES B-Circuit RVC=0 Vset=13.80V RC=70% Vset=14.45V Soft Start 18.75 % LRC 2.5 sec L Terminal Drives Choke DFM function RVC Regulator REFERENCES.. FIT UNIT 222732 	315-090 FEATURES B-Circuit Voltage Set Point 28.40V Soft Start 12.5% Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke Self Exciting Function REFERENCES.. OEM NO 16.915.975 11.204.354 IA1589 	316-010/01-055 FEATURES B-Circuit Voltage Set Point 14.80 V Soft Start 18.75 %,LRC 10 Sec Field, Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. DELCO 236563 LESTER 23162 TRANSPO DE1750 MOBILETRON VR-D745 
316-030/01-061 FEATURES B-Circuit Voltage Set Point 14.80 V Soft Start 18.75 %,LRC 10 Sec Field, Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. CARGO 235542 LESTER 23161 TRANSPO DE1650 MOBILETRON VR-D744 	317-010 FEATURES B-Circuit Voltage Set Point 14.3 V Soft Start 12.5% LRC 5 sec Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke REFERENCES.. FIT UNIT 8600566 8600567 LESTER 12738 	318-010 FEATURES B-Circuit Voltage Set Point 14.20 V Soft Start 12.5% Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke REFERENCES.. DELCO 8600300 LESTER 7739 TRANSPO D8684 
318-020 FEATURES B-Circuit Voltage Set Point 28.0 V Soft Start 12.5% Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke REFERENCES.. DELCO 55SI LESTER 7741 FIT UNIT 3600530 	318-030 FEATURES B-Circuit Voltage Set Point 28.0 V Soft Start 12.5% Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke REFERENCES.. DELCO 8600366 LESTER 21212 FIT UNIT 321-8932 	318-040 FEATURES B-Circuit Voltage Set Point 14.20 V Soft Start 12.5% Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke REFERENCES.. OEM NO 3218902 8600375 13SI 










318-050 FEATURES B-Circuit Voltage Set Point 14.20 V Soft Start 12.5% Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke REFERENCES.. 	318-060 FEATURES B-Circuit Voltage Set Point 14.20 V Soft Start 12.5% Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke REFERENCES.. OEM NO 10521033 10527694 LESTER 8719 8718 TRANSPO D1033 MOBILETRON VR-D1033 	318-070 FEATURES B-Circuit Voltage Set Point 28.00V Soft Start 12.5 % Field Shorted Circuit Protection Under/Over Voltage Indiction REFERENCES.. OEM NO 8600467 8600468 8600469 LESTER 8717 8762 TRANSPO D1334 
31Y-930 FEATURES A-Circuit Voltage Set Point 14.50 V Field Shorted Circuit Protection REFERENCES.. OEM NO 333318 	31Y-940 FEATURES B-Circuit Voltage Set Point 14.60 V Soft Start 12.50% LRC 7.5 Sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO JFZ1818 	31Y-950 FEATURES B-Circuit Voltage Set Point 14.60 V Soft Start 12.50% LRC 7.5 Sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO JFZ192D 
38Y-120 FEATURES B-Circuit Voltage Set Point 14.60 V Soft Start 12.50% LRC 7.5 Sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO JFZ1929V 	313-CV0 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 18% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. MOBILETRON VR-D502 TRANSPO D2025 FIT UNIT LG1750 G4D14 DELCO 220116 SSANGYONG 66215-43006 66415-40102 	313-D20 FEATURES B-Circuit Voltage Set Point 14.40V Soft Start 18.75% LRC 2.5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self Exciting Function REFERENCES.. LESTER 11901 FIT UNIT 11.204.793 AAG5147 1A1669 




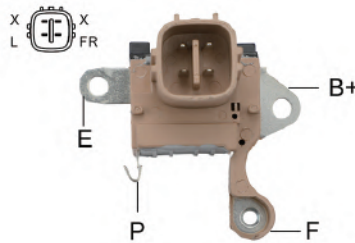



313-D70 FEATURES A-Circuit Voltage Set Point 14.70 V REFERENCES.. OEM NO 220295 LESTER 8723 8725 8726 TRANPO D2295 FIT UNIT 8400111 8600002 	313-DW0 FEATURES A-Circuit Voltage Set Point 14.70V Soft Start 31% LRC 5Sec Field Shorted Circuit Protection Under / Over Voltage Indication REFERENCES.. FIT UNIT 220736 96936135 96936136 LESTER 24096 MOBILETRON VR-K09 TRANPO D2020 	313-DX0 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 12.5% LRC 2.5 Sec Field Lamp Shorted Circuit Protection Under Voltage Indication DFM Function L Terminal Drive Choke Self Exciting Function REFERENCES.. FIT UNIT JFZ1929AB 
313-E80 FEATURES B-Circuit RVC=0 Vset=13.8V RC=70% Vest=14.45V Soft Start 18.75% LRC 2.5 sec DMF function RVC Regulator REFERENCES.. LESTER 22671 FIT UNIT KRAUF ALD7711BS 	313-ET0 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 12.5% LRC 2.5 Sec Field Lamp Shorted Circuit Under / Over Voltage Indication REFERENCES.. LESTER 20089 FIT UNIT ERA 220006 	310-380 FEATURES B-Circuit Voltage Set point 14.30 V Soft Start 12.5% LRC 3Sec Field Shorted Circuit Protection LIN 1.3 class15 LIN Regulator REFERENCES.. DELCO 8400293 KIA 37300-2F300 MOBILETRON VR-D291 
310-430 FEATURES B-Circuit Voltage Set point 14.50 V Soft Start 12.5% LRC 3 Sec Field Shorted Circuit Protection LIN 1.3 class13 LIN Regulator REFERENCES.. OEM NO 37300-2A900 	310-480 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 12.5% LRC 2.5 sec Field Shorted Circuit Protection Under/ Over Voltage Indication Self exciting REFERENCES.. OEM NO JFZ1928F-700 	311-440 FEATURES B-Circuit Voltage Set Point 28.50 V Soft Start 12.5% LRC 2.5 sec Field Shorted Circuit Protection Under/ Over Voltage Indication Self exciting REFERENCES.. 









314-070		
FEATURES B-Circuit Voltage Set Point 14.40V Soft Start 12.5% LRC 2.5 sec Field, Lamp Shorted Circuit Protection Under Voltage Indication P open Indication DFM function REFERENCES.. OEM NO 10544595 		










320-010/02-001 FEATURES A-Circuit Voltage Set Point 14.80V REFERENCES.. OEM NO F1DU-10C359-AA F1DZ-10C359-A RG821 136230 232414 CARGO LESTER 7749 7750 7751 7752 WAI 35-205 MOBILETRON VR-F786BH TRANSPO F794B  	320-020/02-008 FEATURES A-Circuit Voltage Set Point 14.45V Field Shorted Circuit Protection Over Voltage Indication REFERENCES.. OEM NO F3A-10316-A GR-811 135854 7784 CARGO LESTER 35-206 VR-F811 WAI MOBILETRON F785 TRANSPO 71-20005 NOTE  	320-030/02-009 FEATURES A-Circuit Voltage Set Point 14.6V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO F5RZ-10316-A 138185 CARGO 20150 7774 7775 7792 LESTER 35-209 WAI VR-F818 MOBILETRON F786 TRANSPO 71-20006 NOTE CA1034IR FIT UNIT  
320-040/02-010 FEATURES A-Circuit Voltage Set Point 14.45V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication "ISA"Terminals REFERENCES.. OEM NO F4ZZ-10316-A GR-814 232415 CARGO 7748 7751 7770 7777 LESTER 35-207-4 WAI VR-F814 MOBILETRON F795 TRANSPO  	320-050/02-014 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO E43F-10316AA E73F-10316-AB 7088 7716 7732 7735 CARGO LESTER VR-F784H WAI F784HD MOBILETRON TRANSPO  	321-010/02-005 FEATURES A-Circuit Voltage Set Point 14.45V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO F50U-10316-A 138663 CARGO 7781 7787 8251 8436 LESTER 35-208 WAI VR-F815 MOBILETRON F796 TRANSPO  
321-020/02-006 FEATURES A-Circuit Voltage Set Point 14.45V Field Shorted Circuit Protection Over Voltage Indication REFERENCES.. OEM NO F6DU-10C359-AA 230066 CARGO 7781 7787 8251 8436 LESTER 35-210 WAI VR-F817 MOBILETRON F798 TRANSPO  	321-030/02-018 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. OEM NO YF1U-10C359-AA 8269 8313 8314 8403 CARGO LESTER VR-F822 WAI F797 MOBILETRON TRANSPO  	323-020/02-013 FEATURES A-Circuit Voltage Set Point 14.35 V Soft Start 30 % Field, Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. MOBILETRON VR-VN002 TRANSPO F610  










322-010/02-003 FEATURES A-Circuit Voltage Set Point 14.5 V Soft Start 30 % Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Gray with Gray Cover For use on: Ford 6G Series IR/ER Alternators Automobiles: FORD Crown Victoria, Lincoln REFERENCES.. OEM NO F8WU-10C359-AB CARGO 230065 LESTER 7341 7795 7796 7797 WAI 35-212 MOBILETRON VR-F900 TRANSPO F600 	322-020/02-004 FEATURES A-Circuit Voltage Set Point 14.45V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication White with Orange Cover REFERENCES.. OEM NO XS7U-10C359-AC CARGO 233775 LESTER 8250 8254 8259 8263 WAI 35-214 MOBILETRON VR-F930 TRANSPO F603 	322-040/02-007 FEATURES A-Circuit Voltage Set Point 14.70 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Gray with Green Cover REFERENCES.. OEM NO VP3C3U10C359AA LESTER 8266 8304 8306 8307 MOBILETRON VR-F901 TRANSPO F605 
322-060/02-011 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V White with Blue Cover PCM Regulator REFERENCES.. OEM NO XW4U-10C359-AB CARGO 233232 LESTER 7788 8253 8255 8256 WAI 35-2135 MOBILETRON VR-F910 TRANSPO F601 	322-080/02-016 FEATURES A-Circuit Voltage Set Point 14.30 V Soft Start 30 % LRC 5 sec Field, Lamp Shorted Circuit Protection Sense Loss Indication Under / Over Voltage Indication DFM function White with White Cover REFERENCES.. TRANSPO F602 CQ NO CQ1010255 FORD NO XS7U-10C359-AC CARGO 233232 LESTER 8250 8309 8400 	322-090/02-017 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% LRC 5 sec Field Lamp Shorted Circuit Protection Sense Loss Indication Under Voltage Indication Over Voltage Indication DFM function Black with Black Cover REFERENCES.. OEM NO UP4LIU-10C359-AA LESTER 8265 8303 8305 8518 MOBILETRON VR-F931 TRANSPO F606 
323-010/02-012 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. CARGO 235601 LESTER 8440 8527 8528 8531 MOBILETRON VR-VN001 TRANSPO F611 FIT UNIT CA1857IR 		




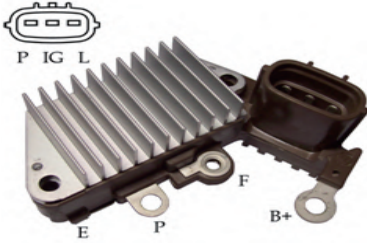

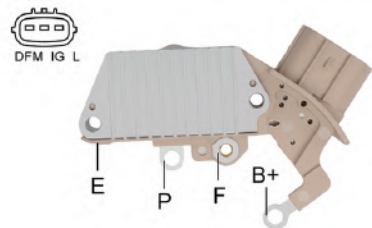

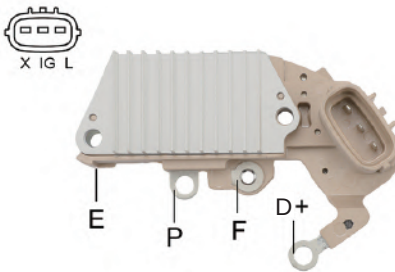

330-010/03-014 FEATURES B-Circuit Voltage Set Point 14.70 V Soft Start 32% Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function REFERENCES.. OEM NO 126600-0040 126600-0042 LESTER 13918 MOBILETRON VR-H2005-99 TRANSPO IN6004 	330-020/03-031 FEATURES B-Circuit Voltage Set Point 14.60V Soft Start 32% Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function REFERENCES.. OEM NO 126600-3350 122600-0140 LESTER 13980 20616 MOBILETRON VR-H2005-90 TRANSPO IN6335 CARGO 237650 	330-030/03-042 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. CARGO 237609 330412 333031 LESTER 11205 11238 11430 23839 MOBILETRON VR-H2005-88 TRANSPO IN6601 
330-040/03-062 FEATURES A-Circuit Voltage Set Point 14.50V L Terminal Drives Choke DFM Function REFERENCES.. FIT UNIT 104210-3170 104210-3240 104210-4240 104210-424 LESTER 11114 23229 MOBILETRON VR-H2005-83 TRANSPO IN317 	330-050/03-064 FEATURES B-Circuit Voltage Set Point 14.70V Soft Start 32% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 126600-3650 104210-591 LESTER 11392 MOBILETRON VR-H2005-149 TRANSPO IN6365 	330-060/03-065 FEATURES B-Circuit Voltage Set Point 14.60V Soft Start 32% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 104210-589 126600-3660 LESTER 11390 MOBILETRON VR-H2005-148 TRANSPO IN6366 CARGO 237650 
330-070/03-069 FEATURES B-Circuit Voltage Set Point 14.20V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Sense open indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 126600-0150 LESTER 11807 11090 13983 13994 MOBILETRON VR-H2005-91 TRANSPO IN6015 	330-080/03-073 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Sense open indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO 126600-0022 126600-0023 LESTER 13905 13927 13963 MOBILETRON VR-H2005-93 TRANSPO IN6002 	330-090/03-074 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 32% LRC 5 sec Field Lamp Shorted Circuit Protection Sense open indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 126600-3010 126600-3040 LESTER 11032 11033 11034 1108 MOBILETRON VR-H2005-85 TRANSPO IN6301 CARGO 236329 



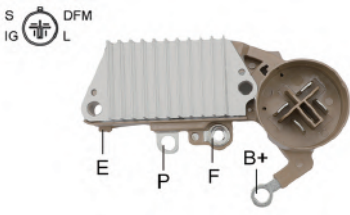



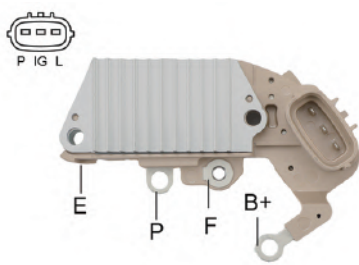

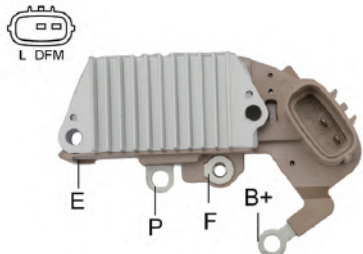
330-110/03-088 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO 8973697161 104210-9031 MOBILETRON VR-H2005-166 	330-120/03-089 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 32% LRC 5 sec Field Lamp Shorted Circuit Protection Sense open Indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 126600-0030 126600-0031 LESTER 11035 13919 MOBILETRON VR-H2005-94 TRANSPON IN6003 	330-130/03-090 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 32% LRC 5 sec Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 126600-0090 LESTER 11003 11036 MOBILETRON VR-H2005-104 TRANSPON IN6009 
330-140/03-091 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 32% LRC 5 sec Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 126600-3080 LESTER 11062 MOBILETRON VR-H2005-152 TRANSPON IN6308 	330-150/03-092 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 32% Field Lamp Shorted Circuit Protection Sense open indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 126600-3000 LESTER 11138 11139 11196 13984 MOBILETRON VR-H2005-146 TRANSPON IN6300 CARGO 235837 	330-160/03-097 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 31 % LRC 5 Sec Field Shorted Circuit Protection Sense open indication Under /Over Voltage Indication REFERENCES.. OEM NO 126600-0011 27700-50060 104210-3030 104210-3031 104210-3920 104210-3921 13979 13992 LESTER VR-H2005-89 MOBILETRON IN6001 TRANSPON 
330-330 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 20% LRC 2.5 sec Field Shorted Circuit Protection Self Exciting Function REFERENCES.. FIT UNIT 31400-57L00 DENSO NO 104210-1170 	330-340 FEATURES B-Circuit Voltage Set Point 13.70V Soft Start 25% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. LESTER 11782 20362 20363 20501 MOBILETRON VR-H2005-202 WAI/TRANSPON IN7630 FIT UNIT 5702H7 5705KC 	330-341 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 25 %,LRC 5 Sec Self Exciting Function LIN1.3 Class 00 LIN Regulator REFERENCES.. OEM NO 0847517207ZZ 






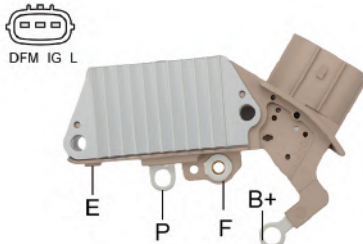
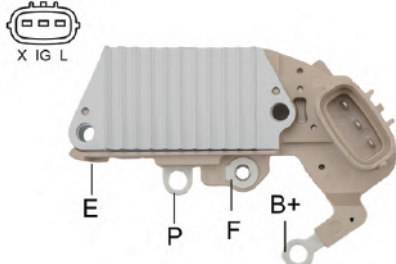
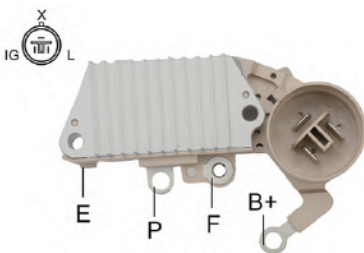
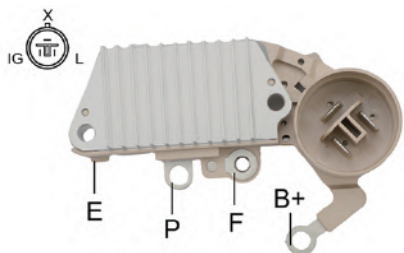
330-342 FEATURES B-Circuit Voltage set point 14.10V Soft start 20% LRC 5 Sec Field shorted circuit protection self exciting function LIN2 class 00 LIN Regulator REFERENCES.. OEM NO 104211-9361 LESTER 21520  	330-400 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. CARGO 114491 LESTER 11206 24028 MOBILETRON VR-H2005-142 TRANSPO IN6342 FIT UNIT 104210-3690 104210-3710  	330-460 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 31.25 % Field Shorted Circuit Protection Under / Over Voltage Indication DFM Function REFERENCES.. DENSO NO 126600-3220 126600-3320 LESTER 11201 11322 MOBILETRON VR-H2005-95 TRANSPO IN6302 FIT UNIT 104210-2090 104210-2320  
330-540 FEATURES A-Circuit Voltage Set Point 28.10V Soft Start 31% Sense Loss Indication Field Shorted Circuit Protection Under / Over Voltage Indication REFERENCES.. OEM NO 126000-3771 104210-1810  	330-570 FEATURES B-Circuit Voltage Set Point 14.80 V Soft Start 32% LRC 5 Sec Field Lamp Shorted Circuit Protection Under / Over Voltage Indication DFM Function REFERENCES..  	330-600 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5% Self Exciting Function LIN1.3 class03 LIN Regulator REFERENCES.. MOBILETRON VR-H2005-226 VOLTAG ARN9328 DENSO 104211-8380 VW UNIT 03L903024 03L903024X  
330-680 FEATURES A-Circuit Voltage Set Point 14.6V Soft Start 18% LRC 5 Sec Field Shorted Circuit Protection Under/Over Voltage Indiction REFERENCES.. OEM NO 104210-4050 LESTER 11093 MOBILETRON VR-H2005-176  	330-740 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 32% C Terminal Regulator Field Shorted Circuit Protection Under / Over voltage Indication REFERENCES.. OEM NO 104210-4660 LESTER 24020 MOBILETRON VR-H2005-159 TRANSPO IN6660  	330-780 FEATURES B-Circuit Voltage set Point 14.5V SoftStart 30% LRC 5 sec Field Short Circuit Protection Under/Over Voltage Indiction REFERENCES.. OEM NO A0910291  




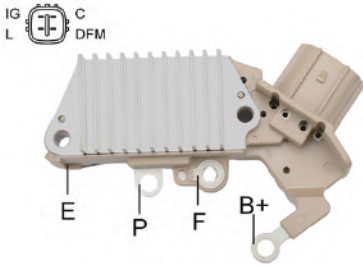



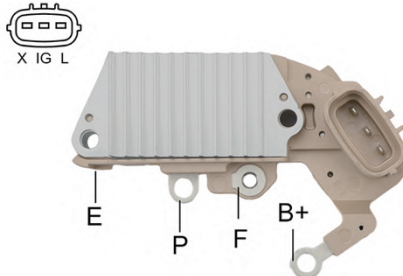

330-820 FEATURES B-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. MOBILETRON VR-H2005-150 LESTER 11569 24028 TRANPO IN6349 	336-081 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25% Self Exciting Function LIN Regulator ID 34 Class 4 REFERENCES.. DENSO NO IFX1 7740 126600-7740 7740 LESTER NO 20854 21535 DENSO UNIT 104210-6720 104210-6721 BMW UNIT 12 31 8 626 086 12-31-7-640-132 	336-550 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 %LRC 5 Sec Self Exciting Function ID:89 LIN Regulator REFERENCES.. DENSO NO GC104960 LESTER NO 21248 DENSO UNIT TN104211-0971 TOYOTA UNIT 27060-0P420 
331-040/03-099 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 sec SelfExcitingFunction LIN Regulator REFERENCES.. OEM NO 126600-7120 CARGO 331744 LESTER 11054 20424 MOBILETRON VR-H2005-171 	331-060 FEATURES B-Circuit Voltage Set Point 14.60V Soft Start 25% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self Exciting Function REFERENCES.. LESTER 11594 20503 24126 MOBILETRON VR-H2005-191 WAI/TRANPO IN3910 	331-070 FEATURES B-Circuit Voltage Set Point 14.60V Soft Start 25% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self Exciting Function 
331-170/03-084 FEATURES B-Circuit RVC=0Vset=13.80V RC=70%Vset=14.45V SoftStart18.75% LRC2.5sec LTerminalDrivesChoke DFMfunction RVCRegulator REFERENCES.. OEM NO GC33060 GC33240 GC33440 WAI IN6324 MOBILETRON VR-H2005-101 	331-180/03-085 FEATURES B-Circuit RVC=0Vset=13.80V RC=70%Vset=14.45V SoftStart18.75% LRC2.5sec LTerminalDrivesChoke DFMfunction RVCRegulator REFERENCES.. CARGO 333807 LESTER 11156 11183 11237 11250 11367 11647 11787 WAI NO IN6329 MOBILETRON VR-H2005-163 	332-010/03-001 FEATURES A-Circuit Voltage Set Point 14.50V DFM Function 63.5mm Mounting L Terminal Drives Choke REFERENCES.. OEM NO 126000-2090 126000-2620 LESTER 13103 13674 13677 MOBILETRON VR-H2005-40 TRANPO IN445 CARGO 234557 WAI 35-8241 NOTE NPR254 

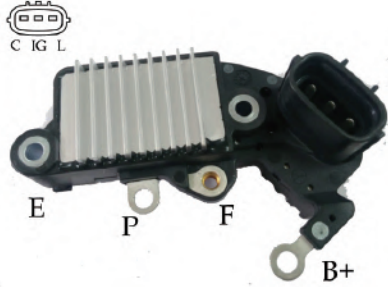

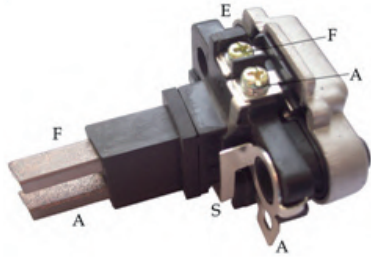
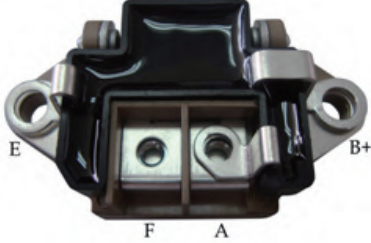

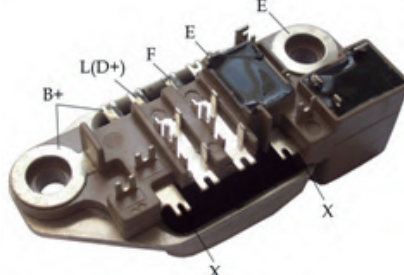
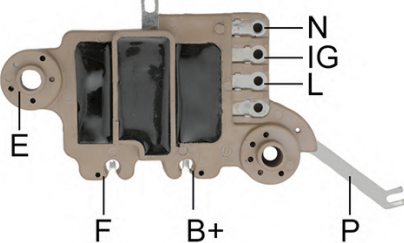
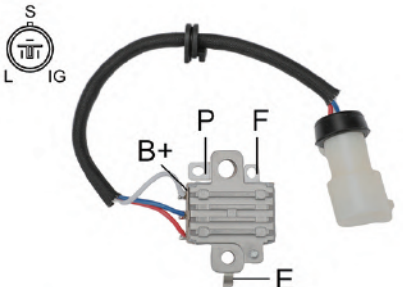
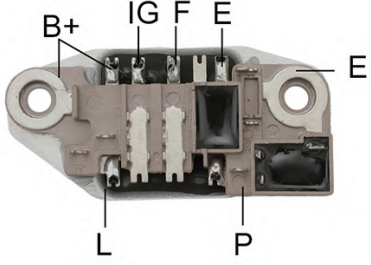
332-020/03-004 FEATURES A-Circuit Voltage Set Point 14.20V Soft Start 30% Field Shorted Circuit Protection Sense open Indication Under Voltage Indication Over Voltage Indication 57.5mm Mounting REFERENCES.. OEM NO 126000-3790 TRANSPO IN259 LESTER 12357 12849 MOBILETRON VR-H2005-50A  	332-030/03-005 FEATURES A-Circuit Voltage Set Point 14.50V Field Shorted Circuit Protection Over Voltage Indication 57.5mm Mounting REFERENCES.. OEM NO 126000-0760 126000-1160 LESTER 11559 MOBILETRON VR-H2005-39 TRANSPO IN254 CARGO 133872 139419 WAI 35-8221-1  	332-040/03-007 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG/Sense open Indication Active Lamp function-withoutput Under/Over Voltage Indication 57.5mm Mounting REFERENCES.. OEM NO 126000-0550 126000-0980 LESTER 13239 13390 13425 MOBILETRON VR-H2005-23A TRANSPO IN250 CARGO 132855 WAI 35-8217  
332-050/03-008 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG/SenseLoss Indication Under/Over Voltage Indication 57.5mm Mounting REFERENCES.. DENSO NO 126000-1960, 126000-2050 TOYOTA NO 27700-50020, 27700-50030 CQ NO CQ1010168 ERA NO 215684 UNIPOINT YR-6561  	332-070/03-011 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG/Sense open Indication Active Lamp function-withoutput Under/Over Voltage Indication 57.5mm Mounting REFERENCES.. OEM NO 126000-0550 126000-0980 LESTER 13239 13390 13425 MOBILETRON VR-H2005-23A TRANSPO IN250 CARGO 132855 WAI  	332-080/03-012 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG open Indication Under/Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-1200 8970320910 LESTER 13391 13423 13424 MOBILETRON VR-H2005-16A TRANSPO IN435 CARGO 134447 WAI 35-8226  
332-090/03-013 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG/Sense open Indication ActiveLamp function-withoutput Under/Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-0340 126000-0400 LESTER 12856 12857 13229 MOBILETRON VR-H2005-4A TRANSPO IN220 CARGO 131459 WAI 35-8204 35-8204-2  	332-100/03-016 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-1970 126000-1971 LESTER 11086 13679 13680 13753 MOBILETRON VR-H2005-48A TRANSPO IN452 CARGO 139268 WAI  	332-110/03-017 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Sense open Indication Under Voltage Indication Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-1580 126000-1640 LESTER 13457 13482 13492 13495 MOBILETRON VR-H2005-31A TRANSPO IN439 CARGO 135734 WAI 35-8238  







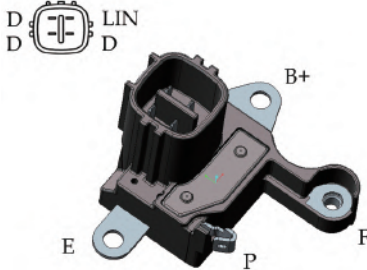


332-120/03-018 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Sense Open Indication Under/Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-1870 126000-2260 LESTER 13545 13547 13552 13558 MOBILETRON VR-H2005-63A TRANSPON IN441 CARGO 138894 WAI 35-8234 	332-130/03-019 FEATURES A-Circuit Voltage Set Point 14.50V L Terminal Drives Choke 57.5mm Mounting REFERENCES.. OEM NO 126000-0840 LESTER 14937 MOBILETRON VR-H2005-25 TRANSPON IN252 CARGO 138664 WAI 35-8218 	332-150/03-021 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30 % , LRC 5 sec Field Shorted Circuit Protection IG / Sense Open Indication Under / Over Voltage Indication 63.5mm Mounting REFERENCES.. DENSO NO 126000-1730, 126000-1750 TOYOTA NO 27700-11070, 27700-11080 CQ NO CQ1010455 ERA NO 215672, 215674 HUCO NO 132891 
332-160/03-025 FEATURES A-Circuit Voltage Set Point 14.50V 57.5mm Mounting REFERENCES.. OEM NO 126000-1800 LESTER 12202 12346 12352 12356 MOBILETRON VR-H2005-60 TRANSPON IN450 CARGO 138146 WAI 35-8246 	332-180/03-027 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG/Sense open Indication Under/Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-0610 126000-1440 LESTER 13234 13240 13252 13276 MOBILETRON VR-H2005-33A TRANSPON IN434 CARGO 135730 WAI 35-8225 	332-190/03-028 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30 % , LRC 5 sec Field Shorted Circuit Protection Under/ Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. DENSO 126000-3130 126000-3131 CARGO 234091 LESTER 11085 13857 13896 WAI/TRANSPON IN447 MOBILETRON VRH2005-65 
332-200/03-030 FEATURES A-Circuit Voltage Set Point 28.20V 63.5mm Mounting REFERENCES.. OEM NO 126000-7120 27700-58040 LESTER 138297 MOBILETRON VR-H2005-66 TRANSPON IN460 	332-210/03-032 FEATURES A-Circuit Voltage Set Point 28.50V 63.5mm Mounting REFERENCES.. WAI/TRANSPON 1IN460 	332-220/03-033 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. CARGO 132859 LESTER 11100 13506 13529 13538 23196 WAI 35-8232 MOBILETRON VR-H2005-10 TRANSPON IN431 

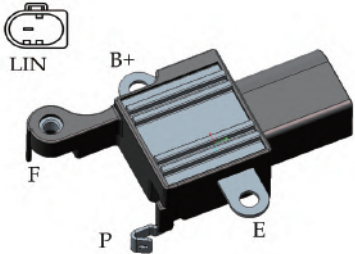


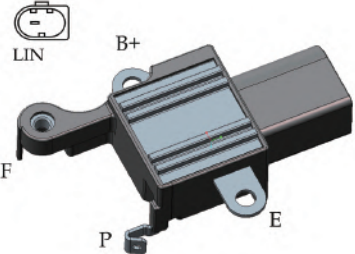





332-240/03-035 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG/Sense open Indication ActiveLamp function-withoutput Under/Over Voltage Indication LTerminal DrivesChoke DFM Function 63.5mm Mounting REFERENCES.. HONDA NO 31150-P5A-003 31150-P5A-0030 MOBILETRON VR-H2005-64A WAI/TRANSP IN455 CARGO NO 233517, 236768 	332-250/03-036 FEATURES A-Circuit Voltage Set Point 14.50V L Terminal Drives Choke DFM Function 63.5mm Mounting REFERENCES.. OEM NO 126000-0940 126000-1700 CARGO 132859 LESTER 13325 13395 13507 13508 WAI 35-8214 MOBILETRON VR-H2005-10 TRANSP IN224 	332-270/03-038 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG/Sense open Indication Under/Over Voltage Indication LTerminal DrivesChoke DFM Function 63.5mm Mounting REFERENCES.. OEM NO 126000-0540 126000-1170 LESTER 13386 13387 14680 MOBILETRON VR-H2005-9A TRANSP IN226 CARGO 132645 WAI 35-8213 
332-280/03-039 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG open Indication Active Lamp function-withoutput Under/Over Voltage Indication DFM Function 63.5mm Mounting REFERENCES.. OEM NO 126000-1470 126000-1471 LESTER 13433 MOBILETRON VR-H2005-19A TRANSP IN429 CARGO 232455 WAI 35-8231 	332-290/03-041 FEATURES A-Circuit Voltage Set Point 28.20V 57.5mm Mounting REFERENCES.. OEM NO 126000-2360 126000-7050 CARGO 235748 LESTER 12212 TRANSP IN705 	332-310/03-044 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG open Indication Under/Over Voltage Indication 57.5mm Mounting REFERENCES.. OEM NO 126000-0850 126000-0880 LESTER 12353 12652 12653 13316 MOBILETRON VR-H2005-24 TRANSP IN251 CARGO 132860 WAI 35-8216 
332-320/03-045 FEATURES A-Circuit Voltage Set Point 14.60V 63.5mm Mounting REFERENCES.. OEM NO 126000-1940 CARGO 138638 LESTER 11633 12192 12355 1471 TRANSP IN449 MOBILETRON VR-H2005-59 	332-330/03-046 FEATURES A-Circuit Voltage Set Point 28.20 V 63.5mm Mounting REFERENCES.. GM NO 94139012 MOBILETRON VR-H2005-5H WAI/TRANSP IN221 CARGO NO 134447 LESTER 12354 13391 13521 HONDA NO 31150-PE0-003 	332-350/03-048 FEATURES A-Circuit Voltage Set Point 14.70V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function 63.5mm Mounting REFERENCES.. MOBILETRON VR-H2005-92 WAI/TRANSP IN454 CARGO NO 235887 










332-360/03-051 FEATURES A-Circuit Voltage Set Point 28.50V Soft Start 30% Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 12600-2320 12600-2310 CARGO 333040 LESTER 12532 12775 TRANSPO IN462 	332-370/03-052 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG open Indication Under/Over Voltage Indication L Terminal Drives Choke DFM Function 63.5mm Mounting REFERENCES.. OEM NO 126000-3300 MOBILETRON VR-H2005-173 LESTER 11049 11164 TRANSPO IN330 	332-400/03-056 FEATURES A-Circuit Voltage Set Point 14.40V 63.5mm Mounting REFERENCES.. OEM NO 126000-0340 126000-0400 CARGO 131459 LESTER 12856 12857 13229 13240 WAI 35-8204 35-8204-2 MOBILETRON VR-H2005-4A TRANSPO IN220 
332-410/03-059 FEATURES A-Circuit Voltage Set Point 14.10V Soft Start 30% LRC 5 sec SenseLoss Indication Under Voltage Indication Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-7100 LESTER 13496 23710 MOBILETRON VR-H2005-35 TRANSPO IN440 CARGO 135734 WAI 35-8236 	332-420/03-066 FEATURES A-Circuit Voltage Set Point 14.50V Field Shorted Circuit Protection Over Voltage Indication L Terminal Drives Choke 57.5mm Mounting REFERENCES.. OEM NO 126000-0970 126000-0971 LESTER 12180 12182 MOBILETRON VR-H2005-15H TRANSPO IN255 CARGO 133519 WAI 35-8220 	332-430/03-068 FEATURES A-Circuit Voltage Set Point 14.55V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function 63.5mm Mounting REFERENCES.. OEM NO 126000-2871 CARGO 235449 MOBILETRON VR-H2005-82 
332-490/03-077 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection L Terminal Drives Choke Under Voltage Indication Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-2480 LESTER 13837 13875 TRANSPO IN248 	332-510/03-079 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-0430 LESTER 12354 13391 13521 14732 MOBILETRON VR-H2005-5H TRANSPO IN221 CARGO 134447 WAI 35-8205 	332-520/03-080 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication 57.5mm Mounting REFERENCES.. OEM NO 126000-0720 126000-0721 LESTER 13214 13255 13414 14684 MOBILETRON VR-H2005-26A TRANSPO IN253 WAI 35-8215-1 






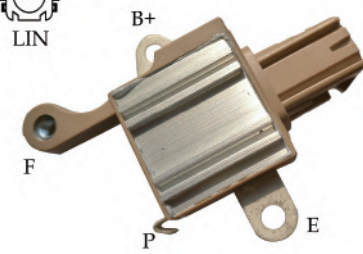



332-530/03-081 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication L Terminal Drives Choke DFM Function 63.5mm Mounting REFERENCES.. OEM NO 126000-3020 126000-0321 MOBILETRON VR-H2005-179 LESTER 23192 TRANSPO IN302 CARGO 237642 	332-540/03-082 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG/Sense open Indication Active Lamp function - with output Under/Over Voltage Indication L Terminal Drives Choke DFM Function 63.5mm Mounting REFERENCES.. CARGO 233517 236768 DENSO NO 126000-3390 126000-3690 LESTER 13372 11089 1152 23313 TOYOTA NO 27700-30070 27700-50040 	332-550/03-083 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-1760 MOBILETRON VR-H2005-34 LESTER 13519 13548 TRANSPO IN443 CARGO 136727 
332-590/03-094 FEATURES A-Circuit Voltage Set Point 14.00V Soft Start 30% LRC 5 sec Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function 63.5mm Mounting REFERENCES.. MOBILETRON VR-H2005-197 WAI/TRANSPO IN337 	332-620/03-096 FEATURES B-Circuit Voltage Set Point 14.15V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM Function 63.5mm Mounting REFERENCES.. OEM NO 126600-0520 126600-0540 MOBILETRON VR-H2005-100 LESTER 11194 TRANSPO IN3054 	332-640/03-100 FEATURES B-Circuit Voltage Set Point 14.05V Soft Start 32% LRC 5 sec Field Lamp Shorted Circuit Protection Sense open indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 126600-3230 MOBILETRON VR-H2005-146 LESTER 11136 11137 TRANSPO IN6323 
332-650/03-101 FEATURES A-Circuit Voltage Set Point 28.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-2340 126000-7010 MOBILETRON VR-H2005-58 LESTER 220182 20186 TRANSPO IN461 	332-660/03-102 FEATURES A-Circuit Voltage Set Point 28.30V Soft Start 30% Under/Over Voltage Indication 63.5mm Mounting REFERENCES.. OEM NO 126000-3730 MOBILETRON VR-H2005-151B LESTER 11837 13144 TRANSPO IN373 FIT UNIT 102211-2820 102211-9060 	333-210 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. DENSO NO 126000-2520 LESTER 12344 12349 12467 12468 TRANSPO 12860 IN9252 





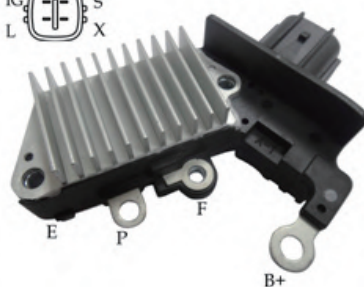
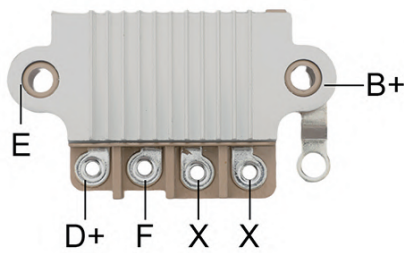
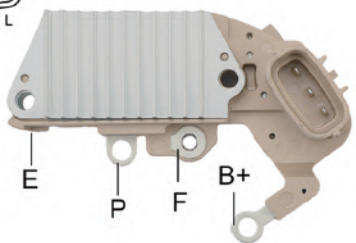


333-270 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 18 % LRC 5 Sec Field Short Circuit Protection Under / Over Voltage Indication REFERENCES.. OEM NO 1D019-600 GA3-9U7-0550 	334-030/03-015 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO 126000-0200 126000-0260 131527 CARGO 12062 LESTER 35-8223 WAI VR-H2005-12 MOBILETRON IN217 TRANSPO 	334-040/03-029 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 126000-0180 126000-0520 131460 CARGO 12003 12004 12018 12082 LESTER 35-8203 WAI VR-H2005-11 MOBILETRON IN218 TRANSPO 
334-050/03-060 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO 12000-0380 231060 CARGO 12059 12060 LESTER IN233 TRANSPO 	335-010/03-009 FEATURES A-Circuit Voltage Set Point 14.30V REFERENCES.. OEM NO 126000-0920 126000-1421 133526 231197 CARGO 12214 12215 20513 22320 LESTER 35-8245 WAI VR-H2005-2 MOBILETRON IN920 TRANSPO 	335-030/03-023 FEATURES A-Circuit Voltage Set Point 28.70 V REFERENCES.. UNIPOINT IVR-254 
335-040/03-024 FEATURES A-Circuit Voltage Set Point 28.80V REFERENCES.. OEM NO 277000-1810 23500-99109 CARGO 233493 MOBILETRON VR-H2005-102B 	335-060/03-053 FEATURES A-Circuit Voltage Set Point 14.30V REFERENCES.. OEM NO 126000-0920 126000-0921 234644 CARGO 12214 12215 20513 22320 LESTER VR-H2005-2W MOBILETRON IN921 TRANSPO 	335-080/03-061 FEATURES A-Circuit Voltage Set Point 28.60V Lamp Shorted Circuit Protection L Terminal Does Not Drive Choke REFERENCES.. OEM NO 277000-1700 126000-3270 CARGO 136168 MOBILETRON VR-H2002-1 TRANSPO IW700 

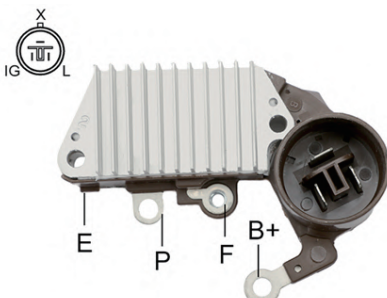







335-100/03-0091 FEATURES A-Circuit Voltage Set Point 14.30V REFERENCES.. OEM NO 126000-0920 126000-1421 CARGO 133526 231197 LESTER 12214 12215 20513 22320 WAI 35-8245 MOBILETRON VR-H2005-2 TRANSP0 IN920 	335-130 FEATURES A-Circuit Voltage Set Point 28.50V Sense Open Indication REFERENCES.. OEM NO 126000-2330 126000-7000 	335-170 FEATURES A-Circuit Voltage Set Point 28.10 V REFERENCES.. OEM NO 126000-2330 126000-7000 
335-190 FEATURES A-circuit Voltage Set Point 28.80V Add the plug at 03-024 REFERENCES.. CARGO 233493 LESTER 12845 MOBILETRON VR-H2005-102B VOLTAG ARW9493 	336-010 FEATURES B-Circuit Voltage Set Point 14.40V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. HONDA NO 31108R9PA01 LESTER 11670 11671 11672 11773 MOBILETRON VR-H2005-203 WAI/TRANSP0 IN4180 	336-020 FEATURES B-Circuit Voltage Set Point 14.40V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. HONDA NO 31108R1PH01 LESTER 11604 11768 20971 MOBILETRON VR-H2005-190 WAI/TRANSP0 IN6363 
336-030 FEATURES B-Circuit Voltage Set Point 14.40V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. UTM NO RN0300A LESTER 20133 VOLTAG ARN1208 WAI/TRANSP0 IN6320 MOBILETRON VR-H2005-193 	336-040 FEATURES B-Circuit Voltage Set Point 14.00V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. TOYOTA 27360-0N060 LESTER 14487 VOLTAG ARN9911 WAI/TRANSP0 IN6373 MOBILETRON VR-H2005-178 	336-050 FEATURES B-Circuit Voltage Set Point 13.70V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. OEM NO GC8 4110 TRANSP0 IN6370 MOBILETRON VR-H2005-209 






336-060 FEATURES B-Circuit Voltage Set Point 13.70V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. OEM NO GC8 4460 	336-070 FEATURES B-Circuit Voltage Set Point 13.70V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. OEM NO 104210-5061 GC6 3570 	336-080 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. KRAUF ARN7127UT UTM NO RN7127A ZAUFER 310N10455Z LESTER 14204 MOBILETRON VR-H2005-206 WAI/TRANPO IN7521 
336-090 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. OEM NO IFX1 7511 	336-100 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% Self Exciting Function LIN Regulator REFERENCES.. OEM NO IFX1 7541 IFX1 7591 	336-110 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20 % LRC 3 Sec Self Exciting Function BSS_3 ID=67 BSS Regulator REFERENCES.. FIT UNIT 742109R03 104210-6030 LESTER 11366 
336-120 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20 % LRC 3 Sec Self Exciting Function BSS_3 ID=70 BSS Regulator REFERENCES.. DENSO NO 126600-7310, 126600-7420 DENSO UNIT 104210-6020, 104210-6022 LESTER 11791 PSH NO 052.000.742.056 AS NO ARE6116 MOBILETRON VR-H2005-184 WAI/TRANPO IN6325 	336-130 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20 % LRC 3 Sec Self Exciting Function BSS_3 ID=70 BSS Regulator REFERENCES.. FIT UNITS 73905M12 104210-6240 LESTER 11752 MOBILETRON VR-H2005-183 TRANPO IN6367 	336-150 FEATURES B-Circuit Voltage Set Point 13.70V Soft Start 12.5 % LRC 5 Sec Self Exciting Function LIN2 Class01 LIN Regulator REFERENCES.. FIT UNIT IFX786012S14 FX786008R04 









336-160 FEATURES B-Circuit Voltage Set Point 14.40 V Soft Start 12.5 % Self Exciting Function LIN2.1 class30 LIN Regulator REFERENCES.. FIT UNIT 104211-2210  X LIN 	336-170 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 12.5 % Self Exciting Function LIN2 class17 LIN Regulator REFERENCES.. FIT UNIT 104210-9532  LIN 	336-190 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class30 LIN Regulator REFERENCES.. FIT UNIT 104210-6680 104210-6681 LESTER 20834 MOBILETRON VR-H2005-218  LIN 
336-200 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 12.5% Self Exciting Function LIN1 class16 LIN Regulator REFERENCES.. OEM NO 0194313086  LIN 	336-210 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 12.5% Self Exciting Function LIN1 Class19 LIN Regulator REFERENCES.. UTM NO RN2420B ZAUFER 310N10443Z DENSO NO 126600-4220, GC8 4220, 104211-1180 LESTER NO 20276, 20276 VOLTAG NO ARN8540 DENSO UNIT 104210-6990, 104210-6991  LIN 	336-220 FEATURES B-Circuit Voltage Set Point 14.40 V Soft Start 12.5% Self Exciting Function LIN2.1 class30 LIN Regulator REFERENCES.. FIT UNIT 104210-6520 104210-6521 LESTER 11753  LIN 
336-230 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5% Self Exciting Function LIN1.3 class04 LIN Regulator REFERENCES.. FIT UNIT 104211-0640 LESTER 24101  LIN 	336-240 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 12.5% Self Exciting Function LIN1.3 class 16 LIN Regulator REFERENCES.. OEM NO 104210-6620/6621/6622/6623 LESTER 11769  LIN 	336-250 FEATURES B-Circuit Voltage Set Point 14.40 V Soft Start 12.5 % Self Exciting Function LIN1.3 class14 LIN Regulator REFERENCES.. OEM NO GC8 4570  LIN 

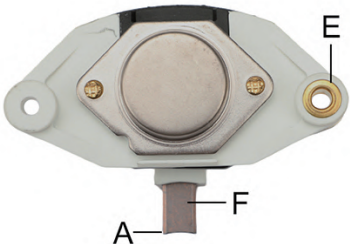
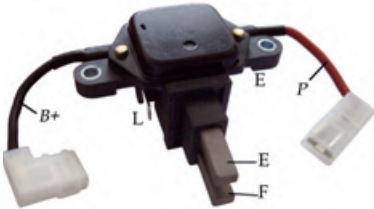

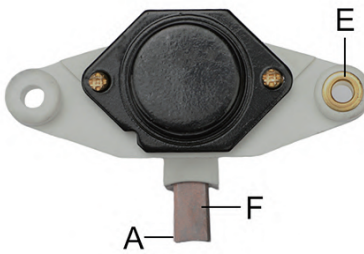
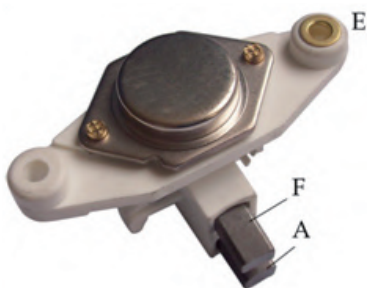

336-260 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20 % Self Exciting Function BSS_3 ID=67 BSS Regulator REFERENCES.. OEM NO 216337 NIPPONDENSO 104210-6021 LESTER 11511, 20136 PSH NO 052.000.742.050 BMW UNIT 12-31-7-550-468-01 	336-270 FEATURES B-Circuit Voltage Set Point 13.70V Soft Star 25% LRC 3 Sec Self Exciting Function LIN1.3 class03 LIN Regulator REFERENCES.. OEM NO 126600-3300 MOBILETRON VR-H2005-189 TRANPO IN3300 	336-290 FEATURES B-Circuit Voltage Set Point 13.70V Soft Star 12.5% LRC 5 Sec Self Exciting Function LIN1.3 class01 LIN Regulator REFERENCES.. TOYOTA 273600-T320 NIPPONDENSO 7860 7860-05S29 MOBILETRON VR-H2005-156 VOLTAC ARN5156 
336-300 FEATURES B-Circuit Voltage Set point 13.70 V Soft Start 12.5% LRC 5Sec Field Shorted Circuit Protection Self Exciting Function LIN 1.3 class03 LIN Regulator REFERENCES.. OEM NO 27060-0V390 104211-9020 	336-310 FEATURES B-Circuit Voltage Set point 14.30 V Soft Start 12.5% LRC 3Sec Field Shorted Circuit Protection Self Exciting Function LIN 1.3 class02 LIN Regulator REFERENCES.. OEM NO IXF1 7730 MOBILETRON VR-H2005-237 TRANPO IN7730 	336-350 FEATURES B-Circuit Voltage Set Point 14.00V Soft Start 12% Self Exciting Function LIN 1.3 class 3 LIN Regulator REFERENCES.. OEM NO 104211-8111 104211-8112 
336-430 FEATURES B-Circuit Voltage Set Point 14.40 V Soft Start 12.5% Self Exciting Function LIN2.1 class30 LIN Regulator REFERENCES.. OEM NO 104210-6982 	336-440 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5% Self Exciting Function LIN1.3 Class06 LIN Regulator REFERENCES.. FIT UNIT 9678178280 LESTER 20835 MOBILETRON VR-H2005-221 	336-460 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 25% LRC 3 Sec Self Exciting Function LIN1.3 Class 01 LIN Regulator REFERENCES.. OEM NO 27060-0Y350 MOBILETRON VR-H2005-224 




336-490 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 25% LRC 5 Sec Self Exciting Function LIN1.3 Class 09 LIN Regulator REFERENCES.. FIT UNIT 104211-4081  	337-010 FEATURES B-Circuit Voltage Set Point 14.10 V LRC 5Sec DFM Function REFERENCES.. DENSO 126600-4490 MOBILETRON VR-H2005-107 TRANSPON IN6402  	332-C10/03-040 FEATURES A-Circuit Voltage Set Point 14.50V 6 3.5mm Mounting REFERENCES.. OEM NO 126000-2150 126000-2151 CARGO 234731 MOBILETRON VR-H2005-77 TRANSPON IN215  
332-C20/03-058 FEATURES A-Circuit Voltage Set Point 14.55V Soft Start 30% LRC 5 sec Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function 63.5mm Mounting REFERENCES.. OEM NO 126000-3040 MOBILETRON VR-H2005-62A TRANSPON IN304  	332-CQ0 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication 57.5mm Mounting REFERENCES.. OEM NO 126000-2700  	332-DH0 FEATURES A-Circuit Voltage Set Point 28.00V REFERENCES.. LESTER 12350 12464 12670 12770 TRANSPON 12774 12859 14793 IN9254 DENSO NO 126000-2540 
332-DK0 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. ISUZU NO 8971227960 NIPPONDENSO 126000-3361 CARGO 234731 LESTER 13739 23270 MOBILETRON VR-H2005-77 WAI/TRANSPON IN215  	332-DM0 FEATURES A-Circuit Voltage Set Point 14.50V DFM Function REFERENCES.. DENSO 126000-3800  	332-DP0 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 Sec C Terminal Regulator Field Shorted Circuit Protection Under / Over Voltage Indication 63.5mm Mounting REFERENCES.. ISUZU NO 8971227960 WAI/TRANSPON IN215 MOBILETRON VR-H2005-77 CARGO 234731 FIT UNIT 8-97109-780-1 2901237800  


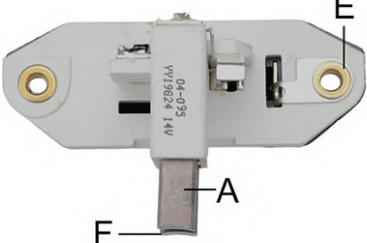

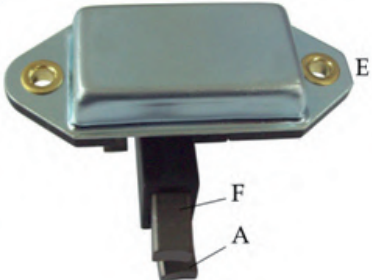
332-DT0 FEATURES A-Circuit Voltage Set Point 28.50 V Soft Start 31.25 % Under Voltage Indication Over Voltage Indication 57.5mm Mounting REFERENCES.. OEM NO 100211-4780 FIT UNIT 101211-1170 LESTER 12356 	332-DZ0 FEATURES A-Circuit Voltage Set Point 28.50 V Soft Start 21.4 % LRC 5 sec Under / Over Voltage Indication L Terminal Drives Choke 63.5mm Mounting REFERENCES.. FIT UNIT 126000-4060 	332-E40 FEATURES A-Circuit Voltage Set Point 28.20V 57.5mm Mounting REFERENCES.. LESTER 11748 12201 12210 PSH 052.001.144.050 052.001.144.056 AS ARE6151S DIXIE 3546-4021 NIPPONDENSO 126000-0750 
332-E50 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 18% Field Shorted Circuit Protection Under / Over Voltage Indication 63.5mm Mounting REFERENCES.. UTM NO RQ9500A ZAUFER 310N10976Z VOLTAG ARQ9500 	332-E60 FEATURES A-Circuit Voltage Set Point 28.20 V Soft Start 18% LRC 5 sec Sense Open Indication Under / Over Voltage Indication 63.5mm Mounting REFERENCES.. UTM NO RN9290A ZAUFER 310N10745Z PSH 052.001.336.056 VOLTAG ARN9290 HINO 27060-78210 	332-E70 FEATURES A-Circuit Voltage Set Point 28.50V 57.5mm Mounting REFERENCES.. OEM NO 126000-1800 101211-2310 CARGO 138146 MOBILETRON VR-H2005-60 TRANSPO IN450 
332-E90 FEATURES A-Circuit Voltage Set Point 14.5 V Field Shorted Circuit Protection Over Voltage Indication 57.5mm Mounting REFERENCES.. VALEO 436498 CARGO 133519 LESTER 11632 11903 12081 12180 MOBILETRON VR-H2005-15H FIT UNIT 27060-87221-000 3049491 	332-EA0 FEATURES A-Circuit Voltage Set Point 14.5 V Soft Start 18 % LRC 5 sec Field Shorted Circuit Protection Under / Over Voltage Indication DFM Function 63.5mm Mounting REFERENCES.. UTM NO RN6544A CARGO 235449 LESTER 23070 MOBILETRON VR-H2005-82 VOLTAG ARN6544 	332-EJ0 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG/Sense Open Indication Under / Over Voltage Indication 63.5mm Mounting REFERENCES.. TOYOTA NO 270600-8010 LESTER 21412 






332-EP0 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke DFM Function 63.5mm Mounting REFERENCES.. UTM NO RN0062A NIPPONDENSO 1260002931 MOBILETRON VR-H2005-187 	332-ES0 FEATURES A-Circuit Voltage Set Point 28.50 V Soft Start 18% Field Lamp Shorted Circuit Protection Under / Over Voltage Indication 63.5mm Mounting REFERENCES.. UTM NO RN0062A NIPPONDENSO 1260002931 MOBILETRON VR-H2005-187 VOLTAG ARN0062 HONDA 31100-PFC-003 	332-F20 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 31.25 % LRC 5 Sec Under / Over Voltage Indication DFM Function Self Exciting Function RLO Regulator REFERENCES.. OEM NO 126600-0050 TOYOTA 2770023040 
332-F70 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 Sec Field Shorted Circuit Protection IG Open Indication Active lamp function - with output Under/ Over Voltage Indication L Terminal Drives Choke DFM Function 63.5mm Mounting REFERENCES.. FIT UNIT 102211-6100 	332-F90 FEATURES A-Circuit Voltage Set Point 14.60 V Soft Start 30 % LRC 5 sec Field Lamp Shorted Circuit Protection Under/Over Voltage Indication DFM function REFERENCES.. OEM NO DE-1209A 	330-810 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 25 %,LRC 3 Sec Self Exciting Function ID 132 Class 16 LIN Regulator REFERENCES.. MOBILETRON VR-H2005-202 WAI/TRANPO IN7630 DENSO NO 126600-7630 0122112212AA 
330-170 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. MOBILETRON VR-H2005-96 CARGO 330843 333035 WAI/TRANPO IN6343 LESTER 11204 11290 11291 	336-640 FEATURES B-Circuit Voltage Set Point 13.7V Soft Start 12.5%,LRC 3sec Self Exciting Function LIN regulator LIN1.3 Class3 REFERENCES.. OEM 104211-9060 	



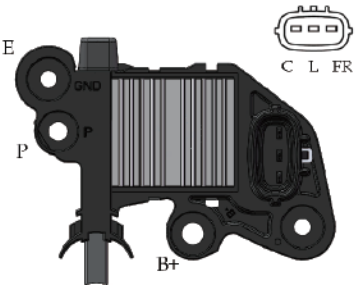

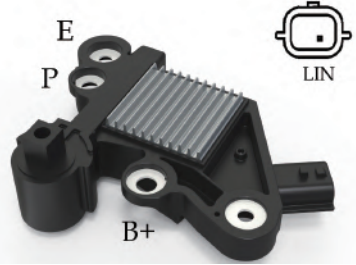



340-010/04-001 FEATURES A-Circuit (Metal Can) Voltage Set Point 28.10V Slip Ring OD: 28mm REFERENCES.. BOSCH NO 0 192 053 011 1 197 311 300 FORD NO 82DB-10316-AA FORD UNIT 1596677 1612497 6143717 DUCELLIER NO 592979 FIAT NO 8198422 IHC NO 3079392R91 IVECO NO 21546106 	340-020/04-002 FEATURES A-Circuit (Metal Can) Voltage Set Point 28.50V Field Shorted Circuit Protection REFERENCES.. UTM NO RP9402A ZAUFER 310N10159Z PRESTOLIT JFB2715000UP JFB271-5000-UP VOLTAG ARP9402 	340-050/04-006 FEATURES A-Circuit (Metal Can) Voltage Set Point 28.50V Slip Ring OD:28mm REFERENCES.. BOSCH 1197311315 0192053003 CARGO 131340 LESTER 12376 12592 12593 12606 TRANSPO IB381 IB382 MOBILETRON VR-B206 
340-070/04-008 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.60V With 180 Ohm Resistor Slip Ring OD: 14mm REFERENCES.. BOSCH 1197311211 1197311213 CARGO 134761 230259 LESTER 12383 12676 12677 13356 TRANSPO IB387 MOBILETRON VR-B201 WAI 35-9109 FIT UNIT 0120465003 	340-090/04-010 FEATURES A-Circuit (Metal Can) Voltage Set Point 28.10 V REFERENCES.. KAMAZ NO 45023771060 LADA NO 612370206 UTM NO RR9010A ZAUFER 310N10230Z VOLTAG ARR9010 	340-140/04-031 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.50V Slip Ring OD: 14mm REFERENCES.. BOSCH 1197311212 1197311214 CARGO 134687 LESTER 11135 12494 12675 13357 TRANSPO IB385 MOBILETRON VR-B200H WAI 35-9108 
340-150/04-032 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.5 V REFERENCES.. LADA NO 2413772 611370201 IKA NO 1.6089.1 UTM NO RR9032A RR9032B ZAUFER 310N10020Z AS ARE9087 VOLTAG ARR9032 	340-230/04-054 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.60V Without 180 Ohm Resistor Slip Ring OD: 14mm REFERENCES.. BOSCH 1197311500 1197311523 CARGO 137117 LESTER 13622 21224 21390 21391 TRANSPO IB388 MOBILETRON VR-B222 	340-240/04-055 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.60 V Slip Ring OD: 32mm REFERENCES.. BOSCH NO 1 197 311 032 1 197 311 033 BOSCH UNIT 0 120 484 001 0 120 484 002 CARGO 231758 MOBILETRON VR-B260 WAI/TRANSPO IB368 


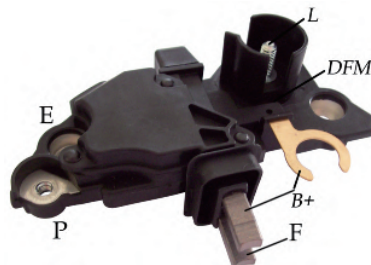





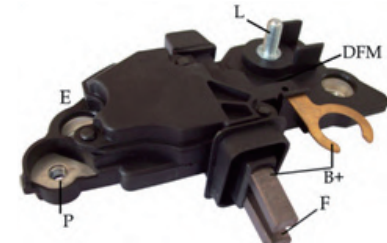
340-250/04-056 FEATURES A-Circuit (Metal Can) Voltage Set Point 28.10V Slip Ring OD:32mm REFERENCES.. BOSCH 1197311310 1197311313 LESTER 12148 12219 12295 12587 TRANSPO IB369 MOBILETRON VR-B260B 	340-260/04-057 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Lamp Choke Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. KZATE NO TRT3-01 LADA NO 79313702 7931370201 UTM NO RR9057A ZAUFER 310N10150Z VOLTAG ARR9057 	340-270/04-058 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 18% LRC 10 sec Field Lamp Choke Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. LADA NO 79303702 8493702 ORBITA NO 8973702 UTM NO RR9058A VOLTAG ARR9058 
340-280/04-063 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.60V With 180 Ohm Resister Slip Ring OD: 14mm REFERENCES.. BOSCH 1197311529 LESTER 22580 TRANSPO IB529 CARGO 137117 FIT UNIT CA1089IR 	340-320/04-067 FEATURES A-Circuit (Helmet Steel) Voltage Set Point 14.60V Low Cut-in Speed Slip Ring OD: 32mm REFERENCES.. OEM NO 11-125-165 16-906-48 MOBILETRON VR-IK01 TRANSPO IK402 CARGO 231044 	340-360/04-080 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.50V Slip Ring OD: 32mm REFERENCES.. BOSCH 1197311000 1197311001 LESTER 12029 12030 12146 12216 TRANSPO IB350 CARGO 133095 FIT UNIT CA3451R MOBILETRON VR-B193M 
340-380/04-084 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.50V Slip Ring OD: 28mm REFERENCES.. BOSCH 1192052015 1192052016 LESTER 12048 12150 12699 13055 TRANSPO IB352 WAI 35-9104 MOBILETRON VR-B195M 	340-420/04-096 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.60 V REFERENCES.. LETRIKA NO VR-B195M VALEO 437819 CARGO 231045 234935 236702 LESTER 11106 11107 12427 12547 MOBILETRON VR-IK02 TRANSPO IK403 	340-440/04-109 FEATURES A-Circuit (Metal Can) Voltage Set Point 28.50V REFERENCES.. OEM NO 11125209 





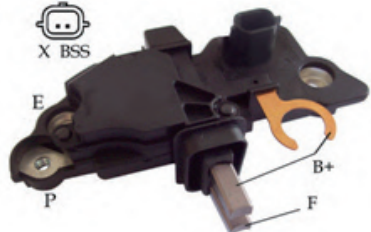
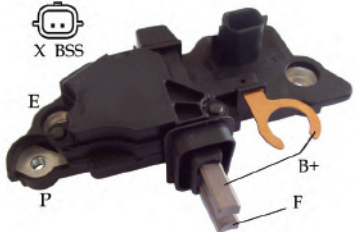

340-450/04-130 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. UNIPOINT YR-L040 UTM NO RR4130A PSH 052.000.915.200 VOLTAG ARR4130 	340-480/04-152 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. UTM NO RR0152A ZAUFER 310N10605Z VOLTAG ARR0152 	341-060/04-034 FEATURES A-Circuit (Helmet Steel) Voltage Set Point 14.50V Slip Ring OD: 32mm REFERENCES.. LESTER 12029 12030 12146 12216 BOSCH 0 192 052 003 0 192 052 018 AUDI NO 049-903-803B 049-903-803E MOBILETRON VR-B193M CARGO 130676 333253 TRANSP IB348 
341-090/04-061 FEATURES A-Circuit (Helmet Steel) Voltage Set Point 14.60V REFERENCES.. BOSCH 1197311211 1197311213 LESTER 12383 12676 12677 13356 TRANSP IB387 CARGO 134761 230259 WAI 35-9109 MOBILETRON VR-B201 	341-100/04-062 FEATURES A-Circuit (Helmet Steel) Voltage Set Point 14.50V REFERENCES.. BOSCH 1197311212 1197311214 LESTER 11135 12494 12675 13357 TRANSP IB385 CARGO 134687 WAI 35-9108 MOBILETRON VR-B200H 	341-110/04-072 FEATURES A-Circuit (Helmet Steel) Voltage Set Point 14.60V Low Cut-in Speed Slip Ring OD: 28mm REFERENCES.. BOSCH NO 0 192 052 033, 0 192 053 032 CARGO 132666, 132979 LESTER NO 12131, 12160, 12162, 12220 MOBILETRON VR-B202 WAI NO IB360 AS NO ARE0021 
341-130/04-083 FEATURES A-Circuit (Helmet Steel) Voltage Set Point 14.40V REFERENCES.. BOSCH 9190087003 9120803033 LESTER 13080 TRANSP IB359 WAI 35-9127 MOBILETRON VR-B211 	341-140/04-0851 FEATURES A-Circuit (Helmet Steel) Voltage Set Point 14.40V REFERENCES.. BOSCH 9121808303 9121080303 LESTER 13080 20093 TRANSP IB003 	341-160/04-087 FEATURES A-Circuit Voltage Set Point 14.40V Slip Ring OD: 32mm REFERENCES.. BOSCH 0192052001 0192052002 LESTER 12029 12685 13018 13054 TRANSP IB358 MOBILETRON VR-B192 










341-170/04-088 FEATURES A-Circuit Voltage Set Point 14.40V Slip Ring OD: 28mm REFERENCES.. BOSCH 9190087032 190087026 MOBILETRON VR-B103 	341-180/04-095 FEATURES A-Circuit Voltage Set Point 28.10V REFERENCES.. BOSCH 9190087018 0192053006 LESTER 12134 12135 12148 12294 TRANSPON IB374 MOBILETRON VR-B198 	341-200/04-099 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. BOSCH 9 190 457 002 CARGO 131297 LESTER 12221 12222 12371 MOBILETRON VR-B218 TRANSPON IB400 
341-220/04-103 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. BOSCH 9190041002 LESTER 13335 TRANSPON IB501 MOBILETRON VR-B250 	341-230/04-110 FEATURES A-Circuit (Helmet Steel) Voltage Set Point 28.75V Slip Ring OD: 28mm REFERENCES.. BOSCH NO 1 197 311 304 FIAT NO 93158421 RENAULT NO 5001831960 SCANIA NO 117253 362645 VOLVO NO 1606935 1625880 DAF NO 1676162 MAN NO 81256016035 	341-240/04-112 FEATURES A-Circuit Voltage Set Point 14.30V REFERENCES.. BOSCH 9190087039 9190087040 MOBILETRON VR-B217H 
341-260/04-124 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. BOSCH 9191067043 9191067049 LESTER 13459 13689 TRANSPON IB343 MOBILETRON VR-B393 CARGO 231237 	341-280/04-136 FEATURES A-Circuit (Helmet Steel) Voltage Set Point 14.10V REFERENCES.. LADA NO 2105370150010 713702 UTM NO RR4136A VOLTAG ARR4136 	341-310/04-148 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. BOSCH VG1560090011/5 






341-320/04-149 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication REFERENCES.. BOSCH 9190067018 LESTER 12223 12224 12333 12334 TRANSPO IB392 MOBILETRON VR-B392 WAI 35-9115 	341-330/04-154 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. FIT UNITS LA1139 	341-340/04-157 FEATURES A-Circuit Voltage Set Point 14.40V Slip Ring OD: 28mm REFERENCES.. BOSCH NO 1 192 052 015, 1 192 052 016 BOSCH UNIT 0 120 339 547, 0 120 468 001 AS NO ARE0002 MOBILETRON VR-B195M WAI/TRANSPO IB352 
341-350/04-158 FEATURES A-Circuit Voltage Set Point 28.50V Slip Ring OD: 28mm REFERENCES.. BOSCH 9190087018 9190087014 LESTER 12134 12135 12148 12294 TRANSPO IB374 MOBILETRON VR-B198 	341-360/10-001 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 134291 0134541 CARGO 133417 LESTER 12130 12140 12366 12554 TRANSPO MP291 MOBILETRON VR-M9134 	341-370/10-003 FEATURES A-Circuit Voltage Set Point 14.40V REFERENCES.. CARGO 233731 UTM NO RG8731A VOLTAG ARG8731 AS NO ARE9029 
341-720/04-092 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. CARGO 234480 MAGNETON 0138841 	341-750 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 11125122 11125149 LESTER 12281 14605 TRANSPO IK543 MOBILETRON VR-IK149 	341-760 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. LETRIKA AAK 3891 



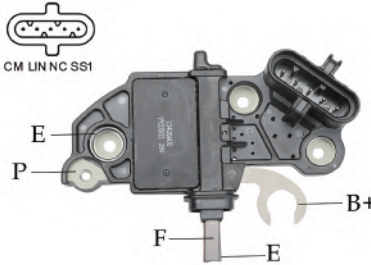



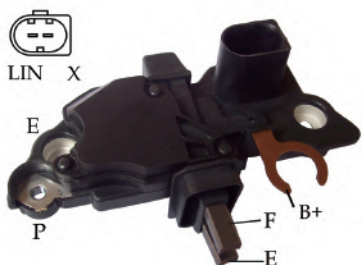


342-012 FEATURES B-Circuit Voltage Set Point 28.40V Soft Start 12.5 % Field Short Circuit Protection IG/Sense Open Indication Active Lamp Function-with Output REFERENCES.. BOSCH F00MA45248 CARGO 231523 235705 LESTER 12589 20126 20127 MOBILETRON VR-B118B 	342-030/04-014 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M145371 F00M145283 LESTER 23106 TRANSPO IB283 MOBILETRON VR-B371 CARGO 231716 	344-BU0 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 30 % LRC 5 sec C Terminal Regulator Field Shorted Circuit Protection Self Exciting Function REFERENCES.. OEM NO 0272220739 
342-050/04-020 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M145235 LESTER 23084 TRANSPO IB235 IB255 MOBILETRON VR-B253 CARGO 233508 FIT UNIT CA1636IR 	344-C50 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25% LRC 5 Sec Self Exciting Function LIN2.1 Class 03 LIN Regulator REFERENCES.. BOSCH F 000 BL0 4L6 F 000 BL0 4L7 MOBILETRON VR-B882 VOLTAG ARB1141 PSH 052.000.855.210 	342-070/04-0221 FEATURES B-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function Self Exciting Function REFERENCES.. BOSCH F00M144136 F00M144154 LESTER 11041 11042 11064 11065 TRANSPO IB5225 MOBILETRON VR-B254 CARGO 139925 FIT UNIT CA1378IR 
342-080/04-024 FEATURES B-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M145201 F00M145231 LESTER 13943 21404 21464 21515 TRANSPO IB231 MOBILETRON VR-B252 CARGO 139044 	342-090/04-026 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M145229 F00M145208 LESTER 13802 13997 TRANSPO IB229 MOBILETRON VR-B221 VR-B369 CARGO 232927 	342-100/04-028 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke REFERENCES.. BOSCH F00M225201 F00M225401 LESTER 13975 22952 TRANSPO IB201 MOBILETRON VR-B257 CARGO 235528 



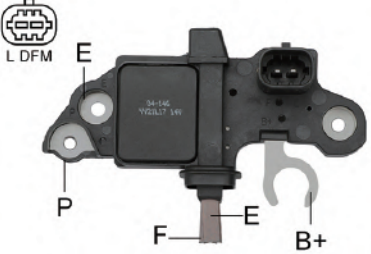


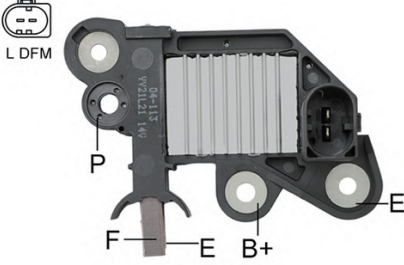



342-110/04-035 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. BOSCH F00M255200 F00M255201 LESTER 11074 13815 TRANSPO IB200 MOBILETRON VR-B394 CARGO 235460 	342-120/04-042 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. BOSCH F 00M 145 220 F 00M 145 349 CARGO 230249 333261 MOBILETRON VR-B256 TRANSPO IB220 	342-140/04-045 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. BOSCH F00M145251 F00M145245 LESTER 13882 TRANSPO IB251 MOBILETRON VR-B360 CARGO 235549 
342-160/04-053 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function Self Exciting Function REFERENCES.. BOSCH F00M145252 F00M145243 LESTER 21790 21791 23035 TRANSPO IB252 MOBILETRON VR-B263 CARGO 232193 	342-180/04-069 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Lamp Shorted Circuit Protection Field Shorted Circuit Protection Under/Over Voltage Indication L Terminal Drives Choke DFM Function Self Exciting Function REFERENCES.. BOSCH F00M145286 F00M145394 LESTER 23228 23302 TRANSPO IB286 MOBILETRON VR-B270 CARGO 234770 FIT UNIT CA1761IR 	342-190/04-071 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 32% LRC 5 sec Field, Shorted Circuit Protection Sense IG Open Indication Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. BOSCH F00M145873 F00M145236 LESTER 11129 11689 22514 22517 TRANSPO IB236 MOBILETRON VR-B243 CARGO 233587 
342-200/04-082 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM Function Self Exciting Function REFERENCES.. BOSCH F00M145249 F00M145260 LESTER 12383 12490 12491 12716 TRANSPO IB260 MOBILETRON VR-B363 	342-210/04-086 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M145247 LESTER 11068 11132 11332 11333 TRANSPO IB247 MOBILETRON VR-B247 CARGO 235207 	342-230/04-104 FEATURES A-Circuit Voltage Set Point 28.20V Soft Start 30% , LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM Function Self Exciting Function REFERENCES.. BOSCH F00M144178 TRANSPO IB125 

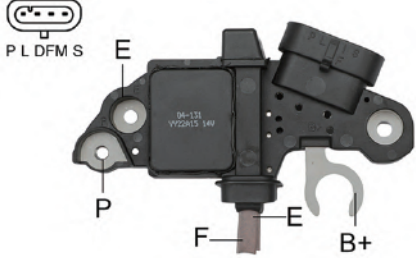
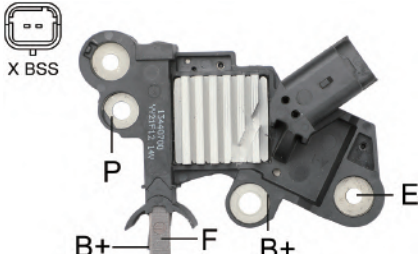


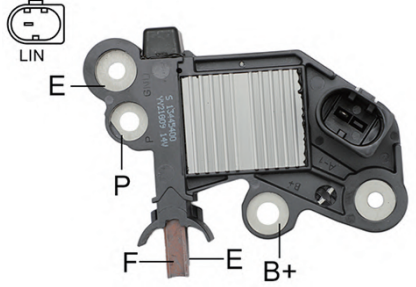

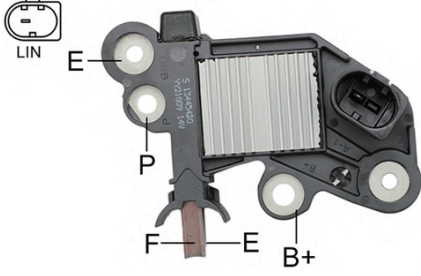
342-240/04-106 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00M145272 F00M145293 LESTER 13954 23248 23285 23964 TRANSPO IB293 MOBILETRON VR-B385 CARGO 237270 	342-250/04-107 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00MA45221 F00M145880 LESTER 23254 23375 TRANSPO IB262 MOBILETRON VR-B880 CARGO 236455 	342-252 FEATURES A-Circuit Voltage Set Point 14.30 V Soft Start 25 % LRC 3 sec Self Exciting Function BSS 3 ID=31 BSS Regulator REFERENCES.. FIT UNITS F00M145881 F00MA45222 LESTER 11077 TRANSPO IB5881 MOBILETRON VR-B657 
342-253 FEATURES A-Circuit Voltage Set Point 14.30 V Soft Start 25% Self Exciting Function BSS 3 ID=12 BSS Regulator REFERENCES.. OEM NO F00M145289/145656/145316/ 145882/145258/FOOMA45223 LESTER 23249 23251 23252 TRANSPO IB5289 	342-270/04-115 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M144110 CARGO 231716 235700 331535 MOBILETRON VR-B371 LESTER 22586 23106 23107 23129 	342-280/04-116 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00M145304 F00M144131 CARGO 237816 TRANSPO IB321 MOBILETRON VR-B131 
342-281 FEATURES A-Circuit Voltage Set Point 13.80 V Soft Start 20 % LRC 3 sec Self Exciting Function BSS 3 ID=22 BSS Regulator REFERENCES.. FIT UNITS F00M145301 F00M144188 TRANSPO IB4188 	342-282 FEATURES A-Circuit Voltage Set Point 13.80 V Soft Start 20 % LRC 3 sec Self Exciting Function BSS 3 ID=12 BSS Regulator REFERENCES.. OEM NO F00M145650 F00M144194 0124225056 0124225068 	342-290/04-125 FEATURES A-Circuit Voltage Set Point 14.20V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M145266 F00M144155 LESTER VR-B883 TRANSPO CA1701IR MOBILETRON IB266 CARGO 23269 23344 

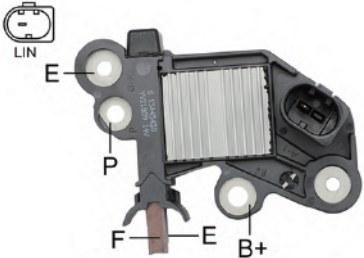
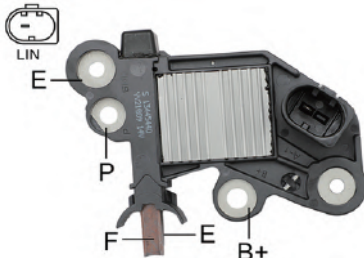
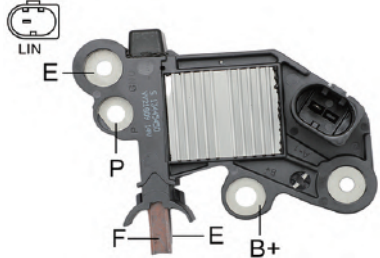
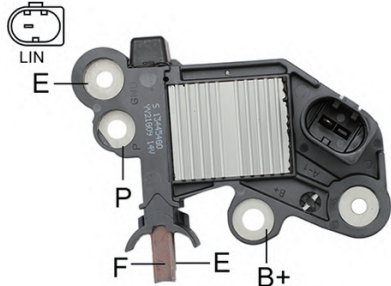



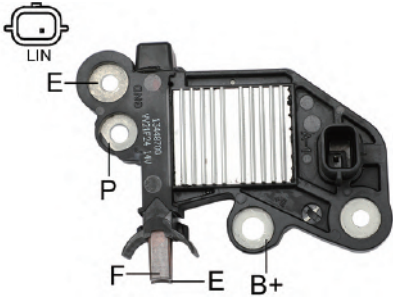
342-300/04-126 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M145276 F00M145368 LESTER 23367 23368 23369 23540 TRANSPO IB276 MOBILETRON VR-B242 CARGO 236717 	342-320/04-129 FEATURES B-Circuit Voltage Set Point 14.70V Soft Start 30% LRC 5 Sec Field Shorted Circuit Protection Under/Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. OEM NO Opel 93190141 FIT UNIT GM 13308508 93188158 BOSCH F 00M 144 109 F 00M 144 160 CARGO 332132 333273 	342-330/04-133 FEATURES A-Circuit Voltage Set Point 14.70V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. BOSCH F00M145227 LESTER 13805 TRANSPO IB227 MOBILETRON VR-B265 CARGO 235856 
342-340/04-134 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function REFERENCES.. BOSCH F00M145224 F00M144241 LESTER 11076 13770 13771 13860 TRANSPO IB241 MOBILETRON VR-B259 	342-350/04-141 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00M145292 F00M144108 CARGO 237736 TRANSPO IB6132 MOBILETRON VR-B132 	342-360/04-147 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00MA45219 F00M145280 TRANSPO IB5219 MOBILETRON VR-B280 
342-361 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00M145651 FIT UNIT 0124525106 	342-362 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25% LRC 3 Sec Self Exciting Function BSS 2 ID=56 BSS Regulator REFERENCES.. LESTER 20023 23829 	342-363 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. 








342-370/04-150 FEATURES B-Circuit Voltage Set Point 28.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG Open Indication Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M144106 F00M144122 LESTER 20617 23883 23887 TRANSPO IB5300 MOBILETRON VR-B122B CARGO 237569 	342-400/04-162 FEATURES B-Circuit Voltage Set Point 13.70V Soft Start 25% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH F00MA45212 F00M145311 TRANSPO IB5379 MOBILETRON VR-B379 	341-AB0 FEATURES B-Circuit Voltage set Point 14.50V SoftStart 12.5% LRC 2.5 sec Field Short Circuit Protection Under/Over Voltage Indiction Self exciting function REFERENCES.. ISKRA NO 16.915.561, 5.320 EGI NO 80ISK-109 BOSCH NO WG1789315 BOSCH UNIT 556934 LESTER NO 14887, 21094 
342-560 FEATURES B-Circuit Voltage Set Point 28.20 V Soft Start 12.5 % LRC 5 sec Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke DFM Function REFERENCES.. 	342-580/04-164 FEATURES B-Circuit Voltage Set Point 28.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection IG Open Indication Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH F00M145307 F00M145256 LESTER 12387 12389 12723 12801 TRANSPO IB298 MOBILETRON VR-B396 CARGO 231523 	342-590/04-165 FEATURES B-Circuit Voltage Set Point 28.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Sense/IG Open Indication Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. BOSCH 0-124-555-005 F00M144103 LESTER 11911 12493 12591 12594 TRANSPO IB297 MOBILETRON VR-B268 CARGO 233117 
342-700 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00MA45220 F00M145866 TRANSPO IB6866 CARGO 332889 	342-701 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00M145322 TRANSPO IB5290 MOBILETRON VR-B322 	342-730/04-0261 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function Self Exciting Function REFERENCES.. BOSCH F00M145279 F00M145369 LESTER 11081 11082 13801 13998 TRANSPO IB5369 MOBILETRON VR-B369 








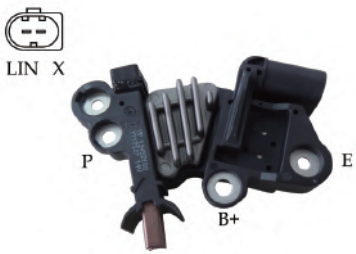

342-940 FEATURES A-Circuit Voltage Set Point 14.30 V Soft Start 20 % LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. LESTER 11495 	342-950 FEATURES A-Circuit Voltage Set Point 14.60 V Soft Start 18 % LRC 5 sec Sense Loss Indication Field Shorted Circuit Protection Under / Over Voltage Indication Self Exciting Function REFERENCES.. OEM NO F00MA45228 F00M145207 F00M145347 LESTER 21346 22815 MOBILETRON VR-B267 TRANSPON IB347 	342-GA0 FEATURES B-Circuit Default Regulation Set Voltage 28.30V Soft Start 25% Self Exciting Function LIN regulator: 12V LIN BUS LIN 2.1, ID -, Class - REFERENCES.. BOSCH NO 0272222012 IK A NO 1 4217 1 LESTER 21561 21587 
342-990 FEATURES A-Circuit Voltage Set Point 28.40 V Soft Start 18 % LRC 2.5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self Exciting Function REFERENCES.. 	343-020/04-140 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH F00M145698 F00M144150 TRANSPON IB6150 MOBILETRON VR-B150 CARGO 235809 LESTER 20006 	343-021 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00M145278 124525080 
343-022 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH F00MA45301 FIT UNIT 0124425077 LRA03464 	343-023 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class09 LIN Regulator REFERENCES.. 	343-030/04-143 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH F00M144157 F00M145309 TRANSPON IB885 MOBILETRON VR-B885 LESTER 11215 







343-032 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH F00M145887 	343-033 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN1 Class03 LIN Regulator REFERENCES.. FIT UNIT F00M145885 F00M144157 F00M145309 F00M145377 11215 VR-B885 LESTER MOBILETRON TRANPO IB885 	343-040/04-146 FEATURES B-Circuit RVC=0 V set=13.80V RC=70% V set=14.45V Soft Start 18.75% LRC 2.5 sec DFM function RVC Regulator REFERENCES.. BOSCH F00M145314 F00M145328 TRANPO IB696 LESTER 11075 11125 1126 11127 
343-050 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH F00M144197 F00M1474151 TRANPO IB6179 MOBILETRON VR-B4199 	343-060 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. HITACHI LR1180-858S 	344-020/04-113 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication L Terminal Drives Choke DFM Function Self Exciting Function REFERENCES.. OEM NO 9RC7129C FIT UNIT JFZ1150-0100 
344-030/04-114 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection IG/Sense Open Indication Under/Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. BOSCH F00M145278 124525080 CARGO 330189 WAI/TRANPO IB875 	344-040/04-117 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under/ Over Voltage Indication L Terminal Drives Choke DFM Function Self Exciting Function REFERENCES.. 	344-050/04-128 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection L Terminal Drives Choke Under/Over Voltage Indication DFM Function Self Exciting Function REFERENCES.. BOSCH 1275200003 0272220703 




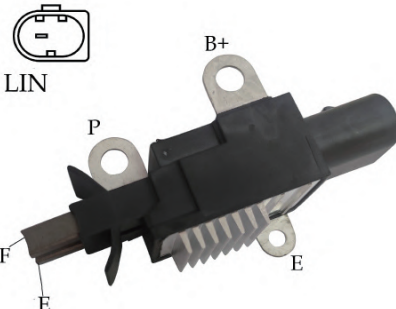



344-060/04-131 FEATURES B-Circuit Voltage Set Point 14.70V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM Function REFERENCES.. BOSCH F00M145330 	344-070/04-142 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00M346066 LESTER 11336 TRANPO IB6066 	344-080/04-155 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection L Terminal Drives Choke Under/Over Voltage Indication DFM Function Self Exciting Function REFERENCES.. BOSCH 0272220706 0272220707 
344-090/04-160 FEATURES B-Circuit Voltage Set Point 14.10V REFERENCES.. BOSCH 0190062001 0190062002 TRANPO IB305 LESTER 12216 13009 13014 13018 CARGO 130675 MOBILETRON VR-B190 	344-100/04-161 FEATURES B-Circuit Voltage Set Point 14.40V REFERENCES.. BOSCH 9-190-457-002 TRANPO IB400 CARGO 131297 MOBILETRON VR-B218 	344-500 FEATURES B-Circuit Voltage Set Point 28.50V REFERENCES.. BOSCH 9190085000 0192033003 FIT UNIT 9120080039/049/055 
344-540 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH 0272220815 F000BL0732 	344-541 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH 0272220854 06J903023G 04C903023L F000BL080306S F000BL08F201S 	344-542 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % LRC 3 Sec Self Exciting Function LIN1 Class03 LIN Regulator REFERENCES.. OEM NO 0272220894 




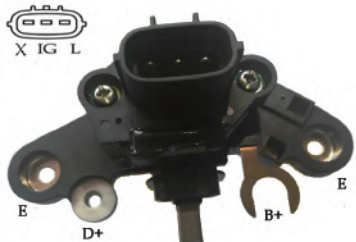

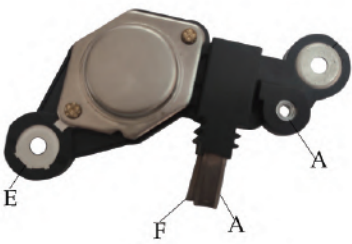
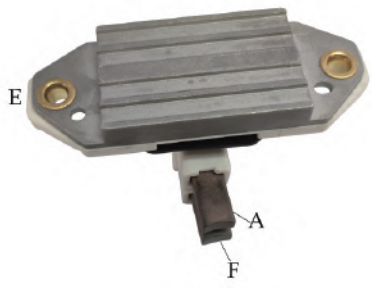
344-543 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % LRC 3 Sec Self Exciting Function LIN1 Class03 LIN Regulator REFERENCES.. OEM NO 0272220809 0272220839 MOBILETRON VR-B839 0125711030 0125711055 0125812009 	344-544 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % LRC 3 Sec Self Exciting Function LIN2 class 08 LIN Regulator REFERENCES.. OEM NO 0272220807 MOBILETRON VR-B807 0125711124 0125711125 	344-545 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % LRC 3 Sec Self Exciting Function LIN1 class02 LIN Regulator REFERENCES.. OEM NO 0272220835 MOBILETRON VR-B835 0125811054 
344-546 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25 % LRC 3 Sec Self Exciting Function LIN1 Class04 LIN Regulator REFERENCES.. OEM NO 0272220843 MOBILETRON VR-B843 	344-547 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % Self Exciting Function LIN1.3 Class 05 LIN Regulator REFERENCES.. OEM NO 0272220855 0125811028 0125811033 0125811035 MOBILETRON VR-B855 	344-570 FEATURES B-Circuit Voltage Set Point 14.00V Soft Start 25 % LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH 0272220856 
344-600 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 5 Sec C Terminal Regulator Field Shorted Circuit Protection Self Exciting Function Over Voltage Indication REFERENCES.. NISSIAN 23100-3TS3B-C106 	344-670 FEATURES B-Circuit Voltage Set Point 28.00V REFERENCES.. OEM NO 2P1699 FIT UNIT 1117236 	344-870 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % LRC 3 Sec Self Exciting Function LIN1 class06 LIN Regulator REFERENCES.. OEM NO 0272220827 F000BL0825 F000BL0890 MOBILETRON VR-B827 










344-871 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25 % LRC 3 Sec Self Exciting Function LIN1 Class01 LIN Regulator REFERENCES.. OEM NO 0272220810  	345-010/04-078 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 19% LRC 9 sec Field, Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. BOSCH F00M346026 F00M346010 LESTER 23925 23977 23978 TRANSPON IB6026 MOBILETRON VR-B026 CARGO 330331 FIT UNIT CA1922IR  	345-020/04-089 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 19% LRC 9 sec Field, Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. BOSCH F00M346340 F00M346011 LESTER 24077 TRANSPON IB6011 CARGO 333277  
345-030/04-118 FEATURES B-Circuit Voltage Set Point 13.70V Soft Start 25% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH F00M346056 F00M346097 LESTER 11223 11347 11568 20008 TRANSPON IB6056 MOBILETRON VR-B0506 CARGO 330116 FIT UNIT 0121715008  	345-040/04-119 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH F00M346020 MOBILETRON VR-B020  	345-050/04-121 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication L Terminal Drives Choke DFM Function Self Exciting Function REFERENCES.. BOSCH 1275105104 1907107613 0272220704  
345-060/04-122 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. BOSCH F00M346135 LESTER 23561 TRANSPON IB6135 MOBILETRON VR-B135  	344-AZ1 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN1 class11 ID: 88 LIN Regulator REFERENCES.. BOSCH NO 0272220823 BOSCH UNIT 0125813002 0125813009  	344-B00 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 Sec Self Exciting Function LIN1 class02 LIN Regulator REFERENCES.. OEM NO F00BL0732 0272220845  


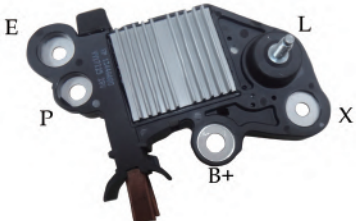



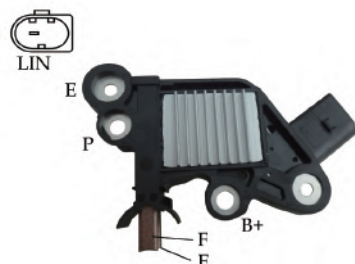
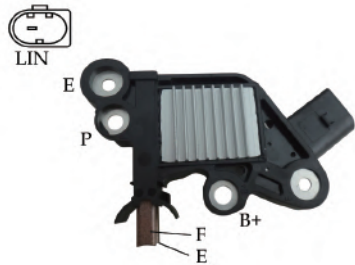

345-090/04-156 FEATURES B-Circuit Voltage Set Point 13.7V Soft Start 25% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. BOSCH F00M346139 F00M346092 MOBILETRON VR-B092 	345-091 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % LRC 3 sec Self Exciting Function LIN1 class08 LIN Regulator REFERENCES.. OEM NO F00M346163 MOBILETRON VR-B6164 	345-100 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 19% LRC 9 sec Field, Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM Function REFERENCES.. BOSCH F00M346137 F00M346028 LESTER 11221 11586 11714 TRANSP IB6137 CARGO 330805 
345-110 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 12.5% LRC 5 sec Field Shorted Circuit Protection Over Voltage Indication REFERENCES.. BOSCH 0272220718 F000BL0657 F000BL06J5 RB3451A UTM NO 310N10770Z ZAUFER ARB3451 VLTAG 052.000.203.210 PSH ARB3451UT KRAUF 	341-321 FEATURES A-Circuit Voltage Set Point 14.40 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under/ Over Voltage Indication REFERENCES.. LESTER NO 13300 MOBILETRON VR-B391 WAI/TRANSP IB391 FIT UNIT 19120060020 	345-180/04-145 FEATURES B-Circuit Voltage Set Point 14.00 V LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. CARGO 332016 LESTER 11220, 11303, 11307, 20036 WAI NO IB6037 MOBILETRON VR-B021 
345-182 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % LRC 3 sec Self Exciting Function LIN1 class08 LIN Regulator REFERENCES.. OEM NO F00M346163 MOBILETRON VR-B6164 	345-183 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class15 LIN Regulator REFERENCES.. EGI NO 80BO-373 BOSCH NO F00M346112 PSH NO 052.000.186.210 AS NO ARE0204P 	345-190/04-144 FEATURES B-Circuit Voltage Set Point 14.00 V LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. CARGO 333357, 333562 LESTER 11345, 11346, 11722, 20035, 20251, 20528, 20529, 22589 WAI IB6165 MOBILETRON VR-B057 




345-191 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Funtion LIN1 class6 LIN Regulator REFERENCES.. OEM NO F00M346082  	345-201 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class08 LIN Regulator REFERENCES.. OEM NO F00M346152 F00M346164 MOBILETRON VR-B6164  	345-202 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12 % LRC 3 Sec Self Exciting Function LIN1.3 class4 LIN Regulator REFERENCES.. OEM NO F00M346129  
345-210 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % Self Exciting Function BSS 3 ID=6 BSS Regulator REFERENCES.. OEM NO F00M346019 F00M346024 F00M346033 F00M346089 MOBILETRON VR-B033 TRANSPO IB6024  	345-220 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20 % LRC 3 Sec Self Exciting Function BSS-3 ID=1 BSS Regulator REFERENCES.. OEM NO F00M346051 F00M346070  	345-221 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25 % Self Exciting Function BSS-3 ID=6 Class 3 BSS Regulator REFERENCES.. OEM NO F00M346138 F00M346042 F00M346090  
345-260 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 12.5% LRC 2.5 Sec Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drives Choke REFERENCES.. OEM NO 0272220702 F000BL0118  	345-270 FEATURES B-Circuit Voltage Set Point 13.80V Soft Start 12.5% LRC 3 Sec Self Exciting Funtion LIN1 class11 LIN Regulator REFERENCES..  	344-BL0 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 30 % LRC 5 Sec C Terminal Regulator Field Shorted Circuit Protection Self Exciting Function REFERENCES.. OEM NO 23100-4KV0A BOSCH NO 01275200010 BOSCH UNIT F000BL06Z4  







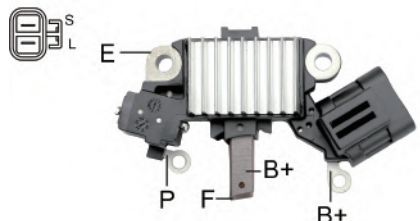


346-010/04-025 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection IG Open Indication Under Voltage Indication Over Voltage Indication L Terminal Drives Choke DFM function REFERENCES.. BOSCH 1197311506 1197311516 LESTER 13356 13729 13734 13761 TRANPO IB545 MOBILETRON VR-B238 CARGO 138999 	346-020/04-027 FEATURES B-Circuit Voltage Set Point 28.50V Soft Start 30% Field Shorted Circuit Protection IG Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. BOSCH 197311558 1197311554 LESTER 23512 23513 TRANPO IB545 MOBILETRON VR-B558B CARGO 234522 	346-030/04-043 FEATURES B-Circuit Voltage Set Point 28.50V Soft Start 30% Field Shorted Circuit Protection IG/Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. BOSCH 1197311543 LESTER 12590 23518 TRANPO IB543 MOBILETRON VR-B543B CARGO 234112 
348-020 FEATURES B-Circuit Voltage Set Point 14.0 V Soft Start 25% LRC 3S Self Exciting Function LIN2 class4 LIN Regulator REFERENCES.. OEM NO 0272223028 0126712006 0126712005 	348-030 FEATURES B-Circuit Voltage Set Point 14.0 V Soft Start 25% LRC 3S Self Exciting Function LIN1 class3 LIN Regulator REFERENCES.. OEM NO 0272223021 0126312140 0126312139 	348-040 FEATURES B-Circuit Voltage Set Point 13.7 V Soft Start 25% LRC 5S Self Exciting Function LIN1 class23 LIN Regulator REFERENCES.. OEM NO 0272223011 0126312086 0126312085 
340-BD0 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 11.204.062 FIT UNIT Letrika AAK 3830 	340-CLO FEATURES A-Circuit (Metal Can) Voltage Set Point 28.50V REFERENCES.. OEM NO 11.204.584 	340-D30 FEATURES A-Circuit Voltage Set Point 28.75V REFERENCES.. OEM NO 0120468132 




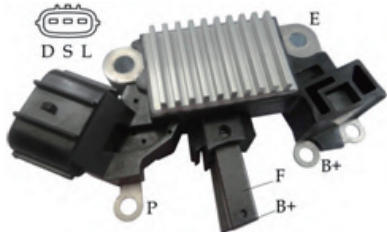
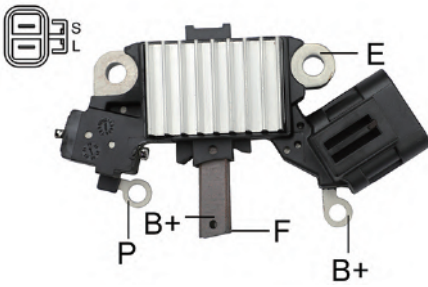




341-A50 FEATURES A-Circuit Voltage Set Point 14.30 V Soft Start 30 % Field Lamp Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke Self Exciting Function REFERENCES.. LESTER 21345R FIT UNIT 0123315008 0123315017 	341-A60 FEATURES A-Circuit Voltage Set Point 14.40 V REFERENCES.. OEM NO 11.203.390 TRANPO MG563 	341-A90 FEATURES A-Circuit Voltage Set Point 28.50 V REFERENCES.. OEM NO 5.356 11.201.753 
341-A91 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO 11.201.943 	341-A93 FEATURES A-Circuit Voltage Set Point 28.05 V REFERENCES.. OEM NO 2111001 CARGO 110678, 111705 LESTER 13278, 14611 FIT UNIT F042302058, F042A02058, F042A02058FDB Vehicle Model Toyota Camry 1.8 / 2.0 / 2.2 	341-AA0 FEATURES A -Circuit Voltage Set Point 14.40V REFERENCES.. 
341-AE0 FEATURES A-Circuit Voltage Set Point 14.50 V REFERENCES.. OEM NO 11.201.484 	341-AF0 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.60 V REFERENCES.. OEM NO F002G90078 	341-AG0 FEATURES A-Circuit Voltage Set Point 14.70 V REFERENCES.. 

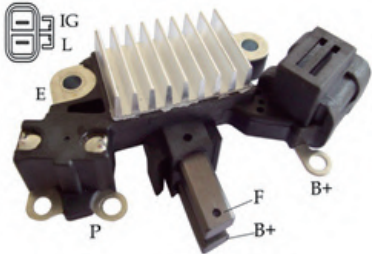

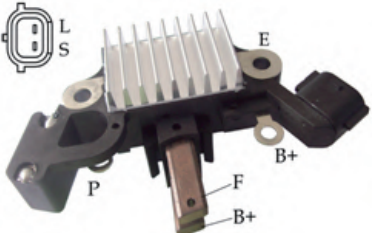
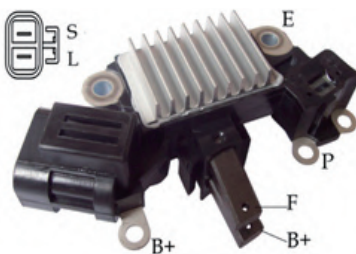

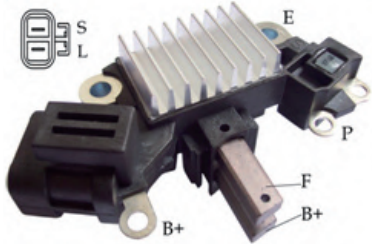

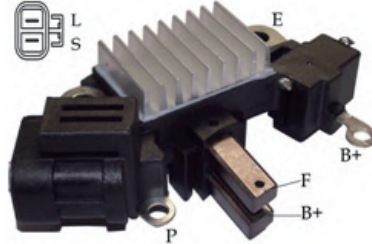
342-A60 FEATURES B-Circuit Voltage Set Point 28.40 V LRC 2.5 sec Field Shorted Circuit Protection Under / Over Voltage Indication REFERENCES.. 	342-AC0 FEATURES B-Circuit Voltage Set Point 28.20 V Field Lamp Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke Self Exciting Function REFERENCES.. FIT UNIT 0272221006 606201 0124655297 	342-AD0 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 12.5% Field Lamp Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke Self Exciting Function REFERENCES.. FIT UNIT 0272221005 0124625103 
342-AH0 FEATURES A-Circuit Voltage Set Point 14.60 V Soft Start 18% LRC 2.5 Sec Field Lamp Shorted Circuit Protection Under / Over Voltage Indication DFM Function REFERENCES.. OEM NO 0124525017 0124425033 0124425040 F00M144172 F00M145226 F00M145670 11043 11184 11186 11187 VR-B372 IB226 LESTERR MOBILETRON TRANSP0 	342-AQ0 FEATURES A-Circuit Voltage Set Point 13.80 V Soft Start 25 % LRC 3 Sec Self Exciting Function BSS 03 ID=04 BSS Regulator REFERENCES.. OEM NO F00M144193 	342-AR0 FEATURES B-Circuit Default Regulation Set Voltage 28.3V Soft Start 25% Self Exciting Function LIN Regulator LIN BUS LIN 2.1 Identifier for the Rx-Frame 41 Identifier for the Tx-Frame1 10 Identifier for the Tx-Frame2 20 REFERENCES.. OEM NO 0272222011 
342-AZ0 FEATURES B-Circuit Voltage Set Point 28.40 V Soft Star 12.5% Self Exciting Function Field Shorted Circuit Protection Under / Over Voltage Indication DFM Function REFERENCES.. OEM NO 0272222004 	342-BV0 FEATURES B-Circuit Voltage Set point 28.50 V soft Start 25% IG Terminal Regulator Field Shorted Circuit Protection Under / Over Voltage indication DFM function REFERENCES.. OEM NO F00MA45250 	342-CQ0 FEATURES A-Circuit Voltage Set Point 28.30 V REFERENCES.. 

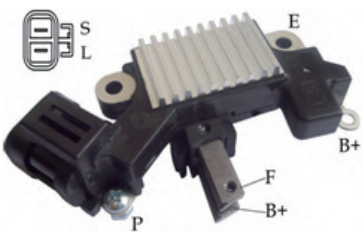
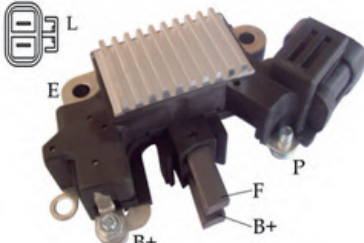
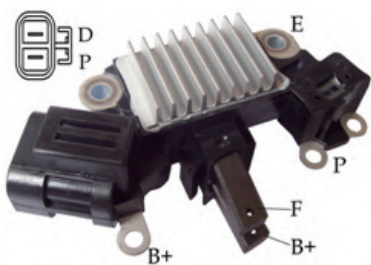
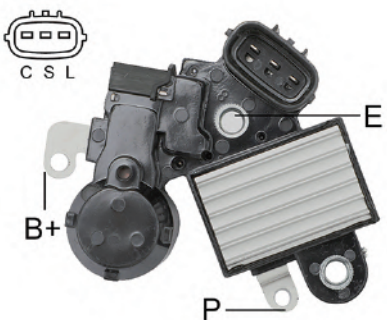

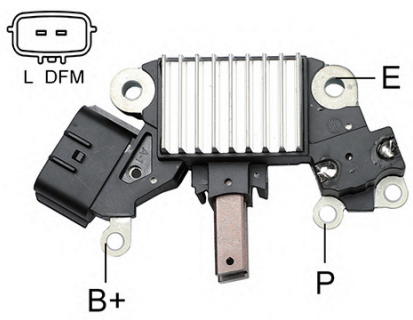
342-DX1 FEATURES A-Circuit (Metal Can) Voltage Set Point 14.60 V REFERENCES.. OEM NO F002G90078 	344-AA0 FEATURES B-Circuit Voltage Set Point 28.20 V Soft Start 12.5% Field Shorted Circuit Protection Under / Over Voltage Indication L Terminal Drive Choke REFERENCES.. OEM NO 0272220742 	344-AM0 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 12.5 % LRC 5 Sec Self Exciting Function LIN1 class11 LIN Regulator REFERENCES.. BOSCH NO 0272220776 BOSCH UNIT F000BL07T1 F 000 BL0 8D1 GAUSS NO GA352 CARGO NO 335783 
344-AN0 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 12.5 % LRC 5 Sec Self Exciting Function LIN1 class11 LIN Regulator REFERENCES.. BOSCH NO 0272220867 LESTER 20035 BOSCH UNIT 0986082330 	344-AU0 FEATURES B-Circuit Voltage Set Point 13.80 V Soft Start 12% Self Exciting Function LIN1.3 class26 LIN Regulator REFERENCES.. OEM NO 0272220890 	344-AU1 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 12.5 % Self Exciting Function LIN1.3 class 8 LIN Regulator REFERENCES.. OEM NO 0272220879 
344-AU2 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % Self Exciting Function LIN1.3 class 15 LIN Regulator REFERENCES.. EGI NO 80BO-364 BOSCH NO 0 272 220 818, F 00M 346 112 PSH NO 052.000.726.210, 052.000.726.016 	344-AZ0 FEATURES B-Circuit Voltage Set Point 14.00 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN1 class03 LIN Regulator REFERENCES.. OEM NO 0272220844 	341-AN0 FEATURES B-Circuit, Voltage Set Point 14.40 V Soft Start 12.5 % LRC 2.5 sec Field Shorted Circuit Protection Under Voltage Indication, Over Voltage Indication REFERENCES.. ISKRA 1A1716 MAHLE 72496149 MG927 


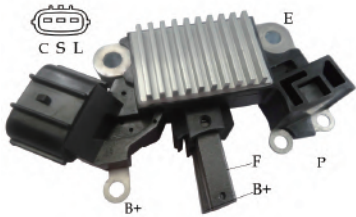
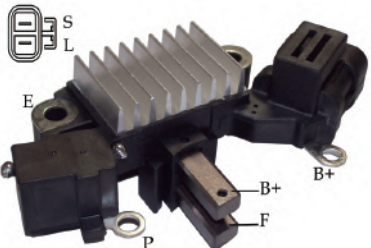




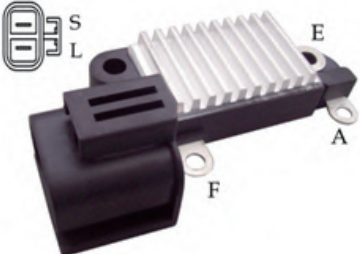
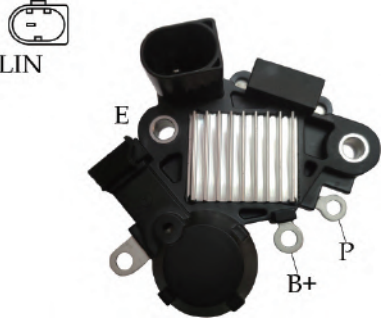
341-AP0 FEATURES B-Circuit Voltage Set Point 14.40 V Soft Start 12.5 % LRC 2.5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. ISKRA IA1472 MAHLE MG169 	343-034 FEATURES B-Circuit Voltage Set Point 14.30 V LRC 3 sec Self Exciting Function LIN Regulator LIN1.3 ID: 32 REFERENCES.. BOSCH F 00M 145 310 F 00M 145 378 MOILETRON VR-B378 WAI IB5378 	340-DZ0 FEATURES B-Circuit Voltage Set point 14.50 V soft Start 12.5% LRC 5Sec L Terminal Drives Choke Field Shorted Circuit Protection Under/Over Voltage Indication Self Exciting Function REFERENCES.. LESTER 21572 FIT UNIT ohn Deere Agricultural Tractor 6090MC 4045HL490, 4.5 2013-2015 
342-GP0 FEATURES A-Circuit Voltage Set Point 14.30 V Soft Start 20 % LRC 3 sec Self Exciting Function BSS-3 ID=8 Class 4 BSS Regulator REFERENCES.. LESTER 13976 FIT UNIT 0 122 0AA 090 OEM NO F 00M 255 203 WAI IB203 MOBILETRON VR-B5204 		

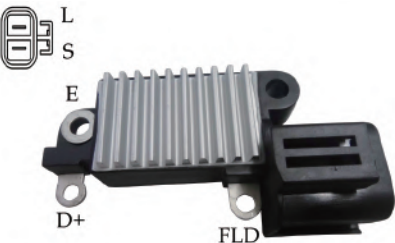
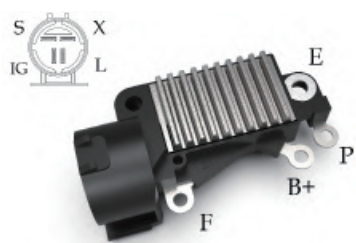
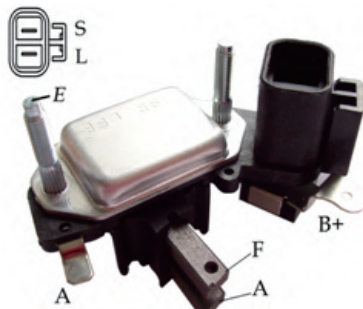





350-010/05-001 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L190G-7340 23215-5V10 234612 CARGO 13713 13760 13778 13789 LESTER VR-H2000-44 MOBILETRON IH738 TRANSPO LR180-756B LR1100-709 FIT UNIT 	350-020/05-004 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L170G-3319 L170G-6308 139980 CARGO 21302 LESTER VR-H2000-41 MOBILETRON IH776 TRANSPO LR170-505 LR170-505B FIT UNIT 	350-030/05-008 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L1100G-3340 L1100G-9340 138717 CARGO 13612 13639 13657 13712 LESTER VR-H2000-28 MOBILETRON IH766 TRANSPO LR1100-703 LR1110-705 FIT UNIT 35-8127 WAI 
350-040/05-009 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Under Voltage Indication Over Voltage Indication REFERENCES.. CARGO 230433 FIT UNIT TR1E-123 LR1100-501 	350-050/05-014 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. CARGO 232443 LESTER 21830 21831 MOBILETRON VR-H2000-50 TRANSPO IH769 FIT UNIT LR150-511 LR1100-502F 	350-060/05-015 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L170G-5315 L170G-6315 138727 234314 CARGO 13637 13640 13643 22840 LESTER VR-H2000-38 VR-H2000-43 MOBILETRON IH767 TRANSPO LR170-743 LR170-745 FIT UNIT 35-8126 WAI 
350-070/05-016 FEATURES A-Circuit Voltage Set Point 28.40V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under/Over Voltage Indication REFERENCES.. OEM NO 8971489141 CARGO VR-H2000-70B LESTER LR280-508 LR280-501 MOBILETRON LR280-506 FIT UNIT 	350-080/05-018 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under/Over Voltage Indication REFERENCES.. OEM NO L185G-2340 234311 CARGO 13641 13642 13645 LESTER VR-H2000-27 MOBILETRON IH765 TRANSPO LR180-742 LR185-701 FIT UNIT 35-8128 WAI 	350-090/05-025 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under/Over Voltage Indication REFERENCES.. OEM NO L185G-2340 234311 CARGO 13641 13642 13645 LESTER VR-H2000-27 MOBILETRON IH765 TRANSPO LR180-742 LR185-701 FIT UNIT 




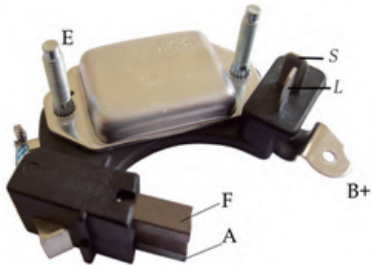



350-100/05-035 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO TR1Z-108 TR1Z-108B MOBILETRON VR-H2000-39 FIT UNIT LR170-501C LR170-502B 	350-110/05-036 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L1100G8340 L1110G53402 CARGO 231534 LESTER 13612 13657 13826 13901 MOBILETRON VR-H2000-46 TRANPO IH774 	350-120/05-037 FEATURES A-Circuit Voltage Set Point 28.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO LR250-517 
350-130/05-041 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. FIT UNIT LR190-742 LESTER 13829 MOBILETRON VR-H2000-63 TRANPO IH742 	350-140/05-042 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under/Over Voltage Indication Without Sense Open Indication REFERENCES.. FIT UNIT LR160-503 8972458502 	350-150/05-043 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. 
350-160/05-047 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L170G-6315 LESTER 13643 22840 MOBILETRON VR-H2000-43 TRANPO IH782 CARGO 234314 FIT UNIT LR170-745 	350-170/05-053 FEATURES A-Circui Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO 1204434 13117236 LESTER 23801 23804 MOBILETRON VR-H2000-64 TRANPO IH669 CARGO 238691 FIT UNIT LR1100-508 LR1100-503 	350-180/05-054 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L180G-63401 L185G-5340 LESTER 13825 13900 13939 13940 MOBILETRON VR-H2000-62 TRANPO IH744 CARGO 235438 FIT UNIT LR1100-705E LR1100-710 





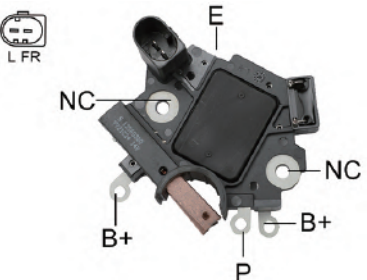

350-190/05-055 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. LESTER 23215 FIT UNIT 23100-VC100 	350-200/05-059 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L1100G-3340 L1100G-9340 13612 13639 13657 13712 VR-H2000-28 IH766 138717 CARGO LR1100-703 LR1110-705 FIT UNIT 35-8127 	350-210/05-065 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. FIT UNIT LR170-760 LR170-767B 
350-230/05-083 FEATURES A-Circuit Voltage Set Point 28.40V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. FIT UNIT LR250-708E 898075-0260 	350-250/05-089 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Under Voltage Indication Over Voltage Indication REFERENCES.. CARGO 230433 FIT UNIT TR1E-123 LR1100-501 	350-270/05-091 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Lamp Shorted Circuit Protection Under/Over Voltage Indication REFERENCES.. LESTER 11120 MOBILETRON VR-H2000-85 TRANSPON IH746 CARGO 235661 FIT UNIT LR1130-701 
350-290/05-095 FEATURES A-Circuit Voltage Set Point 28.40V Field Shorted Circuit Protection Sense Open Indication REFERENCES.. ISUZU NO 8971481090 UTM NO KH5315A, RH5083A, RH5083B ZAUFER 310N10478Z HITACHI UNIT LR270-702 LESTER NO 20619 VOLTAG ARH5083 	350-300/05-096 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 26% LRC 4 sec Vset of "C" is controlled by duty cycle REFERENCES.. LESTER 11119 11121 MOBILETRON VR-H2000-73 TRANSPON IH741 FIT UNIT LR1110-724 LR1110-725 	350-310/05-099 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO 21505-10753 


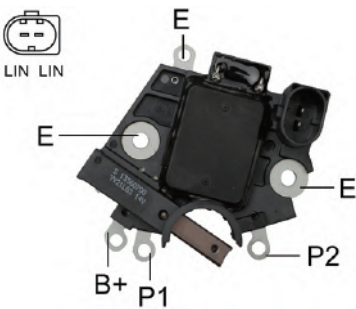
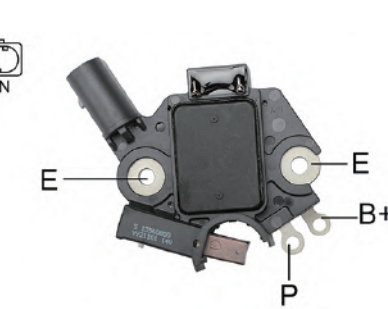

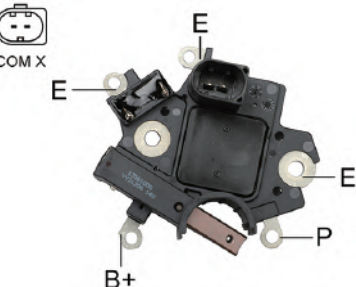
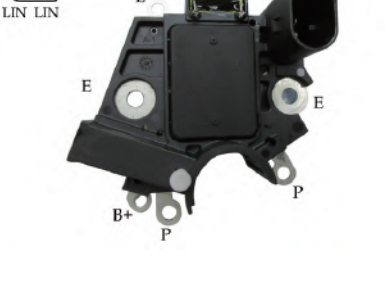

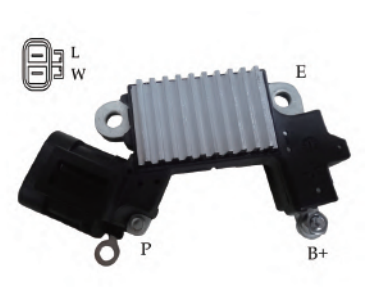
350-320/05-100 FEATURES A-Circuit Voltage Set Point 14.40V REFERENCES.. 	350-330/05-103 FEATURES A-Circuit Voltage Set Point 28.25V Soft 30% Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Voltage Set Point 14.40V REFERENCES.. 	350-370/05-107 FEATURES A-Circuit Voltage Set Point 14.45V Soft Start 30% Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. 
350-390/05-109 FEATURES PD Regulator REFERENCES.. LESTER 13788 MOBILETRON VR-H2000-51 FIT UNIT LR170-758 TRANPO IH758 	350-400/05-111 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 26% LRC 4 sec Vset of "C" is controlled by duty cycle REFERENCES.. FIT UNIT 23100-EW800 	350-410/05-112 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% LRC 10 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. LESTER 13937 MOBILETRON VR-H2000-45 TRANPO IH737 FIT UNIT LR180-769 
350-420/05-113 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. 	350-650/05-024 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. CARGO 138615 FIT UNIT LR235-G3320 	350-660/05-003 FEATURES A-Circuit Voltage Set Point 28.60V REFERENCES.. OEM NO 8971126460 FIT UNIT LR250-502C LR250-507 MOBILETRON VR-H2000-86B 





350-670/05-002 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. 	350-900 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 18% LRC 5 sec C Terminal Regulator Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. TRANSPO IH743 	350-910 FEATURES A-Circuit Voltage Set Point 28.50V Under Voltage Indication Over Voltage Indication same as 05-016 with "L" terminal active function REFERENCES.. 
350-940 FEATURES A-Circuit Voltage Set Point 14.45 V REFERENCES.. 	350-970 FEATURES A-Circuit Voltage Set Point 28.50V Soft Start 18% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication L Terminal Drive Choke REFERENCES.. OEM NO LR250-507 	351-010/05-052 FEATURES A-Circuit Voltage Set Point 14.30V Field Lamp Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L180G-2340 23215-85L00 MOBILETRON VR-H2000-16 TRANSPO IH761 CARGO 135021 FIT UNIT LR165-708C LR170-738C LESTER 13333 13334 22551 WAI 35-8120 
351-020/05-088 FEATURES A-Circuit Voltage Set Point 14.30V Field Lamp Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L180G-2340 23215-85L00 MOBILETRON VR-H2000-18 TRANSPO IH762 CARGO 135022 FIT UNIT LR160-724 LR170-739B LESTER 13329 13474 13531 13533 WAI 35-8123 	351-030/05-097 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO L170-33152 23215-50Y05 MOBILETRON VR-H2000-14 CARGO 135027 FIT UNIT LR170-738 LR170-738B LESTER 13334 WAI 35-8119 	350-FB0 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25% LRC 3 Sec Self Exciting Function LIN1.3 class11 LIN Regulator REFERENCES.. OEM NO LR1180-858 



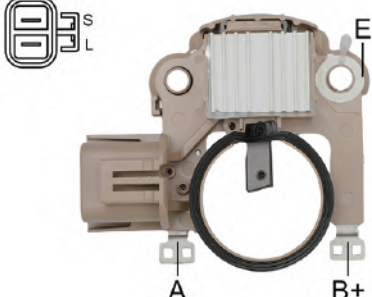






351-060/05-110 FEATURES A-Circuit Voltage Set Point 14.30V REFERENCES.. OEM NO L180-8135 23215-64J00 MOBILETRON VR-H2000-17 TRANSPO IH248 CARGO 135158 FIT UNIT LR160-723 LR170-734 LESTER 13273 13285 13287 13329 WAI 35-8116 	351-670 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30 % Field Shorted Circuit Protection Sense Open Indication IG Open Indication Under / Over Voltage Indication REFERENCES.. OEM NO VR-H2000-15 	352-010/05-005 FEATURES A-Circuit Voltage Set Point 28.5V With Capacitor REFERENCES.. 
352-030/05-007 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. OEM NO L150-93155 L160-23153 MOBILETRON VR-H2000-30 TRANSPO IH205 CARGO 137189 FIT UNIT LR150-428 LESTER 14663 14753 20192 22256 WAI 35-8136 352-130/05-032 FEATURES A-Circuit Voltage Set Point 28.40V REFERENCES.. OEM NO L225-9315 CARGO 234701 	352-040/05-010 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. OEM NO L150-33155 8-94167-410-0 MOBILETRON VR-H2000-29 TRANSPO IH252V CARGO 133544 FIT UNIT LR150-421 LR150-431 LESTER 12097 14735 20896 20897 352-220/05-048 FEATURES Without Capacitor 	352-050/05-011 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. OEM NO HITACHI L170G-1315 MOBILETRON VR-H2000-40 TRANSPO IH254V CARGO 137841 FIT UNIT LR170-420 LESTER 12273 352-250/05-056 FEATURES Without Capacitor 
352-052 FEATURES A-Circuit Voltage Set Point 14.70 V REFERENCES.. OEM NO IH254 	352-060/05-012 FEATURES A-Circuit Voltage Set Point 28.40V REFERENCES.. OEM NO HITACHI L225-8315 MOBILETRON VR-H2000-29B TRANSPO IH253V CARGO 233893 FIT UNIT LR235-402 LESTER 23431 352-190/05-044 FEATURES Without Capacitor 	352-070/05-013 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO L150-93155 L160-23153 MOBILETRON VR-H2000-30 TRANSPO IH205 CARGO 133543 137189 FIT UNIT LR150-428 LR170-406 LESTER 14663 14753 20192 22256 


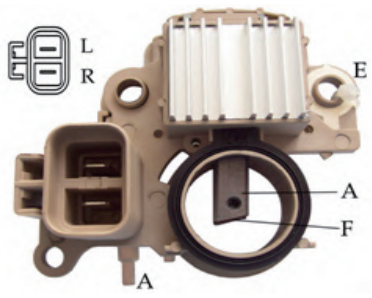
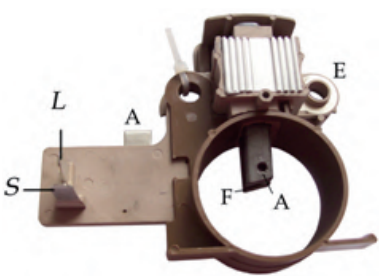





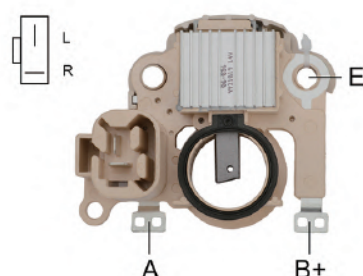
352-100/05-028 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. OEM NO L150-73154 CARGO 132432 MOBILETRON VR-H2000-36 TRANSPO LR140-406 LR140-410F 	352-110/05-030 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. OEM NO L135N-13151 L150-13152 CARGO 130834 MOBILETRON VR-H2000-31 TRANSPO IH201 LESTER 14231 14255 FIT UNITS LR135-44 LR135-61 WAI 35-8100 	352-150/05-034 FEATURES A-Circuit Voltage Set Point 28.40 V REFERENCES.. LESTER 14648, 14649, 14731 SUN NO SQHIR204 WAI IH204 HITACHI LR15078B FIT UNITS LR140-138 LR150-146 
352-210/05-046 FEATURES A-Circuit Voltage Set Point 14.70 V With Capacitor REFERENCES.. 	352-260/05-063 FEATURES A-Circuit Voltage Set Point 28.40 V REFERENCES.. 	352-330/05-076 FEATURES A-Circuit Voltage Set Point 14.30V REFERENCES.. OEM NO L150-43151 L150-63151 CARGO 130832 TRANSPO IH203 LESTER 14255 14303 14588 20477 FIT UNITS LR150-125 LR150-98 WAI 35-8134 
352-610 FEATURES A-Circuit Voltage Set Point 14.35 V Field Shorted Circuit Protection REFERENCES.. OEM NO LR170-407 LESTER 22394 	352-710 FEATURES A-Circuit Voltage Set Point 14.70 V REFERENCES.. OEM NO AFP301R6CY 	353-010/05-017 FEATURES A-Circuit Voltage Set Point 28.10V REFERENCES.. OEM NO 27050-1112A LESTER 20500 


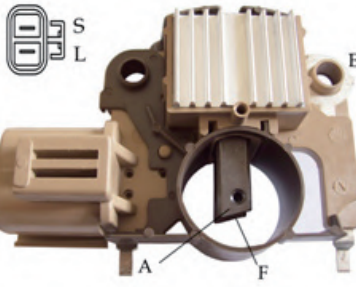
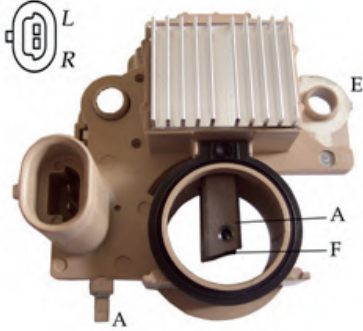
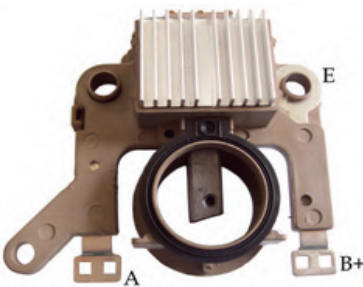

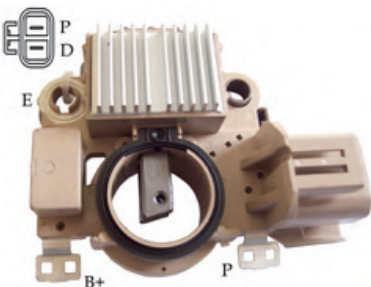



353-020/05-027 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. LESTER 14648 14649 14731 TRANSPO IH204 FIT UNIT LR140-112 LR140-131 	353-140/05-060 FEATURES A-Circuit Voltage Set Point 28.10V REFERENCES.. OEM NO 27700-1370 27700-1510 CARGO 133516 TRANSPO IH708 MOBILETRON VR-H2001-3 FIT UNITS 27040-1072 27040-1091 	353-180 FEATURES A-Circuit Voltage Set Point 29.00V REFERENCES.. 
354-010/04-097 FEATURES A-Circuit Voltage Set Point 14.10V REFERENCES.. LESTER 14648 14649 14731 	354-720/04-085 FEATURES A-Circuit Voltage Set Point 14.40V REFERENCES.. LESTER 9120080041 9120080061 9120080072 9120080122 9120080090 	356-010 FEATURES B-Circuit Voltage Set Point 14.25V Soft Start 18 % Field Shorted Circuit Protection Under/Over Voltage Indication L Terminal Drives Choke DFM Function Self Exciting Function REFERENCES.. OEM NO LR1190-914 
356-020 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class10 LIN Regulator REFERENCES.. FIT UNIT 079903015L 079903021S ALH3418NW ALH9418NW LR1190942 LR1190949 OEM NO VAG 079903803D 079903803H 	356-030 FEATURES B-Circuit Voltage Set Point 14.25V Soft Start 18 % Field Shorted Circuit Protection Under/Over Voltage Indication L Terminal Drives Choke DFM Function Self Exciting Function REFERENCES.. OEM NO LR1190-930 	356-050 FEATURES B-Circuit Voltage Set Point 14.25V Soft Start 18 % Field Shorted Circuit Protection Under/Over Voltage Indication L Terminal Drives Choke DFM Function Self Exciting Function REFERENCES.. OEM NO LR1190-913 

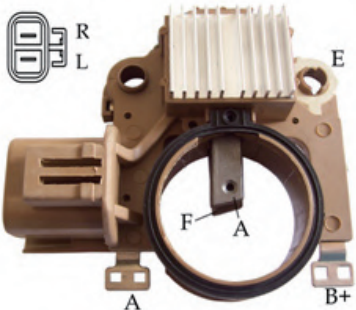

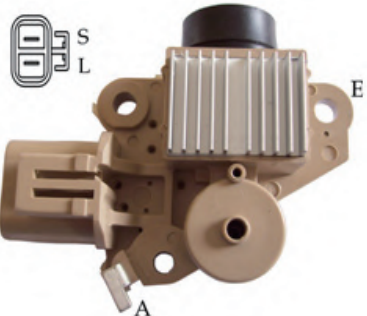
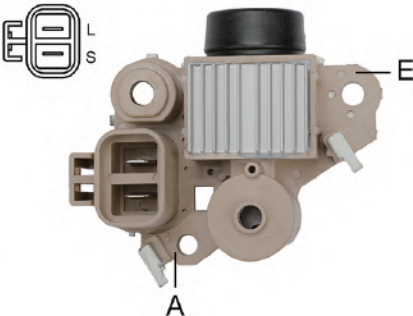
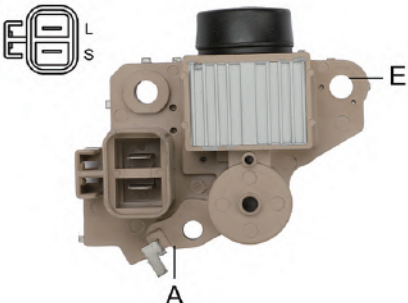

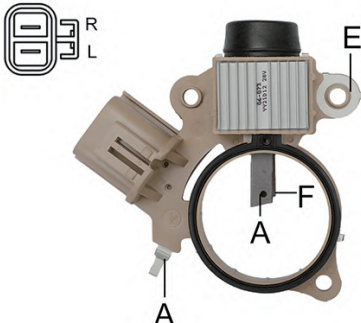


356-060 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20 % Self Exciting Function BSS_3 ID=105 BSS Regulator REFERENCES.. OEM NO LR1190-916 	356-070 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class10 LIN Regulator REFERENCES.. OEM NO LR1190-945 	356-080 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class10 LIN Regulator REFERENCES.. FIT UNIT ALH4527NW LR1190946 LR1190946B 
356-090 FEATURES A-Circuit Voltage Set Point 14.30 V Soft Start 20 % Self Exciting Function BSS 3 ID=105 BSS Regulator REFERENCES.. FIT UNIT 079903021M ALH0924NW ALH2425NW ALH3928NW LR1190924 LR1190928 VAG 079903803A OEM NO 	356-100 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20 % Self Exciting Function BSS 3 ID=105 BSS Regulator REFERENCES.. FIT UNIT 94860302903 ALH0860NW ALH0954NW ALH9095NW LR1190925 LR1190935B LR1190954E 	356-110 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class6 LIN Regulator REFERENCES.. OEM NO LR1190-941 
356-130 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class10 LIN Regulator REFERENCES.. OEM NO LR1190-952 	350-A30 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO TR1Z-108 TR1Z-108B VR-H2000-39 MOBILETRON FIT UNIT LR170-501C LR170-502B 	350-A40 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO L170G-3319 

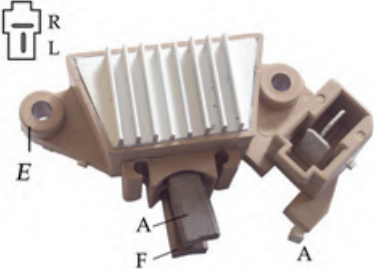
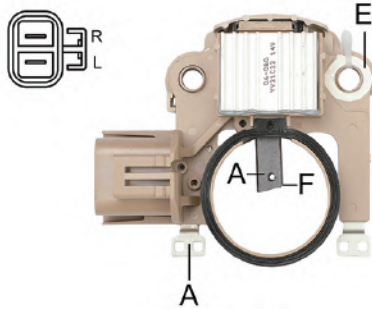

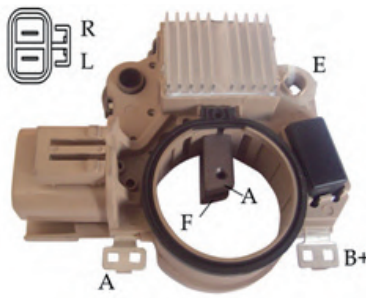
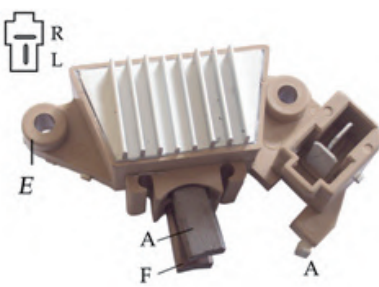

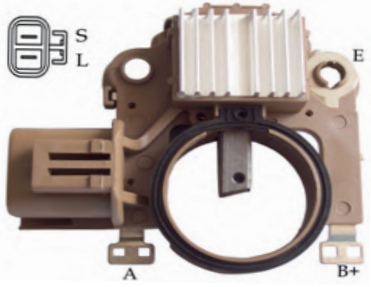
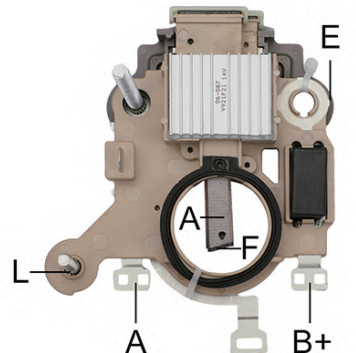
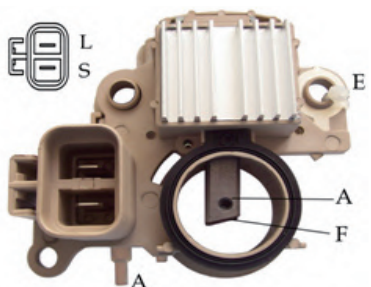
350-B30	350-BC0	350-BD0
FEATURES A-Circuit Voltage Set Point 14.20 V Soft Start 18% LRC 5 sec Under / Over Voltage Indication Self Exciting Function REFERENCES.. FIT UNITS LR1110-728B  Diagram showing terminal connections: S, L, E, P, B+.	FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 18% LRC 5 sec Field Shorted Circuit Protection Under / Over Voltage Indication REFERENCES.. LESTER 13826 OEM NO 48-001  Diagram showing terminal connections: X, L, E, P, B+, F, B+.	FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 18% LRC 5 sec Field Shorted Circuit Protection Under / Over Voltage Indication REFERENCES.. LESTER 13939 OEM NO 48-002  Diagram showing terminal connections: X, L, E, P, B+, F, B+.
350-EM0	350-F00	350-FA0
FEATURES A-Circuit Voltage Set Point 14.20 V Soft Start 31% LRC 5 Sec Vset of "C" is controlled by duty cycle REFERENCES.. OEM NO 35-1321  Diagram showing terminal connections: C, X, L, E, P, B+.	FEATURES A-Circuit Voltage Set Point 14.60 V Soft Start 18 % LRC 2.5 Sec Field Shorted Circuit Protection Sense Open Indication Under/Over Voltage Indication REFERENCES..  Diagram showing terminal connections: S, L, IG, E, P, B+.	FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25% LRC 3 Sec Self Exciting Function LIN1.3 class11 LIN Regulator REFERENCES.. OEM NO LR1180-856/857  Diagram showing terminal connections: LIN, E, B+, P1, P2.

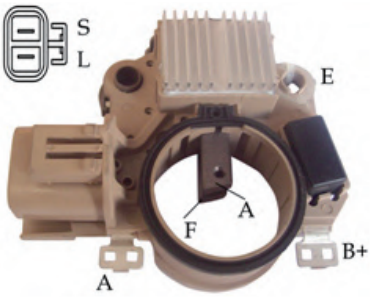

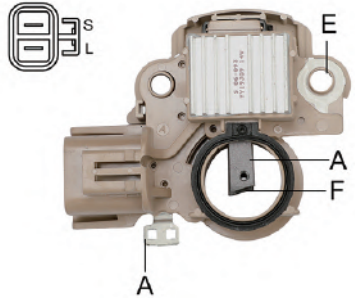



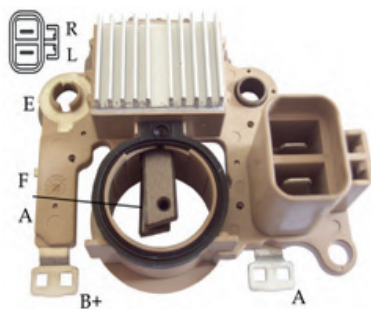
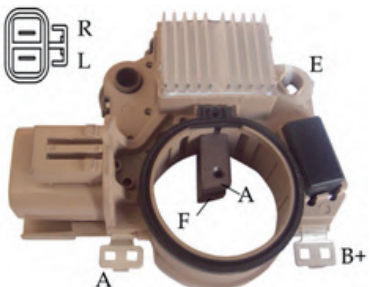
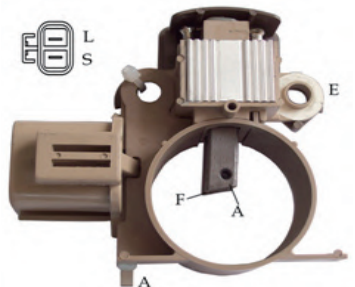
334-060/06-039 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO A866T01070 A866X01070 CARGO 131518 LESTER 12312 12641 12742 20058 WAI 35-8328 MOBILETRON VR-H2009-17 TRANSPO IM215 FIT UNIT A003T76072 A004T57472 	360-010/06-001 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. OEM NO A866X04870 A866X04871 CARGO 131524 LESTER 12481 13259 13292 13434 MOBILETRON VR-H2009-4A/4H TRANSPO IM216HD 	360-020/06-002 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X25572 MD618735 CARGO 137075 LESTER 12643 12649 12661 12663 FIT UNIT JA1183IR TRANSPO IM847 
360-030/06-004 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X05272 A866X09071 CARGO 131523 LESTER 12303 13197 13238 13249 WAI 35-8302 MOBILETRON VR-H2009-6H TRANSPO MD102084 MD102085 	360-050/06-006 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X23182 A866X22272 CARGO 136649/230885 LESTER 12311 13430 13439 13450 WAI 35-8339 MOBILETRON VR-H2009-38 TRANSPO IM222 	360-070/06-008 FEATURES A-Circuit Voltage Set Point 28.70V REFERENCES.. OEM NO ME701399 CARGO 12435 12602 12604 LESTER A003TN5288 A003TN5883 FIT UNIT VR-H2009-80B TRANSPO IM846 
360-100/06-013 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X09171 MD611481 CARGO 131471 LESTER 12229 12619 12627 12642 WAI 35-8355 MOBILETRON VR-H2009-28 TRANSPO IM281 FIT UNIT A002T01384 A002T01783 	360-101 FEATURES A-Circuit Voltage Set Point 14.40 V REFERENCES.. OEM NO 37300-4X200 	360-110/06-014 FEATURES A-Circuit Voltage Set Point 14.40V REFERENCES.. OEM NO A866X40371 CARGO 230985 LESTER 21381 MOBILETRON VR-H2009-82 TRANSPO IM757 FIT UNIT A003TN1791 CA1317IR 

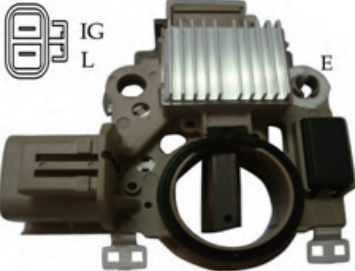



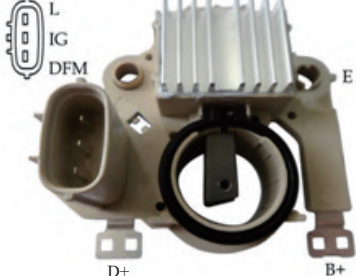




360-130/06-016 FEATURES A-Circuit Voltage Set Point 14.50V Field Shorted Circuit Protection Over Voltage Indication Without Trio Diode Application REFERENCES.. TRANSPO AZTB6481 FIT UNIT CA1652IR 	360-150/06-028 FEATURES A-Circuit Voltage Set Point 14.40V REFERENCES.. OEM NO 37370-02500 37370-21330 CARGO 234286 	360-160/06-029 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 37300-42000 37340-42540 23071 23074 MOBILETRON VR-MD01 TRANSPO IY422 FIT UNIT 37300-42621 37300-47451 
360-170/06-030 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X00170 A866X17072 135032 LESTER VR-H2009-33 MOBILETRON IM280 TRANSPO A2T18177 A2T18277 FIT UNIT 135032 CARGO 35-8324 WAI 	360-180/06-031 FEATURES A-Circuit Voltage Set Point 14.40V Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO A002T33493A A002T33593A 13478 13723 LESTER VR-H2009-45 MOBILETRON IM292 TRANSPO A002T33593 A002T33593A FIT UNIT 137182 CARGO 35-8343 WAI 	360-190/06-032 FEATURES A-Circuit Voltage Set Point 14.40V Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO A866X20472 A866X20972 11102 13227 13350 13432 LESTER VR-H2009-22 MOBILETRON IM830 TRANSPO A002T33191 A003T08491 FIT UNIT 135233 CARGO 35-8333 WAI 
360-200/06-034 FEATURES P D Terminals REFERENCES.. OEM NO A866X35472 11008 11025 11174 13718 LESTER VR-H2009-95 MOBILETRON IM345 TRANSPO A002TB0091 A003TG1291 FIT UNIT 138872 CARGO 	360-210/06-035 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% LRC 5 Sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO A866X36272 A866X42672 13478 13723 21264 LESTER VR-H2009-118 MOBILETRON IM362 TRANSPO A002T33593 A002T82491 FIT UNIT 230043 CARGO 	360-220/06-036 FEATURES A-Circuit Voltage Set Point 14.40V REFERENCES.. OEM NO A866X26172 A866X23172 11988 12138 13218 12363 LESTER VR-H2009-63 MOBILETRON IM290 TRANSPO A1T06391 A1T06672 FIT UNIT 138309 CARGO 










360-230/06-037 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% LRC 5 Sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO A86634272 A866X35072 LESTER 11096 13479 22665 23028 MOBILETRON VR-H2009-115 TRANSPO IM342 FIT UNIT A2TA7591 A2TA7691 WAI 35-8322 	360-240/06-041 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X14570 A866X14572 LESTER 13251 13335 MOBILETRON VR-H2009-103 TRANSPO IM278 CARGO 134088 WAI 35-8326 	360-250/06-043 FEATURES A-Circuit Voltage Set Point 14.40V REFERENCES.. CARGO 235205 
360-270/06-046 FEATURES A-Circuit Voltage Set Point 14.80V REFERENCES.. CARGO VR-H2009-58 FIT UNIT A2TA0591 A2TA0592 	360-280/06-050 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% LRC 5 Sec Field Shorted Circuit Protection Sense Open Indication Under/Over Voltage Indication REFERENCES.. OEM NO A866X35672 A866X37272 LESTER 11004 11051 11052 20066 MOBILETRON VR-H2009-99 TRANSPO IM476 FIT UNIT A2T05892C A2T33191A CARGO 231510 	360-290/06-051 FEATURES P D Terminals REFERENCES.. OEM NO A866X46572 GY0118W70 LESTER 11005 13883 13996 MOBILETRON VR-H2009-100 TRANSPO IM465 FIT UNIT A3TG0081 A34TG0091 CARGO 235665 
360-300/06-053 FEATURES A-Circuit Voltage Set Point 14.50V L Terminal Drive Choke REFERENCES.. OEM NO A866X17470 A866X21472 LESTER 13273 13286 13293 21340 MOBILETRON VR-H2009-15 TRANSPO IM284 FIT UNIT A2T14694 A2T18792 CARGO 135030 	360-301/06-0531 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X15171 A866X17471 LESTER 13230 13298 MOBILETRON VR-H2009-15 TRANSPO IM271 FIT UNIT A3T00491 A3T00896 	360-320/06-056 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. HYUNDAI NO 373704A110 VALEO 235551 CARGO 235551 238202 LESTER 22862 23203 23790 23791 MOBILETRO VR-H2009-128 WAI/TRANSPO 1Y727 


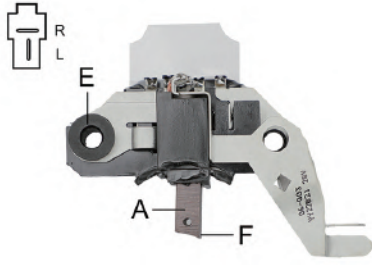





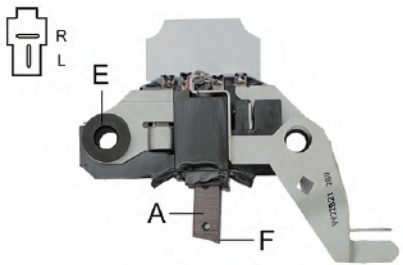

360-340/06-059 FEATURES A-Circuit Voltage Set Point 28.65V REFERENCES.. 	360-350/06-060 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. FIT UNIT JFZ182 	360-390/06-065 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. CARGO 231425 LESTER 13785 13948 MOBILETRON VR-MD07 TRANSPON IY094 FIT UNIT AB170094 AB180140 
360-400/06-066 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 37370-22600 TA500-C09001 CARGO 234654 LESTER 13839 MOBILETRON VR-MD06 TRANSPON IY028 FIT UNIT AB180128 	360-410/06-067 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO TA500C02401 CARGO 138204 LESTER 13702 MOBILETRON VR-H2009-86 TRANSPON IY058 FIT UNIT 37300-22200, AB190058 	360-420/06-072 FEATURES A-Circuit Voltage Set Point 28.65V REFERENCES.. MANDO NO TA500C07401D HYUNDAI NO 37370-45100 PSH NO 052.001.083.120, 052.001.083.126 AS NO ARE5131 MOBILETRON VR-H2009-191B WAI/TRANSPON IY713 VOLTAG ARA1713 HYUNDAI UNIT 37300-45100, 37300-45101 
360-430/06-073 FEATURES A-Circuit Voltage Set Point 28.65V REFERENCES.. OEM NO 37300-9300 AC270542 	360-440/06-074 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. OEM NO A866X50372 RES14278 CARGO 331005 235843 LESTER 22169 MOBILETRON VR-H2009-102 TRANSPON IM503 FIT UNIT A5TA7792 	360-450/06-075 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. FIT UNIT A3TB1999 A3TA6098A 

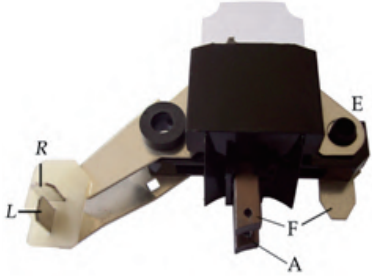
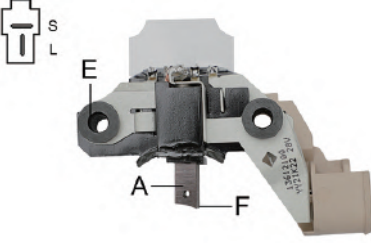



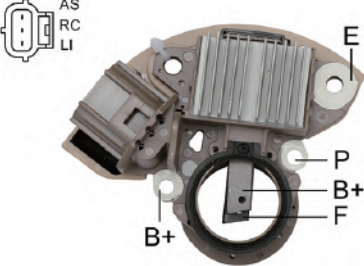
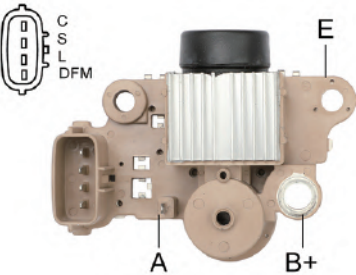


360-480/06-078 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. LESTER 14436 TRANSPO IY510 FIT UNIT 37300-32510 37300-32511 	360-490/06-080 FEATURES A-Circuit Voltage Set Point 14.80V REFERENCES.. 	360-500/06-081 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 37370-47301 MOBILETRON VR-MD12 TRANSPO IY702 FIT UNIT 37300-42353 37300-42355 
360-510/06-082 FEATURES A-Circuit Voltage Set Point 28.65V REFERENCES.. CQ NO CQ1010338 CARGO 234304 MITSUBISHI 283 A866X28372 ME701399 LESTER 12602 12604 20102 20103 MOBILETRON VR-H2009-80B TRANSPO IM846 	360-520/06-084 FEATURES A-Circuit Voltage Set Point 28.60V REFERENCES.. 	360-530/06-085 FEATURES A-Circuit Voltage Set Point 14.40V Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO A866X27572 ME701363 CARGO 139110 LESTER 12626 12635 12636 1263 MOBILETRON VR-H2009-79 TRANSPO IM854 FIT UNIT JA1376IR 
360-540/06-086 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO 28241239 FIT UNIT A003TN5082 	360-550/06-087 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. MOBILETRON VR-H2009-153 TRANSPO IM518 FIT UNIT A3TR0091 A3TR0091ZT 	360-560/06-088 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866T09780 A866T09782 LESTER 13249 13289 MOBILETRON VR-H2009-78 TRANSPO IM831 FIT UNIT 37300-33010 37300-33013 

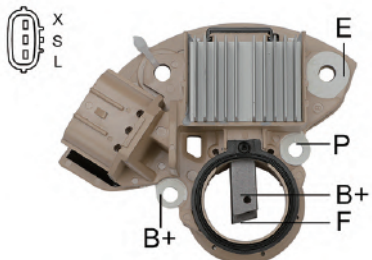


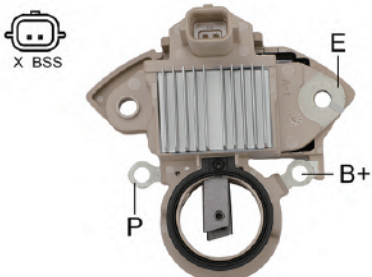

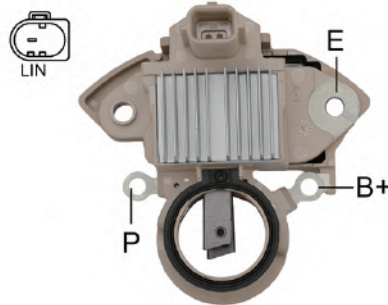
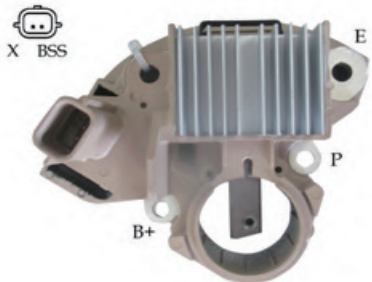

360-580/06-090 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X41072 CARGO 235541 	360-590/06-092 FEATURES A-Circuit Voltage Set Point 14.40V Soft Start 30% LRC 5 Sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO A866X43372 235102 CARGO 11409 11556 13820 13889 LESTER VR-H2009-107 MOBILETRON IM848 TRANSPO A2TB2891 A2TB2991 FIT UNIT 	360-600/06-093 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO TA500C02001A TA500C02701 13523 13730 13731 LESTER VR-H2009-116 MOBILETRON IY794 TRANSPO AB170036 AB170066 FIT UNIT 
360-620/06-096 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% Field, Lamp Shorted Circuit Protection Sense Loss Indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO A866X34172 138340 CARGO 11028 11029 11053 11055 LESTER VR-H2009-70A MOBILETRON IM341 TRANSPO A2TA4991 A2TA5192 FIT UNIT 	360-630/06-097 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field, Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO A866X49872 235450 CARGO 22926 22927 LESTER VR-H2009-105 MOBILETRON IM498 TRANSPO A1TA3391 A1TA3392 FIT UNIT 	360-640/06-098 FEATURES A-Circuit Voltage Set Point 28.50V Soft Start 30% Field, Lamp Shorted Circuit Protection IG Open Indication Sense Loss Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO 576 6100713F CARGO 20921 LESTER VR-H2009-125B MOBILETRON IM691 TRANSPO A4TA8191 FIT UNIT 
360-650/06-102 FEATURES A-Circuit Voltage Set Point 28.70V REFERENCES.. LESTER 20059 FIT UNIT ME108147 A003TA8199 	360-660/06-103 FEATURES A-Circuit Voltage Set Point 14.80V REFERENCES.. 	360-680/06-105 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. 









360-690/06-106 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO ME192607 A3TN5188 	360-700/06-108 FEATURES A-Circuit Voltage Set Point 14.5V Soft start 30% LRC 5 sec DFM function REFERENCES.. OEM NO A866X48782 31150-PLC-004 13893 13966 MOBILETRON VR-H2009-94 TRANSPON IM851 FIT UNIT A2TB7591 A5TA7091 	360-710/06-109 FEATURES A-Circuit Voltage Set Point 14.5V Soft start 30% LRC 5 sec DFM function REFERENCES.. OEM NO A866X55852 31150-RNA-A01 11175 11176 MOBILETRON VR-H2009-113 TRANSPON IM558 FIT UNIT A2TC1391 A2TC1391ZC 
360-720/06-110 FEATURES A-Circuit Voltage Set Point 14.50V Sense Open Indication Under/Over Voltage Indication REFERENCES.. DIXIE NO 3543-4312 ERA NO 215563 GAUSS NO GA801 MITSUBISHI NO 222 231 A866X22272 FORD NO F3XY-10316-A CARGO NO 230885 235328 	360-730/06-114 FEATURES A-Circuit Voltage Set Point 14.70V Under Voltage Indication REFERENCES.. OEM NO A886X31882 13330 MOBILETRON VR-H2009-62 TRANSPON IM318 FIT UNIT A5TA1191 A5TA1191ZC 	360-740/06-115 FEATURES A-Circuit Voltage Set Point 28.50V Soft Start 30% IG/Sense Open Indication L Terminal Drives Choke Under/ Over Voltage Indication REFERENCES.. OEM NO 5343228C LESTER 20289 20366 20406 20923 MOBILETRON VR-H2009-135B TRANSPON IM383 FIT UNIT A4TA0591 A4TA0592 CARGO 238949 PRESTOLITE 861286 MITSUBISHI A86653472 
360-750/06-116 FEATURES A-Circuit Voltage Set Point 14.70V Soft Start 30% LRC 5 sec Field Lamp Shorted Circuit Protection Under/Over Voltage Indication REFERENCES.. OEM NO A866X42572 13780 13781 MOBILETRON VR-H2009-90 TRANSPON IM381 FIT UNIT A5TA3891 A5TA4291 	360-760/06-117 FEATURES A-Circuit Voltage Set Point 14.50V Under Voltage Indication DFM function REFERENCES.. OEM NO 31150-P2E-A01 13469 13762 MOBILETRON VR-H2009-71 TRANSPON IM850 FIT UNIT A5TA0991 A5TA0991ZC CARGO 230260 	360-770/06-118 FEATURES A-Circuit Voltage Set Point 14.50V For use on: Ford Probe, Mazda REFERENCES.. OEM NO A866X12770 A866X12772 13196 14905 MOBILETRON VR-H2009-7H TRANSPON IM265 FIT UNIT A2T05772 A2T05772X CARGO 132101 WAI 35-8308 

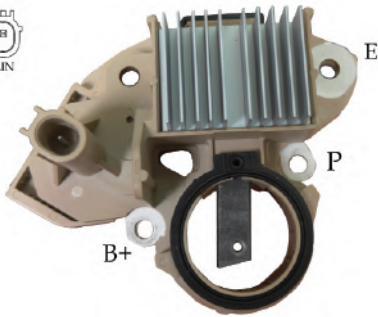




360-780/06-119 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X11870 A866X11872 13213 13416 MOBILETRON VR-H2009-14N VR-H2009--92 TRANSP IM275 FIT UNIT A1T03191 A1T03191ZC 	360-790/06-120 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Lamp Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. MOILETRON VR-H2009-147 SUZUKI 32500-61J00 MITSUBISHI 548 	360-800/06-121B0 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS-3 ID=179 Class 9 BSS Regulator REFERENCES.. OEM NO 5507508K 
360-801 FEATURES A-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % Self Exciting Function BSS 3 ID=65 BSS Regulator REFERENCES.. FIT UNITS A3TG5281 LESTER 20391 	360-810/06-123 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 Sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. MITSUBISHI NO A866X54472 EGI NO 80MIT-230 LESTER 20370 PSH NO 052.001.081.130 052.001.081.136 AS NO ARE5114 VOLTAG ARM3447 MITSUBISHI UNIT A2TG1081ZT 	360-850/06-131 FEATURES A-Circuit Voltage Set Point 14.50V Field Shorted Circuit Protection Over Voltage Indication Without Trio Diode Application REFERENCES.. FIT UNIT A2TC0391 
360-861 FEATURES P D Terminals REFERENCES.. OEM NO A00002TG1391ZC A003TB6581 LESTER 11329 11578 11836 23945 MOBILETRON VR-H2009-126 TRANSP NO IM581 	360-870/06-134 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X23772 MOBILETRON VR-H2009-44 TRANSP IM834 FIT UNIT A5T07091ZC A5T07092ZC 	360-920/06-139 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 Sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. MITSUBISHI NO 566, 6268807U, A866X56672 EGI NO 80MIT-258 GAUSS NO GA427 CARGO NO 332861 LESTER 11413, 23917 PSH NO 052.000.729.130, 052.000.729.136 AS NO ARE5103 MOBILETRON VR-H2009-122 

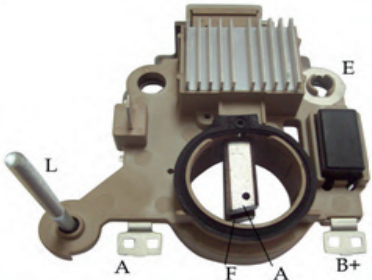
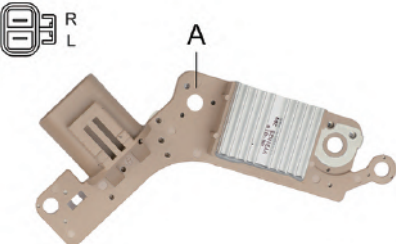
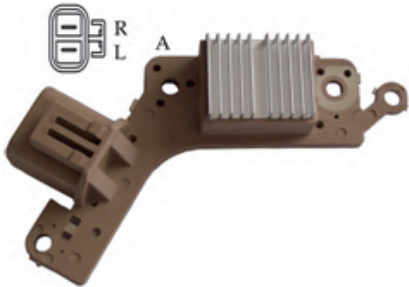

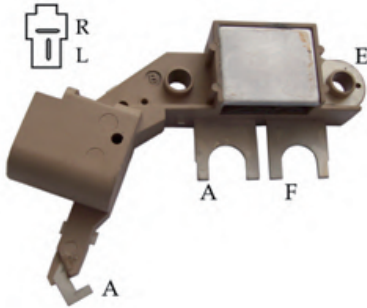
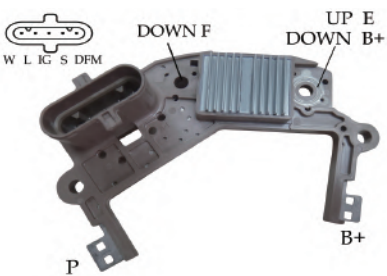
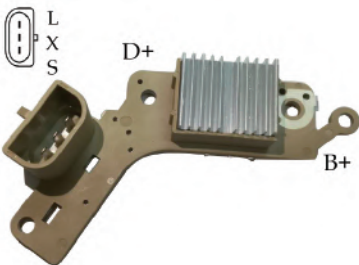
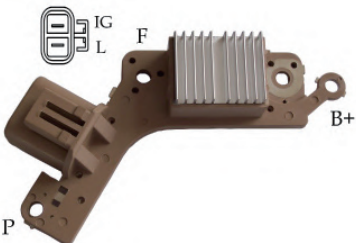

360-930/06-140 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X20572 A866X24072 MOBILETRON VR-H2009-129 	361-010/06-003 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO A866X04872 A866X05471 LESTER 12431 MOBILETRON VR-H2009-12 TRANSP0 IM213 FIT UNIT A5T70383 CARGO 131517 WAI 35-8301 	361-030/06-009 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO A866X03070 A866X1827 LESTER 12139 12631 12632 12633 MOBILETRON VR-H2009-18 TRANSP0 IM205 FIT UNIT A1T32084 A2T40484 CARGO 131290 WAI 35-8304 
361-050/06-011 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO A866X06870 ME700635 LESTER 137396 MOBILETRON VR-H2009-47 TRANSP0 IM212 FIT UNIT A2T72186 A2T72189 WAI 12308 12314 12317 12551 	361-070/06-018 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO A866T08570 ME700556 LESTER 12228 20815 MOBILETRON VR-H2009-46 TRANSP0 IM208 FIT UNIT A2T32386 A2T32583 WAI 35-8344 	361-090/06-020 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO A866T00470 A866T00670 LESTER 12078 14267 14268 14307 MOBILETRON VR-H2009 TRANSP0 IM204 FIT UNIT A1T23377 A1T25077 WAI 35-8300 CARGO 130835 
361-130/06-027 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO A866T02070 LESTER 12309 MOBILETRON VR-H2009-21 TRANSP0 IM203 FIT UNIT A1T70283 A1T70783 CARGO 137397 	361-150/06-044 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO A866T06570 LESTER 12732 MOBILETRON VR-H2009-48 TRANSP0 IM207 FIT UNIT A00522578 A5T23083 WAI 35-8360 	361-170/06-049 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO Mazda 8574-24-520; Nissan, Infiniti 23215-P3017, 23215-W7110; 00870, 02270, 02970 CARGO 131289 LESTER 12079 14231 14303 14478 14982 WAI NO IM225 MOBILETRON VR-H2009-3 LUCAS 21511095 21511116 UCJ207 


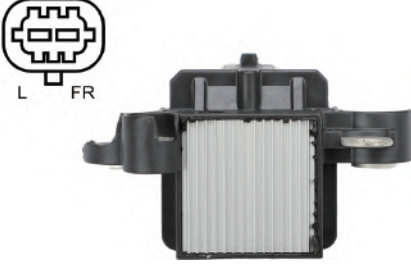
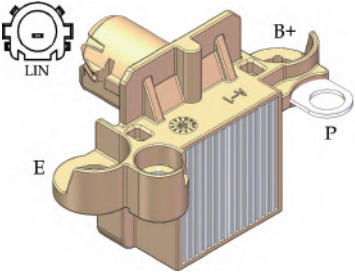
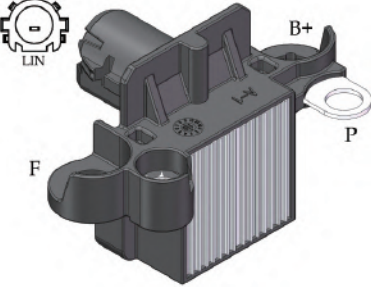
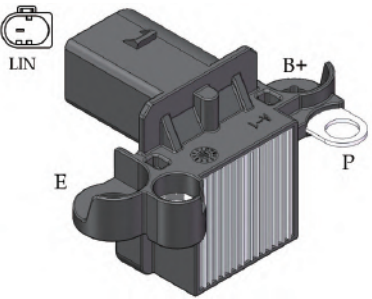
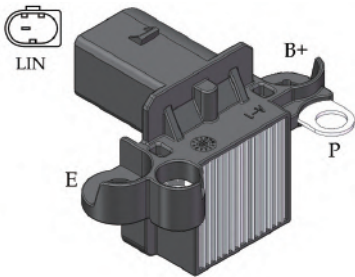
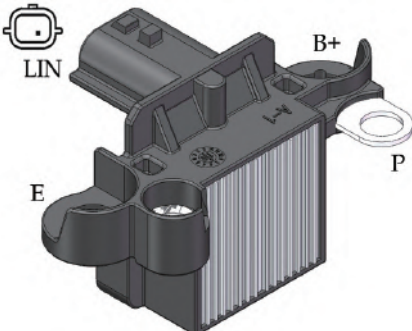

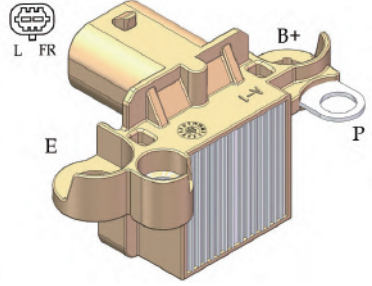
361-190/06-064 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. 	361-210 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. 	361-220 FEATURES A-Circuit Voltage Set Point 14.40 V Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO Mando 234326 WAI NO IM847 BOSCH 0 986 049 930 F042320066 VALEO 437147 437822 
361-230 FEATURES A-Circuit Voltage Set Point 14.60 V REFERENCES.. 	362-010/06-100 FEATURES Works with PCM Traditional test method will immediately damage P-D REFERENCES.. OEM NO A866X50572 LESTER 11006 11007 11168 11169 MOBILETRON VR-H2009-114 TRANSPO IM505 FIT UNIT A2TJ0391 A2TJ0791 	362-020/06-101 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. OEM NO A866T52970 LESTER 11026 11172 11173 11543 MOBILETRON VR-H2009-98 TRANSPO IM529 FIT UNIT A3TJ0891 A3TJ0891ZC 
362-030/06-111 FEATURES A -Circuit Voltage Set Point 14.50V DFM function REFERENCES.. OEM NO TA500C07101 LESTER 11001 13783 MOBILETRON VR-H2009-106 TRANSPO IY126 FIT UNIT AB195125 AB195126 	362-040/06-112 FEATURES A -Circuit Voltage Set Point 14.50V DFM function REFERENCES.. LESTER 13967 TRANSPO IY146 FIT UNIT 37300-39600 AB112145 	362-050/06-122 FEATURES A-Circuit Voltage Set Point 14.50V Sense Open Indication Under/ Over Voltage Indication DFM Function REFERENCES.. OEM NO A866X28572 MD618957 LESTER 13582 13585 13585 13586 13587 MOBILETRON VR-H2009-73 TRANSPO IM845 FIT UNIT A2T80491 A2T82791 WAI 35-8346 

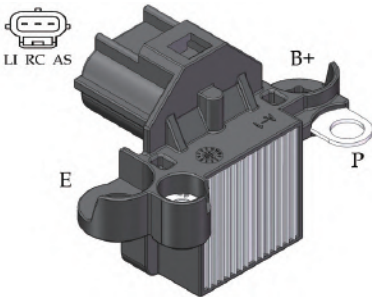

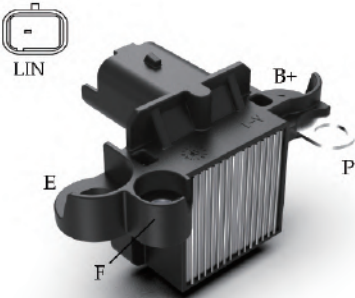
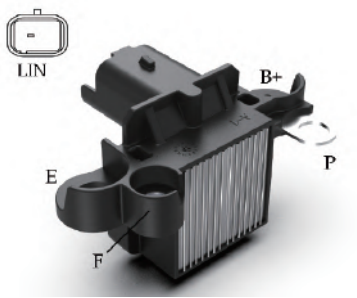


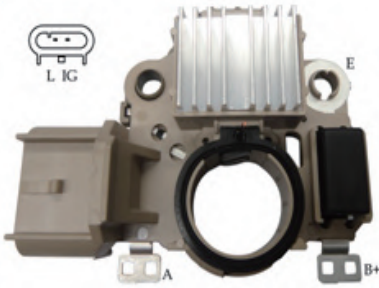

362-060/06-124 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. OEM NO 6224Y12N 6224Z04A 11271 11272 11411 11542 MOBILETRON VR-H2009-140 TRANSPO IM622 FIT UNIT A2TX0191 A3TX0091 	362-070/06-125 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 Sec Field Shorted Circuit Protection Sense Open Indication Under/Over Voltage Indication REFERENCES.. OEM NO 5648111D 11343 11344 MOBILETRON VR-H2009-148 TRANSPO IM564 FIT UNIT A2TJ0281 	362-140 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 12.5% LRC 8 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO A5TL0581ZD A5TL0581ZC A5TL0581E 70064522 70063328 70064424 7703-3153 
362-150 FEATURES A-Circuit Voltage Set Point 13.80V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 69563Y04 	362-160 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. GAUSS NO GA762 335313 21395 MOBILETRON VR-H2009-189 WAI/TRANSPO IM549 	362-170 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 12.5% LRC 8 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 6674402F 6674617L 
362-190 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 12.5% LRC 8 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 71464522 	362-200 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 5514509D 5518311H MOBILETRON VR-H2009-164 FIT UNIT A004TJ0282 	362-210 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 25 % Sense Open Indication REFERENCES.. FIT UNIT A2TJ1282ZE A2TJ1282 


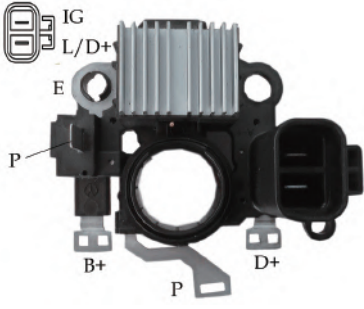







362-260 FEATURES B-Circuit Voltage Set point 14.50 V Soft Start 12.5% LRC 3Sec Field Shorted Circuit Protection Self Exciting Function LIN 2.1 class17 LIN Regulator REFERENCES.. OEM NO A3TX1781 71.764Y05 20535 LESTER  	362-280 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 25% LRC 5 Sec Field Lamp Shorted Circuit Protection Sense Loss Indication Under / Over Voltage Indication REFERENCES.. FIT UNIT A2TX1981ZT A002TL0091 23700-AA700 23700-AA701 11579 LESTER MOBILETRON VR-H2009-210  	362-290 FEATURES PD Regulator REFERENCES.. LESTER 20288 20891 MOBILETRON VR-H2009-209 TRANSPO IM630 FIT UNIT A002TX3081 A005TL0491  
362-300 FEATURES A-Circuit RVC=0 Vset=13.80V RC=70% Vset=14.45V Soft Start 31.25 % LRC 3 sec DFM function RVC Regulator REFERENCES.. OEM NO A2TX1381 6521Y24H 11644 LESTER MOBILETRON VR-H2009-188  	362-320 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 18% Field Lamp Shorted Circuit Protection Under / Over Voltage Indication DFM Function REFERENCES..  	362-330 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 18% Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO A2TL0091A 23700-AA700 23700-AA701 LESTER 11579  
362-340 FEATURES A-Circuit Voltage Set Point 13.80V Soft Start 12.5 %,LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO EB3T-10300-EA  	362-350 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO A002TX0481 MOBILETRON VR-H2009-189  	362-360 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 18 % Sense Open Indication Under / Over Voltage Indication REFERENCES.. OEM NO A003TJ3591 A3TJ3591 MOBILETRON VR-H2009-180  





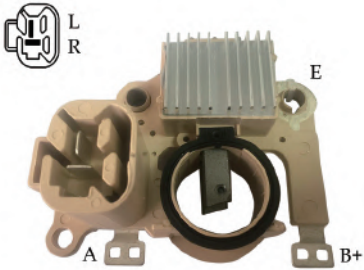




362-370 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 12.5 % LRC 8 Sec Self Exciting Function LIN Regulator Class03 LIN2.1 REFERENCES.. OEM NO A5TJ0391ZT  	362-380 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 25% Field Lamp Shorted Circuit Protection Sense Loss Indication Under / Over Voltage Indication REFERENCES.. OEM NO A2TX0581/AMT0089ND-600  	362-400 FEATURES A-Circuit Voltage Set Point 14.50 V Field Lamp Shorted Circuit Protection Sense Loss Indication C Terminal Regulator Self Exciting Function REFERENCES.. OEM NO A2TX0881A MOBILETRON VR-H2009-173  
364-010/06-068 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO KIA 62124520  	364-020/06-069 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO KIA 055318300B CARGO 235035  	364-030/06-070 FEATURES A-Circuit Voltage Set Point 14.80V REFERENCES.. OEM NO 02121-8207 02121-9012 MOBILETRON VR-K01 TRANSP0 PG101  
364-040/06-079 FEATURES A-Circuit Voltage Set Point 28.60V REFERENCES.. OEM NO KIA K61A-24-520 CARGO 139469 TRANSP0 PG133 MOBILETRON VR-K01B  	365-010/06-095 FEATURES A-Circuit Voltage Set Point 28.35V REFERENCES.. FIT UNIT A0037A859 	365-020/06-107 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 809163 811883 LESTER 12174 12176 12177 12423 MOBILETRON VR-H2009-75 TRANSP0 IM288 FIT UNIT A000B0331 A000B0341 CARGO 136742 










365-030/06-113 FEATURES A-Circuit Voltage Set Point 28.35V REFERENCES.. FIT UNIT A4TR5188 A4TR5191 MOBILETRON VR-H2009-151B 	366-010/06-019 FEATURES A-Circuit Voltage Set Point 28.6V REFERENCES.. OEM NO A866X26070 A866X26072 LESTER 12310 12555 12557 12603 MOBILETRON VR-H2009-77 TRANSPON IM843 FIT UNIT A4T40286 A4T40287 	366-020/06-026 FEATURES A-Circuit Voltage Set Point 14.80 V REFERENCES.. 
366-030/06-052 FEATURES A-Circuit Voltage Set Point 28.7V REFERENCES.. OEM NO A866X08871 A866X19972 LESTER 12315 12316 12741 MOBILETRON VR-H2009-69B TRANSPON IM286 FIT UNIT A4T58285 A4T58289 	366-040/06-055 FEATURES A-Circuit Voltage Set Point 14.8V REFERENCES.. OEM NO A866X08971 A866X23972 LESTER VR-H2009-69 TRANSPON IM294 	366-060 FEATURES A-Circuit Voltage Set Point 28.50 V Soft Start 18 % DFM Function REFERENCES.. LESTER 20257 MOBILETRON VR-H2009-197B FIT UNIT A866X55572 A9TU6499 A9TU5991A 
366-070 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A866X30470 A008TU0091 LESTER 12075 TRANSPON IM840 	366-080 FEATURES A-Circuit Voltage Set Point 28.50 V Soft Start 18 % Field Shorted Circuit Protection LRC 2.5 sec Field, Lamp Shorted Circuit Protection Under/Over Voltage Indiction REFERENCES.. OEM NO A9TU5795 	367-010 FEATURES B-Circuit Voltage Set Point 14.40 V Soft Start 12.5 % LRC 7 sec Self Exciting Function LIN2 class03 LIN Regulator REFERENCES.. OEM NO 7331 3Y19G1 A5TZ0091 A5TZ0291ZC 

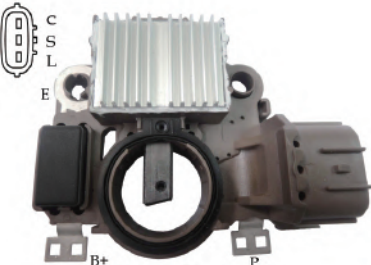
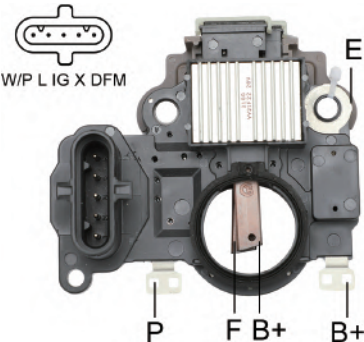




367-020 FEATURES B-Circuit Voltage Set Point 14.40 V Soft Start 12.5 % LRC 7 sec Self Exciting Function LIN2 class03 LIN Regulator REFERENCES.. OEM NO 7331 5X19R1 5Y02T1/5X29S1 	367-030 FEATURES B-Circuit RVC=0 Vset=13.80V RVC=70% Vset=14.45V Soft Star 22% LRC 2.5 Sec DFM Function RVC Regulator REFERENCES.. OEM NO A005TV0181 	367-040 FEATURES B-Circuit Voltage Set Point 14.30V Soft Star 12.5% LRC 5 Sec Self Exciting Function LIN2 class00 LIN Regulator REFERENCES.. OEM NO 23700AA920/A5TV0081/4531 
367-050 FEATURES B-Circuit Voltage Set Point 14.30V Soft Star 12.5% LRC 5 Sec Self Exciting Function LIN2 class00 LIN Regulator REFERENCES.. OEM NO A5TV0081A 	367-060 FEATURES B-Circuit Voltage Set Point 14.10V Soft Star 15% LRC 5 Sec Self Exciting Function LIN2 class00 LIN Regulator REFERENCES.. OEM NO A5TE0581ZD 	367-070 FEATURES B-Circuit Voltage Set Point 14.30V Soft Star 12.5% LRC 5 Sec Self Exciting Function LIN2 class00 LIN Regulator REFERENCES.. OEM NO A2TV1281ZD 
367-080 FEATURES B-Circuit Voltage Set Point 14.30V Soft Star 15% LRC 5 Sec Self Exciting Function LIN2 class20 LIN Regulator ID:165 REFERENCES.. OEM NO A5TE0081ZD 	367-090 FEATURES B-Circuit Voltage Set Point 14.40V Soft Star 12.5% LRC 7 Sec Self Exciting Function LIN2 class03 LIN Regulator REFERENCES.. OEM NO 7622 	367-100 FEATURES B-Circuit RVC=0 Vset=13.80V RVC=70% Vset=14.45V Soft Star 22% LRC 2.5 Sec DFM Function RVC Regulator REFERENCES.. OEM NO A-GX504-03 









367-110 FEATURES B-Circuit RC=0 Vset=13.5V RC=55% Vset=14.25V PCM Regulator REFERENCES.. 	367-120 FEATURES B-Circuit Voltage Set Point 14.30V Soft Star 12.5% LRC 5 Sec Self Exciting Function LIN2 class19 LIN Regulator REFERENCES.. OEM NO A2TE0081ZE 	367-130 FEATURES B-Circuit Voltage Set Point 14.30V Soft Star 25% LRC 5 Sec Self Exciting Function LIN2 class20 LIN Regulator REFERENCES.. OEM NO A005TE0481/23100-5FN6 
367-140 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5% LRC 7 Sec Self Exciting Function LIN1.3 Class 03 LIN Regulator REFERENCES.. OEM NO A002TV0781 	367-150 FEATURES B-Circuit Voltage Set Point 14.40 V Soft Start 12.5% LRC 7 Sec Self Exciting Function LIN1.3 Class 03 LIN Regulator REFERENCES.. OEM NO A3TV0281AE A3TV0281ZE 	368-010 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. OEM NO 7061 3X03A1 7067 2Z03T1 
368-020 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. OEM NO 17501 5X08K1 	360-C20 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A5TB1191ZT 	360-FLO FEATURES A-Circuit Voltage Set Point 28.60 V REFERENCES.. OEM NO A3TA9091 LESTER 23997 






360-D10 FEATURES A-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. TRANSPO 5743524T 	360-D80 FEATURES A-Circuit Voltage Set Point 28.70V REFERENCES.. FIT UNIT A3TA8199 	360-DH0 FEATURES A-Circuit RVC=0 Vset=13.80v RC=70% Vset=14.45v Soft Start 31 % DFM Function RVC Regulator REFERENCES.. OEM NO A3TG1591 A3TG4191 A3TG4091 A3TG4181 11414 11420 11421 VR-H2009-172 IM527 
360-DN0 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 12.5% LRC 8 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 6944509S 	360-DP0 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 18% Sense Open Indication Under / Over Voltage Indication REFERENCES.. OEM NO A3TB1891 A866X47272 11058 11225 11236 13888 VR-H2009-109 IM472 FIT UNIT A2TB3091 A2TB5391 	360-DR0 FEATURES A-Circuit Voltage Set Point 14.80 V L Terminal Drives Choke REFERENCES.. MOBILETRON VR-H2009-64 TRANSPO IM293 FIT UNIT A866X24572 A866X28475 
360-DS0 FEATURES A-Circuit Voltage Set Point 14.70 V REFERENCES.. OEM NO A866X27872 A866X28472 LESTER 12077 12432 MOBILETRON VR-H2009-64A TRANSPO IM295 	360-DT0 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 Sec Sense Open Indication REFERENCES.. LESTER 12430 13473 13692 13821 MOBILETRON VR-H2009-108 TRANSPO IM369 FIT UNIT A3TA5691 23100-7B000 	360-DW0 FEATURES A-Circuit Voltage Set Point 14.40 V REFERENCES.. FIT UNIT AMG2F5R6CY/37300-2260 



360-DY0 FEATURES A-Circuit Voltage Set Point 14.70V Soft Start 18 % Field Shorted Circuit Protection Under/Over Voltage Indication REFERENCES.. FIT UNIT A7TA3577B 	360-E10 FEATURES A-Circuit Voltage Set Point 28.30V Soft Start 18% Field Shorted Circuit ProtectionI Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO Same as 06-098 with DFM function 	360-E50 FEATURES A-Circuit Voltage Set Point 14.60 V Soft Start 18 % Field Shorted Circuit Protection Under / Over Voltage Indication REFERENCES.. FIT UNIT A5TA8192 A5TA8192A LESTER 11685N/11685 
360-ED0 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under / Over Voltage Indication REFERENCES.. 	360-EG0 FEATURES A-Circuit Voltage Set Point 28.5V REFERENCES.. OEM NO A2TA8383 LESTER 12730 	360-EJ0 FEATURES A-Circuit Voltage Set Point 14.80 V REFERENCES.. 
360-EM0 FEATURES A-Circuit Voltage Set Point 14.40 V REFERENCES.. MOBILETRON VR-H2009-175 	360-EN0 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5Sec Field Shorted Circuit Protection Sense Open Indication Under / Over Voltage Indication REFERENCES.. OEM NO A866X39172 A866X39183 A866X47172 LESTER 12566 23306 TRANSPO IM826 MOBILETRON VR-H2009-120 	360-EQ0 FEATURES A-Circuit Voltage Set Point 14.50V Soft start 30% LRC 5 sec Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. MITSUBISHI UNIT A7TG0291 







360-ERO	360-ESO	360-ETO
FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 18% Field Lamp Shorted Circuit Protection Under / Over Voltage Indication DFM Function REFERENCES.. MITSUBISHI NO 582, 5828206C, 5828219G HONDA NO 31150-RSH-004 GAUSS NO GA981 CARGO NO 238143 	FEATURES A-Circuit Voltage Set Point 28.65V REFERENCES.. FIT UNIT LS11440 A3TN6786 	FEATURES A-Circuit Voltage Set Point 28.50 V REFERENCES.. OEM NO 5001866377/5010480765 A4TR5091ZT/A4TR5091 MOBILETRON VR-H2009-154BA 
360-EZO	360-F40	360-F70
FEATURES A-Circuit Voltage Set Point 28.50V Soft Star 30% Field Shorted Circuit Protection IG Open Indication Sense Loss Indication Under/OverVoltage Indication DFM Function 2608371 REFERENCES.. OEM NO A4TA8191 	FEATURES A-Circuit Voltage 14.50V REFERENCES.. 	FEATURES A-Circuit Voltage 28.65V REFERENCES.. OEM NO AB250474/AB250474 
360-F80	360-FA0	360-FC0
FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30 % LRC 5 Sec Field Shorted Circuit Protection Under / Over Voltage Indication REFERENCES.. OEM NO A3TA0991A A3TB5391 12645 12646 12647 LESTER MOBILETRON VR-H2009-93 	FEATURES A-Circuit Voltage Set Point 28.50 V REFERENCES.. 	FEATURES work with PWM Tradition test method will immediately damage P-D REFERENCES.. OEM NO A002TN3781 



360-FE0 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 25% Sense Open Indication REFERENCES.. OEM NO A855X54472 A003TG2681 23100-EB310 MOBILETRON VR-H2005-145 	360-FF0 FEATURES A-Circuit Voltage Set Point 28.30 V Soft Start 18 % LRC 2.5 sec Field, Lamp Shorted Circuit Protection Under/Over Voltage Indication DFM function REFERENCES.. OEM NO 861394 	360-FH0 FEATURES A-Circuit Voltage Set Point 28.60 V Field, Lamp Shorted Circuit Protection IG Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO A4TR7191 
360-FJ0 FEATURES A-Circuit Voltage set point 14.70 V REFERENCES.. OEM NO A004T00891 A004T00891C A004T00891D A004T00891E LESTER 22684 	360-FK0 FEATURES A-Circuit Voltage Set Point 28.7V Soft Start 18% Under Voltage Indication Over Voltage Indication L Terminal Drive Choke OEM NO A004TR7291 	360-FG0 FEATURES A-Circuit Voltage Set Point 28.30 V Field, Lamp Shorted Circuit Protection IG Open Indication Sense Open Indication Under Voltage Indication Over Voltage Indication REFERENCES.. CARGO NO 333684 LESTER 20243 20291 20348 
360-CF1 FEATURES A-Circuit Voltage Set Point 28.50±0.3 V Soft Start 30 % Field, Lamp Shorted Circuit Protection IG Open Indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. MOBILETRON VR-H2009-183B LESTER 20835 PRESTOLITE 861298 MITSUBISHI A866X56572 	367-170 FEATURES PD Regulator REFERENCES.. MITSUBISHI A5TZ1191ZD A005TZ1191ZD 	






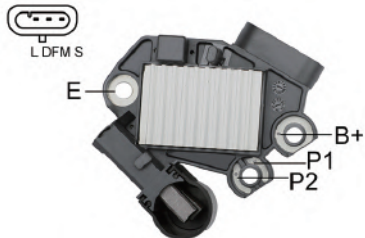
370-010/07-001 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 58120022 79707161 12281 12580 12581 12583 LESTER VR-F119 MOBILETRON IX110 TRANSPO 063306701010 063306721010 FIT UNIT 131283 CARGO 35-9304 WAI 	370-030/07-005 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO 79707441 12026 LESTER VR-F119B MOBILETRON IX111 TRANSPO 63308399 63320025 FIT UNIT 131286 CARGO 	370-040/07-015 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO 83606411 CARGO 138796 
371-010/07-006 FEATURES B-Circuit Voltage Set Point 14.20 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Sense Open Indication Under / Over Voltage Indication DFM Function REFERENCES.. CARGO 131283 LESTER 20514 20598 20600 20601 MOBILETRON VR-F119 WAI/TRANSPO IX110 	371-080/07-014 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Under /Over Voltage Indication Self-exciting REFERENCES.. OEM NO 5812005300 5812005600 20984 21292 23756 23757 LESTER VR-F151A MOBILETRON IX121 TRANSPO 63320200 63320219 FIT UNIT 136432 CARGO 	371-100/07-017 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function Self-exciting REFERENCES.. OEM NO 85563491 LESTER 21663 23113 23169 23810 MOBILETRON VR-F157 TRANSPO IX491 FIT UNIT 63321733 63321740 CARGO 238265 
371-130/07-019 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. OEM NO 085582601010 08558260110 LESTER 20142 21356 21358 21456 MOBILETRON VR-F156 TRANSPO IX131HD FIT UNIT 63321678 63321679 CARGO 230790 	371-140/07-020 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM function Cut-in Speed: 1200rpm Self-exciting REFERENCES.. OEM NO 85552506 LESTER 23806 24006 24068 MOBILETRON VR-F159 TRANSPO IX595 FIT UNIT 63377495 63377532 CARGO 239983 	371-190/07-027 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 sec Under / Over Voltage Indication DFM function Self-exciting REFERENCES.. CARGO 330299 LESTER 23958 24063 24064 24065 MOBILETRON VR-F161 WAI/TRANSPO IX138 

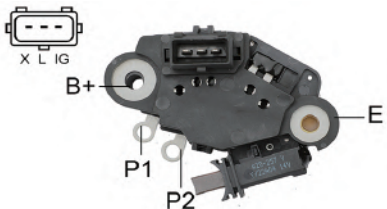
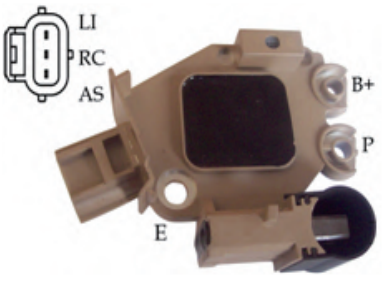
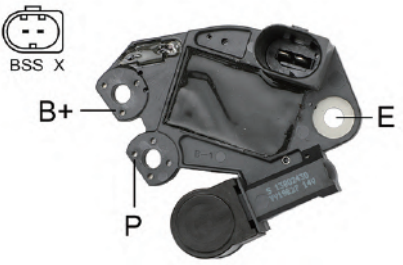
371-220/07-032 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication Self-exciting REFERENCES.. OEM NO 83617181 85561921 LESTER 12094 12582 12735 13726 MOBILETRON VR-F153A TRANSPO IX123 FIT UNIT 63320310 63321240 CARGO 138789 	371-240/07-034 FEATURES A-Circuit Voltage Set Point 14.50V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication Self-exciting REFERENCES.. OEM NO 83615921 RTM150B CARGO 138798 MOBILETRON VR-F150A TRANSPO JA1174IR 	371-270/07-037 FEATURES B-Circuit Voltage Set Point 13.70 V LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. MOBILETRON VR-F756 LESTER 2090 21571 24127 FIT UNIT 1012101670 1012101700 1012101710 ALN3700 ALN3700WA ALN5126 ALN7810 ALN7810DD 
371-430 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 30% LRC 5 Sec Field Shorted Circuit Protection Self Exciting Function REFERENCES.. OEM NO 85563481 MOBILETRON VR-F160 FIT UNIT 63320535 63320545 	371-440 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 %,LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. LESTER 20631 WAI/TRANSPO IX139 CITROEN UNIT 1608066080 1610048280 	371-450 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. OEM NO 102211-8356 8350 8351 102211-8352 8353 8355 LESTER 24013 
371-480 FEATURES A-Circuit Voltage Set Point 14.50 V Soft Start 32% LRC 5 Sec Field Shorted Circuit Protection Under / Over Voltage Indication Self Exciting Function REFERENCES.. 	372-030/07-021 FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication With Trio Diode Application REFERENCES.. OEM NO 54209305 58120056 LESTER 12045 12072 12088 12094 CARGO 136457 TRANSPO IX127 FIT UNIT 54022443B 54022752 	372-040/07-022 FEATURES A-Circuit Voltage Set Point 28.50 V Soft Start 30 % Under Voltage Indication Over Voltage Indication REFERENCES.. 

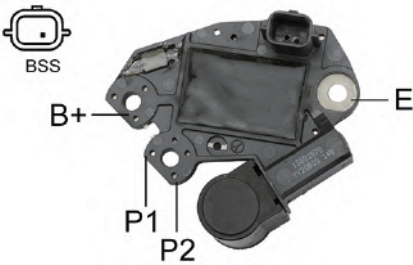

372-050/07-024	372-120	
FEATURES A-Circuit Voltage Set Point 14.60V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over oltage Indication With Trio Diode Application REFERENCES.. OEM NO 28010B 28018A LESTER 12737 13696 13697 13725 CARGO 136457 TRANSPO IX128 FIT UNIT 54022469 54022470 CARGO 136457 WAI 35-9305 	FEATURES A-Circuit Voltage Set Point 28.50 V Soft Start 18% LRC 2.5 sec Under / Over Voltage Indication Self-exciting REFERENCES.. FIT UNIT LS17323 	






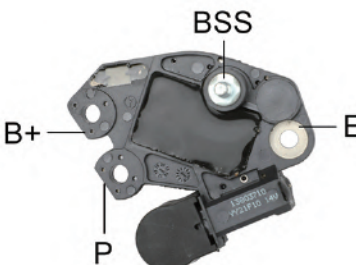

380-010/08-001 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM function with duty cycle limitation Self exciting function REFERENCES.. OEM NO 593529 593993 595993 LESTER 21494 21502 21661 21664 MOBILETRON VR-PR3529 TRANSPO M562 FIT UNIT SG10B022 SG10B023 CARGO 234982 239885 	380-030/08-004 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. OEM NO 593290 593310 593349 LESTER 20245 20246 20247 21198 MOBILETRON VR-PR002H TRANSPO M517 FIT UNIT 2541899 A11V1104 CARGO 139456 230784 230785 	380-040/08-006 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function Self exciting function REFERENCES.. OEM NO 593941 YM1626F LESTER 20245 20246 20247 21198 MOBILETRON VR-PR002H TRANSPO M521 FIT UNIT 2541899 A11V1104 CARGO 139456 230784 230785 VALEO 2714115 
380-050/08-007 FEATURES B-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 2541715 2808323 5931138 LESTER 21297 21298 23214 MOBILETRON VR-PR1669 TRANSPO M514 FIT UNIT 2541678C 2541679 2542388 CARGO 136546 	380-060/08-008 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function Self exciting function REFERENCES.. OEM NO 2542299 593384 593396 CARGO 232962 MOBILETRON VR-PR2299H FIT UNIT SG10B010 SG10B011 	380-070/08-009 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30 %, LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. CARGO 235082 LESTER 21784 21787 23002 23260 MOBILETRON VR-PR6603H WAI/TRANSPO M519 OEM NO VAR519 
380-080/08-010 FEATURES B-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 2521335 2541392 LESTER 11122 12098 12421 12422 MOBILETRON VR-VW010 TRANSPO M511 FIT UNIT AAK5127 AAK5131 CARGO 134475 133988 	380-090/08-012 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Lamp Shorted Circuit Protection Under/Over Voltage Indication DFM Function Self exciting function REFERENCES.. OEM NO 593316 2541952 YM1620 LESTER 20507 20510 21396 21397 MOBILETRON VR-PR1620 TRANSPO M516 FIT UNIT 2541946 2541947 CARGO 139440 139441 	380-100/08-016 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function Self exciting function REFERENCES.. OEM NO 593362 YM1610F CARGO 234533 

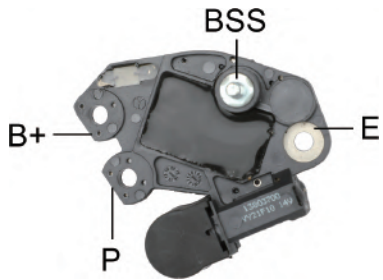
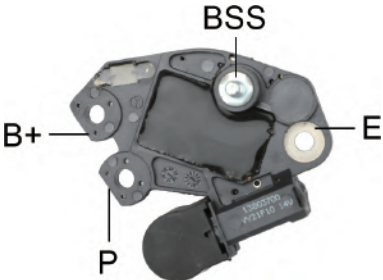


380-110/08-018 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under/ Over Voltage Indication Self exciting DFM Function REFERENCES.. CARGO 233633 LESTER 21493 21660 22929 23114 MOBILETRON VR-V3419 WAI/TRANSPO M564 BOSCH 0 986 049 370 0 986 049 410 	380-120/08-019 FEATURES A-Circuit Voltage Set Point 14.50 V REFERENCES.. CARGO 135434 LESTER 13630 20244 20248 21203 MOBILETRON VR-PR1667 WAI/TRANSPO M513HD OEM NO VAR513 	380-130/08-020 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. CARGO 234115 LESTER 20842 22795 22796 23325 MOBILETRON VR-PR3534 WAI/TRANSPO M645 BOSCH 0 986 083 250 
380-131 FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. CARGO 332115 333966 LESTER 12611 MOBILETRON VR-V4291 WAI/TRANSPO M565 BOSCH 0 986 083 620 	380-132 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 2604091 LESTER 24011 FIT UNIT TG12C037 	380-133/08-073 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 593970 2543298 MOILETRON VR-V4291 FIT UNIT TG15C121 TRANSPO M576 
380-134 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 593948 2543301 FIT UNIT SG9B121 	380-135 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 595238 2543245 LESTER 20122 FIT UNIT TG17C026 	380-136 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599107 2610616 LESTER 11804 FIT UNIT FG18S046 





380-137 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599128 2610620 FIT UNIT FG23S027 	380-138 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599339 2618710B FIT UNIT TG15C131 	380-139 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599303 2618728B FIT UNIT FG18S047 
380-140/08-024 FEATURES A-Circuit Voltage Set Point 14.50 V REFERENCES.. OEM NO VAR201 UTM NO RV1201A ZAUFER 310N10257Z VOLTAG ARV9990 	380-150/08-031 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 32 % LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. LESTER 22343 23065 MOBILETRON VR-PR9466 WAI/TRANPO M529 VOLTAG ARV4811 VALEO NO 49381 	380-160/08-032 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. OEM NO 593529 593993 595993 LESTER 21494 21502 21661 21664 MOBILETRON VR-PR3529 TRANPO M562 FIT UNIT SG10B022 SG10B023 CARGO 234982 
380-170/08-033 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. OEM NO 2543327B 2542378B LESTER 11098 13970 13971 13974 MOBILETRON VR-PR2206 TRANPO M523 FIT UNIT 2542377B 2549275 	380-180/08-035 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function Self exciting function REFERENCES.. OEM NO 593793 LESTER 22970 23890 TRANPO M578 FIT UNIT TG15C012 TG15C038 CARGO 236601 	380-200/08-039 FEATURES B-Circuit Voltage Set Point 14.45V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 2542499 LESTER 13943 13968 13969 13969A MOILETRON VR-V2499 FIT UNIT SG10S029 SG10S035 TRANPO M520 

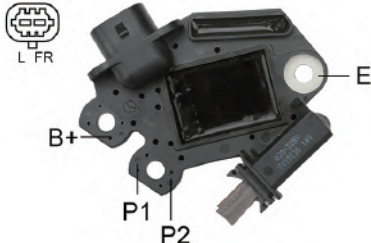

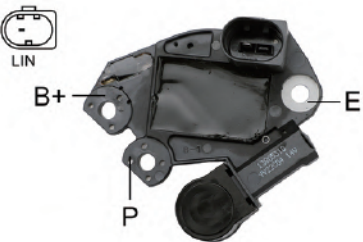
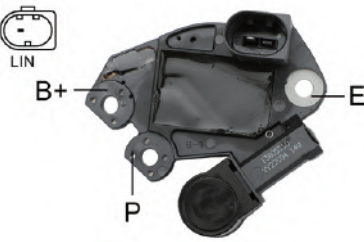
380-210/08-040 FEATURES B-Circuit Voltage Set Point 14.3V Soft Start 32% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self Exciting Function REFERENCES.. OEM NO 542209B 593333 13846 13848 21469 21767 LESTER VR-PR3617H MOILETRON 2541884 2541912 FIT UNIT M527 TRANSPO 230944 231663 CARGO 	380-230/08-043 FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V REFERENCES.. OEM NO 593675 599121 CARGO 234820 MOILETRON VR-PR4920 FIT UNIT TG9C013 	380-241 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2610119 FIT UNIT TG17C048 
380-242 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20 % LRC 3 sec Self Exciting Function BSS_3 ID=56 BSS Regulator REFERENCES.. OEM NO 2543315 2543315D CARGO 20023 	380-243 FEATURES B-Circuit Voltage Set Point 13.8 V LRC 3 sec Self Exciting Function BSS-2 ID= 53 BSS Regulator REFERENCES.. FIT UNIT 2608218 	380-244 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20 % LRC 3 Sec Self Exciting Function BSS_3 ID=56 BSS Regulator REFERENCES.. OEM NO 2608222 595457 593987 593918 CARGO 11162 FIT UNIT TG16C010 
380-245 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25 % LRC 3 Sec Self Exciting Function BSS_2 ID=57 BSS Regulator REFERENCES.. FIT UNITS 19087-600 2608216 2606616A CARGO 11502 	380-270/08-048 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function Self exciting function 	380-280/08-049 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20 % LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. LESTER 20638 20878 22555 VALEO NO 2608236 WAI/TRANSPO M411 CARGO 335251 AS ARE3141 

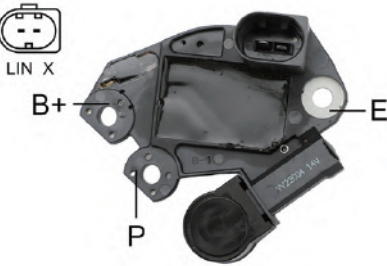
380-281 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 595379 260764M FIT UNIT TG15C146 	380-282 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2608235 FIT UNIT SG12B124 	380-283 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 595253 2608237 MOILETRON VR-V8237 FIT UNIT TG11C069 TRANSP0 M571 
380-284 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 595416 2608238 FIT UNIT TG9B107 	380-285 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20 % LRC 3 sec Self Exciting Function BSS 2 ID=52 BSS Regulator REFERENCES.. OEM NO 595416 440185 FIT UNIT TG9B041 TG9B042 	380-286 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20 % LRC 3 sec Self Exciting Function BSS 3 ID=56 BSS Regulator REFERENCES.. OEM NO 595252 595253 595379 MOBILETRON VR-V8237 FIT UNIT TG15C091 
380-287 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20% LRC 6 Sec Self Exciting Function BSS 2 ID=52 BSS Regulator REFERENCES.. OEM NO 2608238 	380-288 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25% Self Exciting Function BSS 2 ID=44 BSS Regulator REFERENCES.. OEM NO 2608237 	380-290/08-050 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication Self exciting function REFERENCES.. OEM NO 2608415 LESTER 20796 24024 FIT UNIT A0002655103 A0002655475 TRANSP0 M580 CARGO 330058 





380-300/08-051 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM function Self exciting function REFERENCES.. OEM NO 2542765 2542765C LESTER 11047 11069 11072 11144 FIT UNIT SG10S028 SG10S030 TRANSPO M524 MOILETRON VR-PR2765 	380-310/08-052 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. OEM NO 20051012 2655001 LESTER 11015 11020 11188 11227 FIT UNIT 2655424 2655516 TRANSPO M531 MOILETRON VR-V5001 CARGO 235845 	380-320/08-053 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. OEM NO 2650030C LESTER 11017 11018 13940 FIT UNIT TG12C014 TG12C035SP TRANSPO M534 MOILETRON VR-V0030 
380-330/08-054 FEATURES B-Circuit RVC=0 Vset=13.80V RC=70% Vset=14.45V Soft Start 18.75% LRC 2.5 sec DFM function RVC Regulator REFERENCES.. OEM NO 2650441 2650561 LESTER 11021 11023 11148 11265 FIT UNIT TG10S012 TG10S016 TRANSPO M540 MOILETRON VR-V0441 	380-340/08-055 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM function Self exciting function REFERENCES.. OEM NO 2650219 2650348 LESTER 11141 11142 11143 11601 FIT UNIT TG12C027 TG12C040 TRANSPO M558 MOILETRON VR-V0219 	380-360/08-057 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. OEM NO 37300-23720 2607089 LESTER 11011 FIT UNIT 2655023 TG9S018 CARGO 236224 MOILETRON VR-PR5023 
380-370/08-058 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 sec Self Exciting Function BSS Regulator REFERENCES.. VOLTAG ARV1261 LESTER 20797 VALEO 2614208 AS ARE3328 BMW 12317603777 	380-371 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2543616 FIT UNIT 2542720 	380-372 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 599232 2609958 


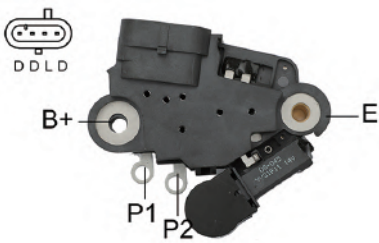




380-373 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2543231 TRANSP M543 MOILETRON VR-V3231 FIT UNIT TG17C035 TG17C021 TG17C015 	380-375 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 595464 2609960 TRANSP M464 FIT UNIT FG23S054 	380-376 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 595348 2609956 FIT UNIT TG15C157 TG15C093 
380-377 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2543204 FIT UNIT TG17C027 	380-378 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 595334 593771 2609955 FIT UNIT SG14B017 TG15C027B 	380-379 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 593536 2612263 FIT UNIT SG9B052 MOILETRON VR-V2263 
380-390/08-060 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. OEM NO 2655272 TA535B04901 TRANSP M639 MOILETRON 12673 	380-400/08-061 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting Function REFERENCES.. OEM NO 2606174 LESTER 23559 23560 FIT UNIT TG8C0118 TG8S019 CARGO 330504 TRANSP M572 	380-420/08-063 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM Function Self Exciting Function REFERENCES.. OEM NO 20071017 20080622 LESTER 11012 11013 11016 FIT UNIT A0002655011 A0002655045 MOILETRON VR-PR501 TRANSP M563 



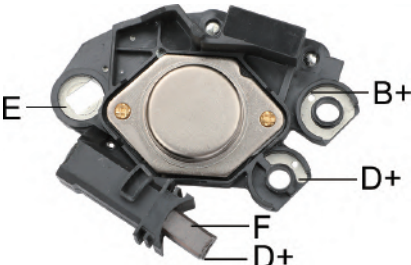
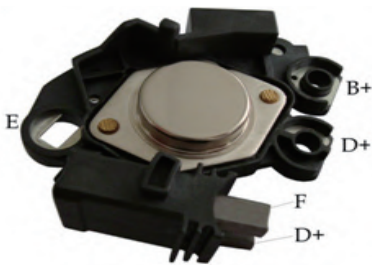

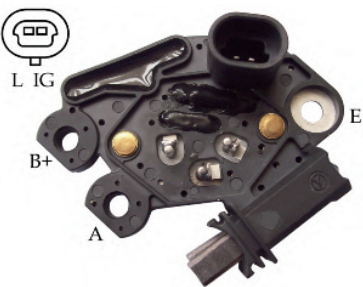

380-430/08-064 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM Function Self Exciting Function REFERENCES.. OEM NO 20030410 20031203 LESTER 11014 FIT UNIT A0002655009 TG11C028 MOILETRON VR-V5428 TRANSPO M536  	380-440/08-065 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function Self exciting function REFERENCES.. OEM NO 2543494 593532 LESTER 21785 21786 21788 21789 FIT UNIT SG15S016 SG15S018 CARGO 235657 TRANSPO M561 	380-441 FEATURES B-Circuit Voltage Set Point 13.70V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO EV6T-10300-CA 2623446 
380-442 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class03 LIN Regulator REFERENCES.. FIT UNITS 19680-600/2626098 TG12S237 2625568 	380-443 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 Class07 LIN Regulator REFERENCES.. VALEO NO 599053 LESTER NO 20683 VALEO UNIT 440426, 440407, FG23S022, FG23S063 	380-444 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class05 LIN Regulator REFERENCES.. FIT UNIT A20-459Y 
380-445 FEATURES B-Circuit Voltage Set point 14.3V Soft Start 12.5% LRC 3Sec Field Shorted Circuit Protection Self Exciting Function LIN 1.3 class04 LIN Regulator REFERENCES.. OEM NO 2614850 TG12C196 	380-450/08-066 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under / Over Voltage Indication Self exciting function DFM function REFERENCES.. VALEO NO 593689 CARGO 232962 234818 330319 AS ARE3028 MOBILETRON VR-PR2299  	380-460/08-067 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function Self exciting function REFERENCES.. OEM NO 593406 CARGO 235369 FIT UNIT A14VI34 A14VI45 MOILETRON VR-V3406SE  


380-480/08-069	380-490/08-070	380-530/08-074
FEATURES B-Circuit RVC=0 Vset=13.80V RC=70% Vset=14.45V Soft Start 18.75% LRC 2.5 sec DFM function RVC Regulator REFERENCES.. OEM NO 599386 MOILETRON VR-V5460 FIT UNIT 2605581 TG12C70 TRANPO M608 	FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under/ Over Voltage Indication Self Exciting Function REFERENCES.. VALEO NO 2542213 2548923 593389 CARGO 236390 LESTER 13945 23353 23982 MOBILETRON VR-PR3389 WAI/TRANPO M525 	FEATURES B-Circuit Voltage Set Point 14.00 V LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. VALEO NO 595305 VALEO UNIT TG17C032 
380-531	380-532	380-533
FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599296 2617059 FIT UNIT TG23C019 	FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599302 2618052 FIT UNIT FG20S012 TG15C130 	FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 %LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. VALEO NO 2619624 595325 599317 EGI NO 80PR-231 IK A NO 1.4012.1 CARGO NO 235808, 332102 LESTER NO 23290 AS NO ARE3051 WAI/TRANPO M573V1 VALEO UNIT TG17C061 FG23S031 
380-534	380-535	380-536
FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599340 2623788 FIT UNIT TG14C044 	FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599191 261372 FIT UNIT FG20S014 	FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599183 2613652 FIT UNIT FG23S061 



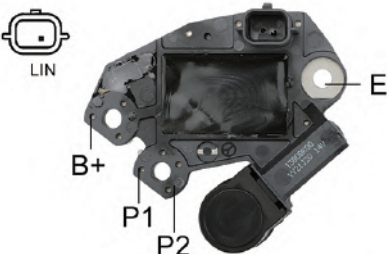


380-537 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599236 2608739 FIT UNIT FG18T094 	380-538 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 2613761 FIT UNIT FG15T036 	380-539 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599294 2618869B FIT UNIT FG23S073 
380-541 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 2543587 	380-542 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 2604313 FIT UNIT FG18S055 	380-543 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 595387 2543297 FIT UNIT TG15C075 
380-544 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599127 2610618 FIT UNIT FG23S09 	380-545 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 2604285 FIT UNIT TG15C167 	380-546 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 2610614 FIT UNIT TG18S032 






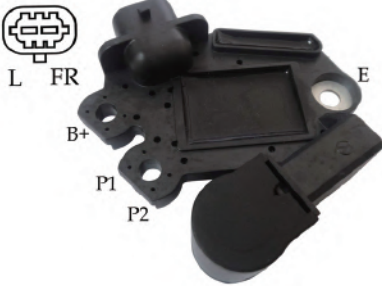
380-547 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 Class07 LIN Regulator REFERENCES.. FIT UNIT 2610649  	380-548 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class09 LIN Regulator REFERENCES.. FIT UNIT 2609409 TG15C163  	380-549 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 Class02 LIN Regulator REFERENCES.. FIT UNIT 2604283  
380-550/08-076 FEATURES B-Circuit Voltage Set Point 14.00V LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 2614772  	380-551 FEATURES B-Circuit Voltage Set Point 13.70V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599204 2618065 FIT UNIT TG9S100  	380-553 FEATURES B-Circuit Voltage Set Point 13.8 V Soft Start 25 % LRC 3 sec Self Exciting Function LIN1 Class01 LIN Regulator REFERENCES.. UTM NO RV9997A VALEO 2622943 AS ARE3217S VOLTAG ARV9997  
380-560/08-077 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 9RC8200 4702504  	380-610/08-082 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. FIT UNIT FG15S024  	380-640/08-085 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication DFM Function REFERENCES.. OEM NO 9RC7144 CARGO 330917 LESTER 11311 WAI M544 MOBILETRON VR-V5745  

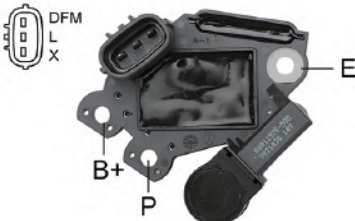
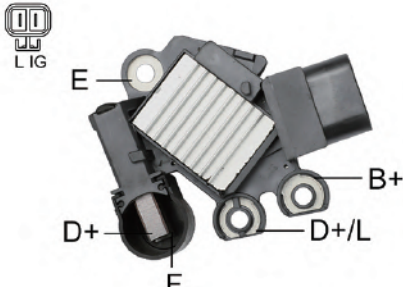

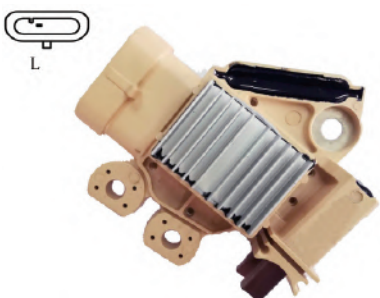



380-651 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 599149 2610181 FIT UNIT TG12C120 	380-660/08-087 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self exciting function REFERENCES.. FIT UNIT SG9S1309 	381-010/08-023 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 2542339B LESTER 11166 MOBILETRON VR-PR2339 TRANSPO M533 FIT UNIT A14VI63 SA14VI63 CARGO 131066 
381-030/08-045 FEATURES B-Circuit Voltage Set Point 14.80V Soft Start 30% LRC 5 sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. OEM NO 2546366C 2546493C LESTER 13720 MOBILETRON VR-PR6366 TRANSPO M515 FIT UNIT 2808491A A13VI147 	382-040/08-014 FEATURES A-Circuit Voltage Set Point 14.60V REFERENCES.. OEM NO 21225183 21225371 LESTER 12100 12101 12102 12104 MOBILETRON VR-PR1925H TRANSPO IP125 FIT UNIT AAK1111 AAK2301 CARGO 130661 131552 WAI 35-9401 	382-050/08-015 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 21225345 182046 LESTER 13224 14329 14567 14582 MOBILETRON VR-PR1000 TRANSPO IP1652 FIT UNIT 2078771 2095923 CARGO 130657 WAI 35-9405 
382-070/08-021 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO 590640 LESTER 12702 12709 20771 21141 MOBILETRON VR-PR128B TRANSPO IP126 FIT UNIT 2099755 2100363 CARGO 131120 	382-080/08-028 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 2521766 2523190 LESTER 13174 13349 13466 13467 MOBILETRON VR-VW005N TRANSPO M506 M508 FIT UNIT 2518017 2521682 CARGO 135393 131224 	382-110 FEATURES A-Circuit Voltage Set Point 14.50 V REFERENCES.. OEM NO 541456 593135 LESTER 12411 13059 MOBILETRON VR-PR7736 TRANSPO IP736 


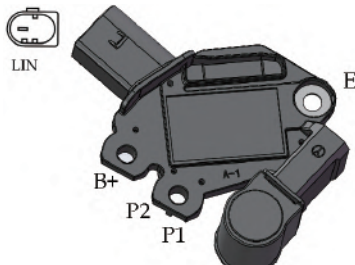



382-120 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO A14N67 	383-010/08-022 FEATURES A-Circuit Voltage Set Point 28.10V REFERENCES.. OEM NO 593260 MOILETRON VR-PR3960 FIT UNIT A14V119 CARGO 137489 	383-030/08-026 FEATURES A-Circuit Voltage Set Point 14.50 V REFERENCES.. OEM NO VAR521 
383-040/08-027 FEATURES A-Circuit Voltage Set Point 14.70V REFERENCES.. OEM NO 593434 593466 LESTER 23222 23223 CARGO 235079 TRANSPO M555 FIT UNIT SG12B040 SG9B054 	383-050/08-034 FEATURES A-Circuit Voltage Set Point 28.50 V REFERENCES.. 	383-060/08-036 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 13480351 9RC6131 LESTER 23910 CARGO 237153 TRANSPO M569 FIT UNIT 600028 TA000A55601 
383-070/08-038 FEATURES A-Circuit Voltage Set Point 14.50V REFERENCES.. OEM NO 2607144 2650571 FIT UNIT CA2023 	380-AU0 FEATURES B-Circuit Voltage Set point 14.50V Soft Start 18% LRC 2.5 Sec Field Shorted Circuit Protection Self Exciting Function REFERENCES.. OEM NO 9RC7129 FIT UNIT SG8S031 	380-B20 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 25 % LRC 5 Sec C Terminal Regulator Field Shorted Circuit Protection Self Exciting Function DFM Function REFERENCES.. OEM NO 1127-099RS CARGO 334222 LESTER 20409 VALEO 599269 MOBILETRON VR-V3530 WAI/TRANSPO M621 


380-B30 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 599102 2609957 FIT UNIT TG17C036 TG17C034 	380-B31 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. FIT UNIT CA2095IR TG17C034 	380-B40 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2543591 TRANSPO M567 FIT UNIT TG12C039 TG12C059 
380-B50 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 31 % LRC 5 sec Field Shorted Circuit Protection L Terminal Drives Choke Under / Over Voltage Indication Self exciting function REFERENCES.. OEM NO 593477 	380-B70 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2604772 FIT UNIT TG11C041 	380-B80 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2543438 FIT UNIT TG17C010 
380-B90 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 593873 2610118 FIT UNIT TG15C098 	380-BA0 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2609721 FIT UNIT TG11C059 	380-BE0 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 18% LRC 5 Sec Field Shorted Circuit Protection Self Exciting Function REFERENCES.. OEM NO 27700-0Y030 27060-0Y110 

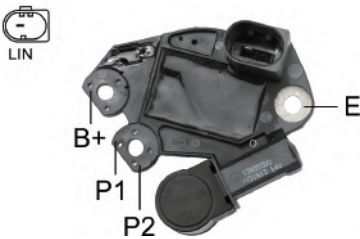
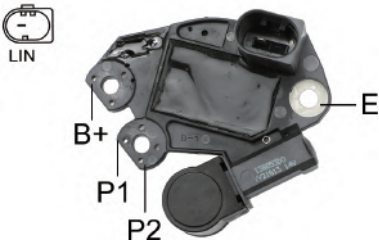
380-BF0	380-BG0	380-BJ0
FEATURES B-Circuit Voltage Set Point 14.50V Field Shorted Circuit Protection Soft Start 25% LRC 5 Sec C Terminal Circuit Protection Self Exciting Function REFERENCES.. LESTER 11702 FIT UNIT AVA3133 37300-2G750 	FEATURES B-Circuit Voltage Set Point 14.20V Soft Start 25% LRC 5 Sec C Terminal Regulator Field Shorted Circuit Protection Self Exciting Function REFERENCES.. OEM NO 2650447 702155 LESTER 11256 11258 11458 11673 FIT UNIT FG12T039 TG11S092 TRANPO M556 MOILETRON VR-VA0447 	FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 20 % LRC 5 Sec Field Shorted Circuit Protection REFERENCES.. OEM NO 37300-4A700 2610454 
380-BK0	380-BK1	380-BK2
FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 2618689 FIT UNIT 146681 TRANPO M609 	FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN1 Class06 LIN Regulator REFERENCES.. FIT UNIT 2616927A FG15T071 LESTER 20552 	FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % Self Exciting Function LIN2.1 Class 02 LIN Regulator REFERENCES.. OEM NO 2618692 FG15T057 
380-BL0	380-BV0	380-C10
FEATURES B-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. OEM NO AVA6037 2607144 2650571 LESTER 11651 TRANPO M618 FIT UNIT FG15S024 	FEATURES B-Circuit Voltage Set Point 14.20 V LRC 5 Sec DFM Function Self Exciting Function REFERENCES.. LESTER 11693 FIT UNIT 2614390 2614680 27060-0T230 TG12T050 	FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 sec Self exciting function BSS Regulator REFERENCES.. OEM NO 595458 2608221 FIT UNIT TG17C054 TG16C010 


380-C20 FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25% LRC 3 Sec Self Exciting Function BSS-2 ID=56 Class 12 BSS Regulator REFERENCES.. OEM NO 595457 2608220 FIT UNIT TG16C014 	380-C40 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 25 % C Terminal Regulator Field Shorted Circuit Protection Under / Over Voltage Indication REFERENCES.. FIT UNIT 37300-02600 2612772A 20624 	380-C60 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 18% LRC 5 Sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication REFERENCES.. 
380-CA0 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 18% LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self Exciting Function REFERENCES.. OEM NO SVES082417 	380-CK0 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 18% Field Shorted Circuit Protection Under / Over Voltage Indication Self Exciting Function REFERENCES.. OEM NO 9RC7144 	380-CQ0 FEATURES B-Circuit Voltage Set Point 14.10 V Soft Start 12.5 % LRC 6 Sec Self Exciting Function LIN1 Class00 LIN Regulator REFERENCES.. TOYOTA NO 277020Q140 VALEO 2627663 LESTER 20988 VOLTAG ARV9223 
380-CS0 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 12.5% Self exciting Function 1500 rpm Under / Over Voltage Indication DFM Function REFERENCES.. FIT UNIT 439803 440457 612249 FGN15T150 	380-CU0 FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20% LRC 3 Sec Self Exciting Function BSS 2 ID=53 BSS Regulator REFERENCES.. OEM NO 599065 2714169 CARGO 116179 	380-CV0 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 12.5% Field Lamp Shorted Circuit Protection Under / Over Voltage Indication DFM Function REFERENCES.. OEM NO 2612429 TG9S114 

380-D70	380-D80	380-D90
FEATURES B-Circuit Voltage Set Point 14.5V Soft Start 12.5% LRC 2.5 sec Field Shorted Circuit Protection Under/Over Voltage Indication Self exciting DFM Function REFERENCES.. OEM NO Hyundai 37370-25600 37370-25700 37370-26100 37370-2G700 37370B LESTER 11452 11492 11607 11710 14006 	FEATURES A-Circuit Voltage Set Point 28.50 V REFERENCES.. OEM NO 129E20-77200 2616028 	FEATURES B-circuit Voltage Set Point 14.5V Soft Start 12.5% LRC 5 sec Field Shorted Circuit Protection Self Exciting Function Under/Over Voltage Indication REFERENCES.. OEM NO 37300-37110 
380-DD0	380-DF0	380-DK0
FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 %LRC 3 Sec Self Exciting Function LIN1.3 class16 LIN Regulator REFERENCES.. OEM NO FGN20S026 	FEATURES A-Circuit Voltage Set Point 28.40 V REFERENCES.. OEM NO 21Q6-42001 	FEATURES A-Circuit RC=0 Vs=13.50V RC=55% Vs=14.25V PCM Regulator REFERENCES.. 
380-L10/08-075	380-L20	380-L60
FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 595243 MOILETRON VR-V3279 FIT UNIT TG17C041 TG17C031 TRANSP0 M573 	FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 2611143 FIT UNIT TG15C135 	FEATURES B-Circuit Voltage Set Point 13.70 V Soft Start 25% LRC 5 Sec Self Exciting Function LIN 1.3 class 25 LIN Regulator REFERENCES.. OEM NO FGN15S116 

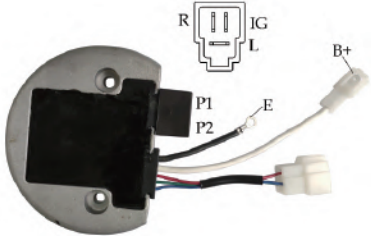
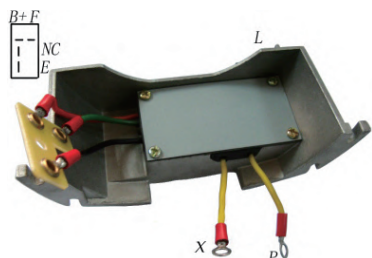
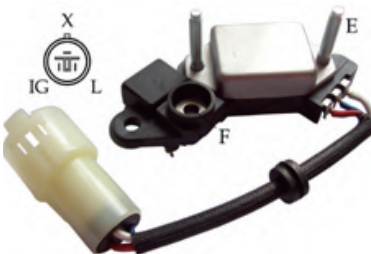
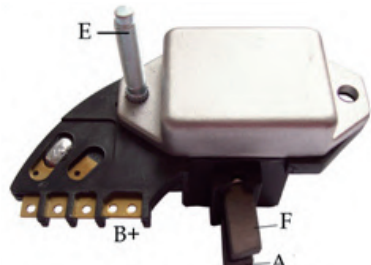
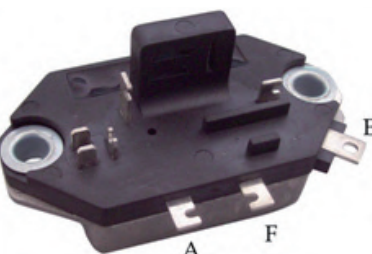
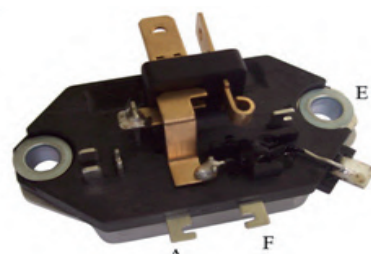
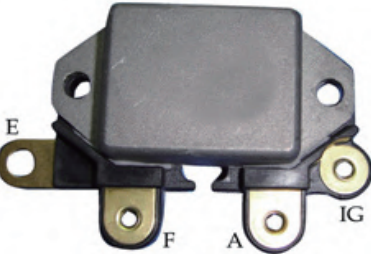
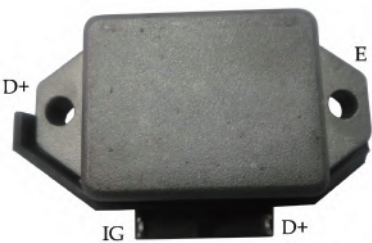
380-L80 FEATURES B-Circuit Voltage Set point 13.80 V Soft Start 22% LRC 2.5 Sec RVC Regulator Field Shorted Circuit Protection Under / Over Voltage indication Self Exciting Function DFM Regulator REFERENCES.. OEM NO FG18S146 	380-LB0 FEATURES B-Circuit Voltage Set Point 14.00 V Soft Start 12.5 %,LRC 3 Sec Self Exciting Function LIN2 Class31 LIN Regulator REFERENCES.. OEM NO TG15C229 	380-LC0 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 12.5% LRC 5 sec Field Shorted Circuit Protection Under /Over Voltage Indication Self exciting function DFM function REFERENCES.. OEM NO TG12C016/593845 
380-LD0 FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 12.5 % LRC 2.5 sec Field Shorted Circuit Protection Under/Over Voltage Indication DFM function REFERENCES.. OEM NO 2625389 	380-13A FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 593975 2543300 FIT UNIT TG11C074 	380-13B FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 sec Self Exciting Function LIN2 class21 LIN Regulator REFERENCES.. OEM NO 2612988 599212 599228 FG18S045 22637 LESTER MOBILETRON VR-V2988 
380-13C FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 Class00 LIN Regulator REFERENCES.. OEM NO 2619446 	380-13D FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class05 LIN Regulator REFERENCES.. OEM NO FG18S073 / 2611131A 410004279 LESTER 11811 	380-13E FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 Class11 LIN Regulator REFERENCES.. OEM NO 2618222A CG25S025 LESTER 11741 

380-13F FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class07 LIN Regulator REFERENCES.. OEM NO 599251 2618375 439819 440473 FG18S127 LESTER 20736 	380-13G FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class2 LIN Regulator REFERENCES.. OEM NO 2604289 	380-13J FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN Regulator LIN1.3 class20 REFERENCES.. OEM NO 440456/2617513 
380-13K FEATURES B-Circuit Voltage Set Point 14.30V Soft Star 12.5% LRC 3 Sec Self Exciting Function LIN 1.3 class27 LIN Regulator REFERENCES.. OEM NO 2618658 FG23S068 	380-37A FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2609959 FIT UNIT FG18S019 	380-37B FEATURES B-Circuit Voltage Set Point 14.30V Soft Start20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2543536 LESTER 11393 FIT UNIT FG23S010 MOILETRON VR-V4341 
380-37C FEATURES B-Circuit Voltage Set Point 14.30V Soft Start20% LRC 3 Sec Self Exciting Function BSS Regulator REFERENCES.. OEM NO 2543505 FIT UNIT TG17C015 	380-37D FEATURES B-Circuit Voltage Set Point 14.20 V Soft Start 20% LRC 5 Sec Self Exciting Function BSS_3 ID=57 BSS Regulator REFERENCES.. OEM NO 2605610 LESTER 11498 	380-37E FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 20 % LRC 3 Sec Self Exciting Function BSS Regulator BSS_2 ID=59 REFERENCES.. OEM NO 2614208 

380-53A FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599235 2618056M FIT UNIT FG18S013 MOILETRON VR-V8056 	380-53B FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599306 2618713 FIT UNIT FG15T036 	380-53C FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO 599304 2618712 FIT UNIT TG12C026 TG11C059 
380-53D FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. MOBILETRON VR-V8060 VALEO NO 599237 599283 CARGO 333986 LESTER 10174 WAI/TRANPO M620 AUDI UNIT 06H903017K 	380-53E FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 12.5% LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. OEM NO AVA3408 2612825M 	380-53F FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN1 Class04 LIN Regulator REFERENCES.. OEM NO 2542964 2543279 2580469 2591559 593958 595243 MOBILETRON VR-V3279 FIT UNIT TG17C028 TG17C030 TG17C030B TG17C032 
380-53G FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 Class03 LIN Regulator REFERENCES.. FIT UNIT TG15C177/2613724 	380-53H FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 Class03 LIN Regulator REFERENCES.. FIT UNIT 2543396A TG14C019 LESTER 11810 	380-53J FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 Class02 LIN Regulator REFERENCES.. FIT UNIT TG11C095 TG11C094 2611444 599140 440344 LESTER 20893 

380-53L FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 Class12 LIN Regulator REFERENCES.. VALEO 2618062 LESTER 11821, 20648 MOBILETRON VR-V8062 VOLTAG ARV1238 AS ARE3066  	380-53M FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class06 LIN Regulator REFERENCES.. OEM NO 2608729  	380-53N FEATURES B-Circuit Voltage Set Point 14.30V Soft Start 25 % LRC 3 Sec Self Exciting Function LIN1.3 Class9 LIN Regulator REFERENCES.. FIT UNIT 599342 2623792 FG18T071  
380-53P FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN1.3 class 7 LIN Regulator REFERENCES.. FIT UNIT 2623790 FG23S057 LESTER 11809  	380-53Q FEATURES B-Circuit Voltage Set point 14.30 V soft Start 12.5% LRC 3Sec Field Shorted Circuit Protection Self Exciting Function LIN 1.3 class 14 LIN Regulator REFERENCES.. OEM NO 2624195  	380-54A FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN2 class04 LIN Regulator REFERENCES..  
380-54B FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN1 Class02 LIN Regulator REFERENCES.. FIT UNIT TG12C026 2543296 LESTER 24101  	380-53T FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 25% LRC 3 Sec Self Exciting Function LIN1.3 class13 ID: 105 Code: 105 LIN Regulator REFERENCES.. VALEO NO 599431 2624193 VALEO UNITS 2715186B EG15T015 EG15T020 LESTER EG15T026 EG15T027 11938 21073 21089  	381-060 FEATURES B-Circuit Voltage Set Point 14.50V Soft Start 18 % LRC 2.5 sec Field Shorted Circuit Protection Sense Open Indication Under Voltage Indication Over Voltage Indication DFM function REFERENCES.. VALEO NO 2546366D 2546493D VALEO UNITS 2542445A A13V1144 A13V1145 LESTER A13V1192+ A13V1193+ 13864 22916 23209  










380-53K	380-C90	
FEATURES B-Circuit Voltage Set Point 14.30 V Soft Start 12.5 % LRC 3 Sec Self Exciting Function LIN Regulator REFERENCES.. LESTER 20352 VW UNIT 04C903023L/F  The image shows a LIN Regulator 380-53K. It is a black, rectangular electronic component with a circular connector on the left side. The connector has a label 'LIN' and a minus sign. The component has several mounting points labeled B+, P1, P2, and E. A small circular feature is visible on the right side.	FEATURES B-Circuit Voltage Set Point 14.50 V Soft Start 30 % LRC 5 sec Field Shorted Circuit Protection Under Voltage Indication Over Voltage Indication Self Exciting Function REFERENCES.. LESTER 20447 VALEO UNIT SG7S062  The image shows a LIN Regulator 380-C90. It is a black, rectangular electronic component with a circular connector on the left side. The connector has a label 'L' and a minus sign. The component has several mounting points labeled E, B+, P1, and P2. A small circular feature is visible on the right side.	

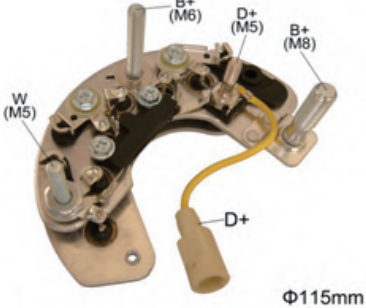
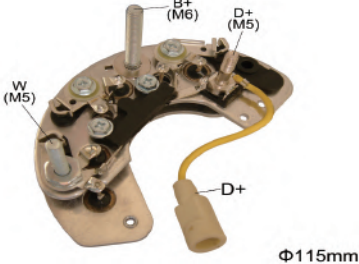
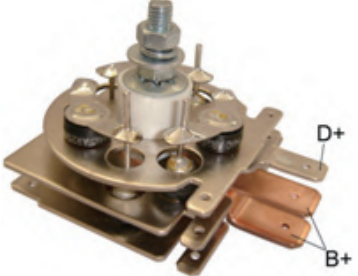
393-040 FEATURES Voltage Set Point 14.40 V Customer provide Negative heat sink REFERENCES.. 	390-690 FEATURES A-Circuit Voltage set Point 14.4V Soft Star 18% LRC 2.5s Field,Lamp Shorted Circuit Protection Under/Over Voltage Indication REFERENCES.. OEM NO FTD1522FA 	353-030/12-001 FEATURES A-Circuit Voltage Set Point 28.80 V REFERENCES.. 
353-040/12-003 FEATURES A-Circuit Voltage Set Point 29.30V REFERENCES.. CARGO 135296 	353-080/12-010 FEATURES A-Circuit Voltage Set Point 29.30V REFERENCES.. OEM NO 600821830 S6D155 	353-090/12-011 FEATURES A-Circuit Voltage Set Point 29.20V REFERENCES.. OEM NO 7440000900 KM156 CARGO 135321 
353-100/12-012 FEATURES A-Circuit Voltage Set Point 28.40V REFERENCES.. OEM NO 0375190150 0375190151 CARGO 234999 	353-110/12-015 FEATURES A-Circuit Voltage Set Point 28.50V REFERENCES.. OEM NO 0350004858 	354-080/12-016 FEATURES A-Circuit Voltage Set Point 14.50 V REFERENCES.. 

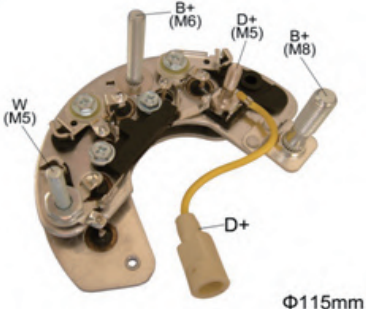

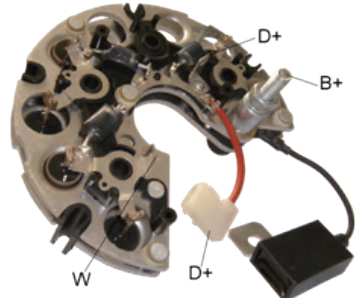


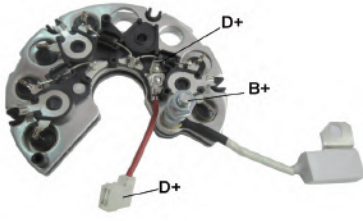

354-050/12-007

FEATURES	A-Circuit Voltage Set Point 28.80V
REFERENCES..	
OEM NO	1440000580 1440000730
CARGO	132092
TRANSP	IZ226
MOBILETRON	VR-H2003-1B










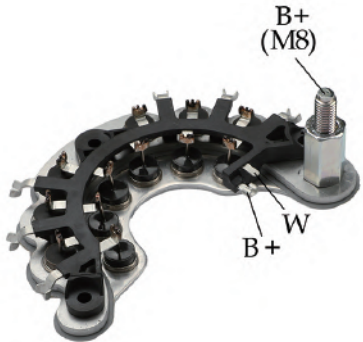
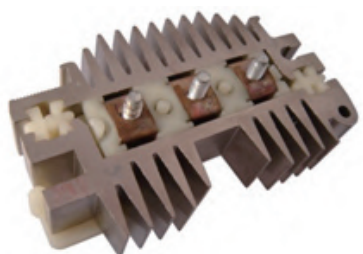
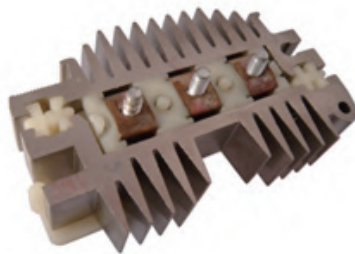
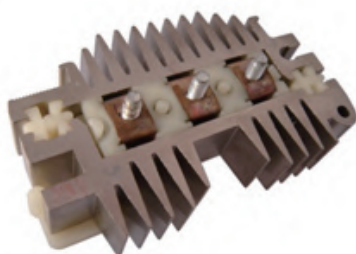
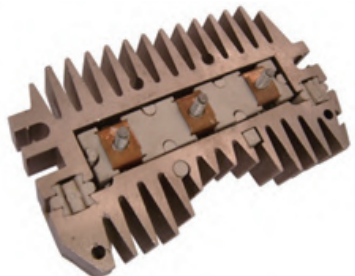
200-020/LUS133 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×41.7mm Battery Post With M5×53.7mm W-Post With Lead Wire 110mm With Trio For use on: Massey Fergusson, J.I. Case REFERENCES.. LUCAS 84201 84422 CARGO 131304 MOBILETRON RL-01H TRANSPO ILR566HD FIT UNIT CA600IR  Φ115mm	200-050/LUS136 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×46.5mm Battery Post With M5×47.5mm W-Post With Lead Wire 110mm With Trio For use on: Ford Tractor REFERENCES.. LUCAS 84468 UBB136 CARGO 132720 MOBILETRON RL-11H TRANSPO ILR567HD FIT UNIT CA1031IR  Φ115mm	200-060/LUS137 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×43.7mm Battery Post With M5×53.7mm W-Post With M4×28mm Trio Post With Lead Wire 110mm With Trio REFERENCES.. LUCAS 84469 UBB137 CARGO 132721 MOBILETRON RL-09H TRANSPO ILR568HD  Φ115mm
200-090/LUS140 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×46.5mm Battery Post With M5×47.5mm W-Post With Lead Wire 110mm With Trio REFERENCES.. LUCAS 84456 UBB140 CARGO 132718 MOBILETRON RL-06H TRANSPO ILR570HD  Φ115mm	200-100/LUS143 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×32.5mm Battery Post With M5×53.7mm W-Post With Lead Wire 110mm With Trio For use on: Industrial REFERENCES.. LUCAS 84889 UBB143 MOBILETRON RL-01H TRANSPO ILR571HD  Φ115mm	200-110/LUS145 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×43.7mm Battery Post With M5×47.5mm W-Post With M4×28mm Trio Post With Lead Wire 110mm With Trio For use on: Ford REFERENCES.. LUCAS 4572 UBB145 CARGO 136666 MOBILETRON RL-21H TRANSPO ILR572HD  Φ115mm
200-120/LUS147 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×46.5mm Battery Post With M5×47.5mm W-Post With Trio For use on: Industrial REFERENCES.. LUCAS 84888 UBB147 CARGO 133430 MOBILETRON RL-07H TRANSPO ILR574HD  Φ115mm	200-130/LUS148 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×52mm Battery Post With M5×53.7mm W-Post With M5×31.5mm Trio Post With Lead Wire 110mm With Trio REFERENCES.. LUCAS 84976 CARGO 136324 MOBILETRON RL-10H TRANSPO ILR576HD MEGNETI MARELLI 63328506  Φ115mm	200-140/LUS149 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×32.5mm Battery Post With M5×53.7mm W-Post With Lead Wire 110mm With Trio REFERENCES.. LUCAS 84574 UBB138 CARGO 138808 MOBILETRON RL-22H TRANSPO ILR569HD  Φ115mm




200-150/LUS152	200-230	201-010/LUS1101
FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×41.7mm Battery Post With M8×38mm Battery Post With M5×47.5mm W-Post With M5×25mm(M5-M4) With Lead Wire 110mm With Trio REFERENCES..  Φ115mm	FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6×41.7mm Battery Post With M5×51mm W-Post With M5×47.5mm Trio Post With Lead Wire 100mm With Trio REFERENCES.. LESTER 12526 FIT UNIT 66021590 Lucas LEA0403  Φ115mm	FEATURES Diodes: 9-25 Ampere Button With M5×50mm Mounting Post For use on: Austin, Lotus, MG, Triumph, Chrysler & Ford Imports REFERENCES.. LUCAS 83166 83334 83520 83842 CARGO 130643 MOBILETRON RL-08HV TRANSPO ILR166 


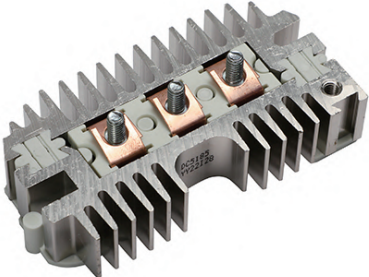
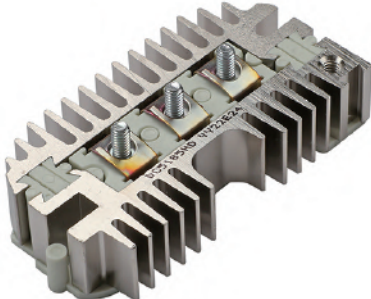
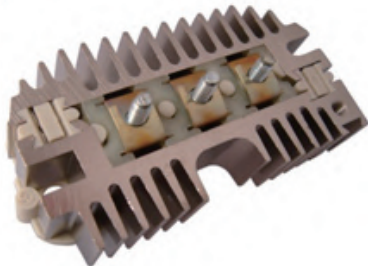
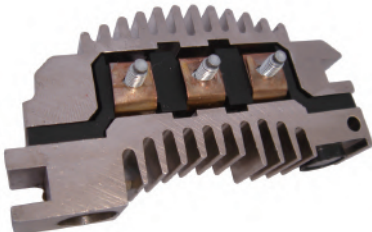

203-020/LA1102 FEATURES Diodes: 6-35 Ampere Diameter OD: 115mm With M6*41.7MM Battery Post With N8*38mm Battery Post With m5*47.5mm W-Post With M5*25 Trio Post With Lesd Wire 110mm With Trio REFERENCES..  Φ115mm	203-030/LA1103 FEATURES Diodes: 6-50A Avalanche With Trio Without Capacitor Without "W" Terminal REFERENCES.. OEM NO BVO-1-105 	203-080/LA1107-1 FEATURES Diodes: 6-50A Avalanche With Trio With Capacitor With "W" Terminal REFERENCES.. OEM NO 5B03-105-03 
203-210/LA1128B FEATURES Diodes: 8-50A Avalanche With M6*51mm Battery Post With Trio With Capacitor With "W" terminal For 24V Alternators REFERENCES.. 	203-230/LA1130 FEATURES Diodes: 6-35A Avalanche With M6*51mm Battery Post With Trio Without "W" terminal REFERENCES.. 	203-310/LA1139 FEATURES Diodes: 6-35 Ampere With M5*30mm Battery Post Without Trio Without Capacitor REFERENCES.. 
203-620 FEATURES Diodes:6-50A Avalanche With M6*51mm Battery Post With Trio With Capacitor Without "W"Terminal REFERENCES.. 	204-010/LA1114 FEATURES Diodes: 6-35 Ampere With Trio Without Capacitor Without "W" Terminal REFERENCES.. OEM NO 56-65-02 	204-020/LA1115 FEATURES Diodes: 6-35 Ampere Without Tiro Without Capacitor Without "W" Terminal REFERENCES.. OEM NO 56-65-02e 

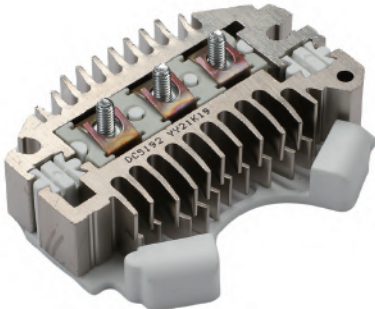
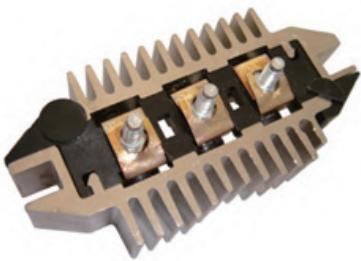
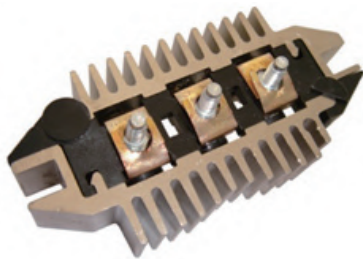
[illegible]


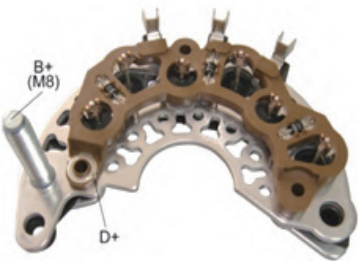
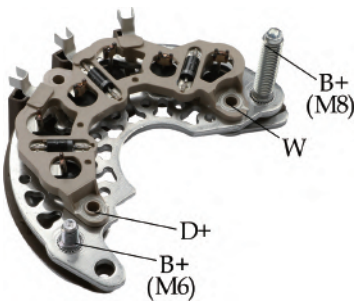
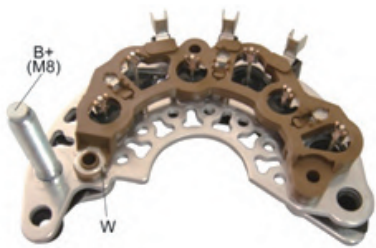
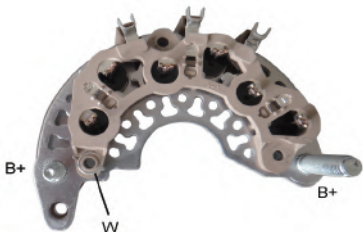
210-140/DC5263D FEATURES Diodes: 6-50 A Avalanche With (M8+M6)×46mm Battery Post REFERENCES.. DELCO 10480228 TRANSPO DR4220 	210-150/DC5300 FEATURES Diodes: 6-50A Avalanche For use on: WAI 1998-2000 Saturn 31-213 SCI, SLSedan, SWWagon 1.9L REFERENCES.. DELCO 10492300 CARGO 232070 MOBILETRON RD-25A TRANSPO DR1200 	210-260/DC5304 FEATURES Diodes: 6-50A Avalanche With Trio REFERENCES.. 
210-302/DCE5173 FEATURES Diodes: 6-50A Avalanche With M8×47.3mm Battery Post installed With Aluminum Heat sinks With Trio REFERENCES.. DELCO 10475034 CARGO 136595 MOBILETRON RD-04B TRANSPO DER2000 FIT UNIT CA8611R 	210-390/DCE5177 FEATURES Diodes: 6-50A Avalanche With M8×46mm Battery Post With Aluminum Heat sinks REFERENCES.. DELCO 10493596 CARGO 231797 MOBILETRON RD-29 TRANSPO DER2010 	210-530/DC5302D-1 FEATURES Diodes: 6-35A Avalanche Press-Fit With M8×46mm Battery Post With Aluminum Heat sinks REFERENCES.. DELCO 10475758 10492837 MOBILETRON RD-99 TRANSPO DR4204 210-540/DC5301D-1 FEATURES Diodes: 6-50A Avalanche Press-Fit REFERENCES.. DELCO 10475758 10492837 MOBILETRON RD-99 TRANSPO DR4204HD 
210-560/DC5302-1 FEATURES Diodes: 6-35A Avalanche Press-Fit With Aluminum Heat sinks REFERENCES.. DELCO 10457236 10472597 CARGO 131880 TRANSPO DR4000 	211-010/DC6100 FEATURES Diodes: 6-50A Avalanche With M6×53.5mm Battery Post REFERENCES.. MOBILETRON RD-26 TRANSPO DR4400 	211-020/DC6102 FEATURES Diodes: 6-50A Avalanche With M8×53.5mm Battery Post REFERENCES.. DELCO NO 10494744 MOBILETRON RD-26 WAI/TRANSPO DR4400 VOLTAG AED4400 

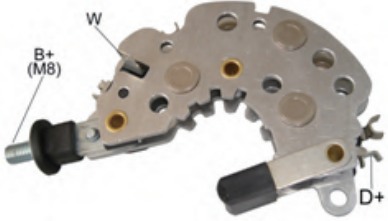



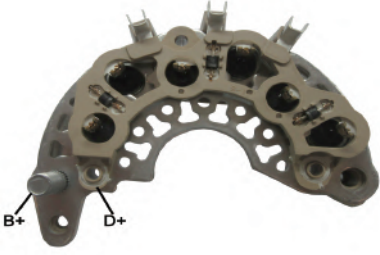
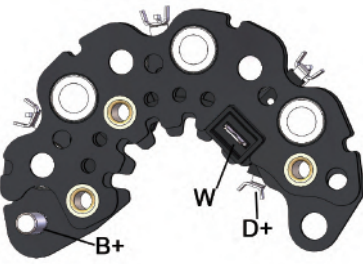
211-030/DC6103 FEATURES Diodes: 6-50A Avalanche With M6×53mm Battery Post REFERENCES.. DELCO 10494503 CARGO 232668 TRANSPO DR4402 	211-033/DC6103HD FEATURES Diodes: 6-60A Avalanche REFERENCES.. DELCO 10494503 MOBILETRON RD-26HD TRANSPO DR4402HD 	211-050/DC6104 FEATURES Diodes: 6-50A Avalanche With 5/16"X45mm Battery Post With insulator REFERENCES.. DELCO 10502870 CARGO 331012 MOBILETRON RD-38A TRANSPO DR2400 
211-052/DC6104B FEATURES For 24V Alternators REFERENCES.. DELCO NO 10510456 CUMMINS UNIT 972735 4936879 WAI/TRANSPO DR2402 VOLTAG AED2402 LESTER 8708 8709 	211-070/DC6106 FEATURES Diodes: 12-50A Avalanche With M8×52.5mm Battery Post REFERENCES.. CARGO 235655 FIT UNIT 10480403 001500850 WAI/TRANSPO DER1650 	212-010/DC5070 FEATURES Diodes: 6-25 Ampere Button REFERENCES.. DELCO 1975313 1985313 CARGO 131875 MOBILETRON RD-31 TRANSPO DR5070 
212-030/DC5072 FEATURES Diodes: 6-50 Ampere Button REFERENCES.. DELCO 1975313 1985313 MOBILETRON RD-31H TRANSPO DR5072 	212-040/DC5075 FEATURES Diodes: 6-50 Ampere Button Positive Ground Version REFERENCES.. DELCO 1975313 D3919 MOBILETRON RD-14 WAI/TRANSPO DR5075 	212-050/DC5085 FEATURES Diodes: 6-50 Ampere Button Positive Ground Version of 12121520 REFERENCES.. DELCO 1852744 1875812 MOBILETRON RD-24 WAI/TRANSPO DR5085 


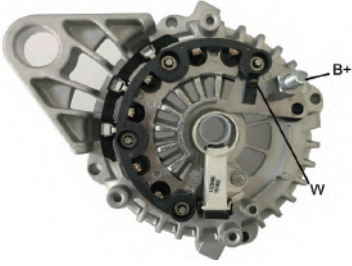
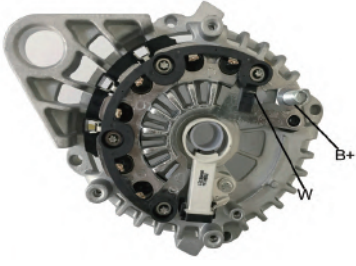
212-060/DC5170 FEATURES Diodes: 6-50 Ampere Button REFERENCES.. DELCO 1985801 D3985 MOBILETRON RD-15 TRANSPO DR5170 	212-061/DC5172 FEATURES Diodes: 6-50 Ampere Button REFERENCES.. 	212-070/DC5180 FEATURES Diodes: 3-50A Avalanche 3-50A Ampere Button REFERENCES.. DELCO 10467052 1989774 CARGO 131881 MOBILETRON RD-06A TRANSPO DR5176 
212-090/DC5181 FEATURES Diodes: 6-50A Ampere Button REFERENCES.. DELCO 10470609 CARGO 231062 MOBILETRON RD-06A TRANSPO DR5177 	212-091/DC5181B FEATURES Diodes: 6-50A Avalanche For 24V Alternators REFERENCES.. 	212-120/DC5182 FEATURES Diodes: 6-50A Jumbo Avalanche Button With Recessed Mounting Hole REFERENCES.. DELCO 10475800 CARGO 232068 MOBILETRON RD-07 TRANSPO DR5178 
212-130/DC5183 FEATURES Diodes: 6-50A Jumbo Avalanche Button REFERENCES.. DELCO 10472095 CARGO 232069 MOBILETRON RD-08 TRANSPO DR5179 	212-150/DC5184 FEATURES Diodes: 6-25 Ampere Button REFERENCES.. DELCO 1875645 CARGO 130555 MOBILETRON RD-17 TRANSPO DR5080 	212-151/DC5184-1 FEATURES Diodes: 6-35 Ampere Button REFERENCES.. DELCO 1875645 MOBILETRON RD-17H 



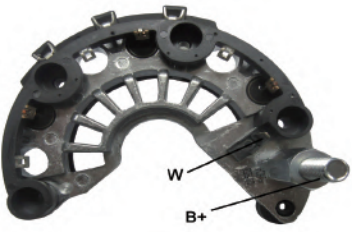
212-152/DC5184HD FEATURES Diodes: 6-50 Ampere Button REFERENCES.. TRANSPO DR5082 MOBILETRON RD-17H 	212-170/DC5185 FEATURES Diodes: 6-25 Ampere Button REFERENCES.. DELCO 1852209 1875627 CARGO 130673 MOBILETRON RD-09 TRANSPO DR5040 	212-171/DC5185HD FEATURES Diodes: 6-50 Ampere Button REFERENCES.. TRANSPO DR5042 MOBILETRON RD-09H 
212-180/DC5185-1 FEATURES Diodes: 6-25 Ampere Button Positive Ground Version of 12121700 REFERENCES.. TRANSPO DR5045 MOBILETRON RD-30 	212-200/DC5186 FEATURES Diodes: 6-25 Ampere Button REFERENCES.. DELCO 3472311 CARGO 130667 MOBILETRON RD-10 TRANSPO DER1000 	212-220/DC5187 FEATURES Diodes: 6-50 Ampere Button REFERENCES.. DELCO 1988976 CARGO 131877 MOBILETRON RD-05 TRANSPO DR5173 
212-221/DC5188 FEATURES Diodes: 6-50A Avalanche REFERENCES.. TRANSPO DR5174 MOBILETRON RD-06 	212-222/DC5188B FEATURES Diodes: 6-50A Avalanche For 24V Alternators REFERENCES.. 	212-230/DC5189 FEATURES Diodes: 3-50A Avalanche 3-50A Jumbo Button REFERENCES.. TRANSPO DR5175 MOBILETRON RD-06A 

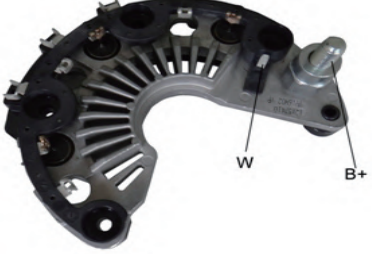

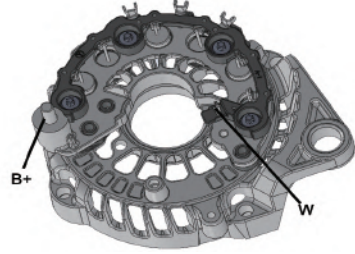

212-240/DC5190 FEATURES Diodes: 6-25 Ampere Button REFERENCES.. DELCO 1984454 CARGO 131873 MOBILETRON RD-12 TRANSPO DR5050 	212-241/DC5191 FEATURES Diodes: 6-50 Ampere Button REFERENCES.. MOBILETRON RD-12H TRANSPO DR5052 	212-250/DC5192 FEATURES Diodes: 6-50 Ampere Button REFERENCES.. DELCO 1987061 CARGO 131874 MOBILETRON RD-13HV TRANSPO DR5054 
212-251/DC5193 FEATURES Diodes: 6-70 Ampere Button REFERENCES.. TRANSPO DR5056 	212-280/DCE1003 FEATURES Diodes: 6-25 Ampere Button REFERENCES.. DELCO 3472813 CARGO 131458 MOBILETRON RD-18H TRANSPO DER1003 	212-281/DCE1004 FEATURES Diodes: 6-35 Ampere Button REFERENCES.. DELCO 3493008 CARGO 132931 WAI/TRANSPO 31-129/DER1004 
213-022/DC5181AP FEATURES Diodes: 6-50A Avalanche Press fit REFERENCES.. DELCO 10470609 D3992 CARGO 231062 MOBILETRON RD-60A TRANSPO DR5177PE 	213-024/DC5181BP FEATURES Diodes: 6-50A Avalanche For 24V Alternators REFERENCES.. 	213-030/DC5187 FEATURES Diodes: 6-50A Ampere Press fit diodes REFERENCES.. TRANSPO DR5173PE 


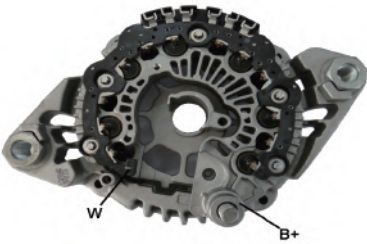

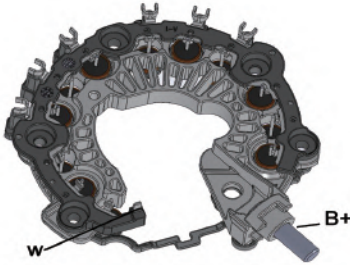
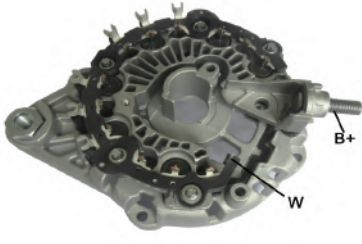

213-041/DC5281P FEATURES Diodes: 6-60A Avalanche Press fit REFERENCES.. DELCO 10512371 MOBILETRON RD-36 TRANSPO DR5186 	214-070 FEATURES Diodes: 8-35A Ampere With M6×29mm Battery Post With Trio REFERENCES.. FIT UNIT JFZ177 	214-080/DC1101 FEATURES Diodes: 6-35A Avalanche With M8×47.5mm Battery Post With Trio REFERENCES.. DELCO 96540542 MOBILETRON RD-37 TRANSPO DR2910 GAUSS GA1795 
214-090/DC1102 FEATURES Diodes: 6-35A Avalanche With M8×47.5mm Battery Post With Trio REFERENCES.. MOBILETRON RD-39H 	214-100/DC1103 FEATURES Diodes: 6-35A Avalanche With M8×47.5mm Battery Post With M6×21mm Battery Post With Trio REFERENCES.. TRANSPO DR2206 	214-110/DC1105 FEATURES Diodes: 6-35A Avalanche With M6×21mm Battery Post Without Trio REFERENCES.. 
214-131 FEATURES Diodes: 6-60A Avalanche With M8×47.5mm Battery Post With M6×21mm Battery Post Without Trio REFERENCES.. FIT UNIT 23366R-OS/6651540002 	214-140/DC1122A FEATURES Diodes: 6-50A Avalanche With M8×47.5mm Battery Post Without Trio REFERENCES.. DELCO 220206 TRANSPO DR2295 	214-150/DC4100 FEATURES Diodes: 6-35A Avalanche With M8 Battery Post Without Trio REFERENCES.. DELCO IAT8790 CARGO 234307 TRANSPO DR6871 








214-160/DC4108 FEATURES Diodes: 6-60A Avalanche With M8 Battery Post With Trio REFERENCES.. 	214-200/DC9410 FEATURES Diodes: 6-50A Avalanche With M6×38mm Battery Post With Trio REFERENCES.. DELCO 19020601 MOBILETRON RD-32 TRANSPO DR9410 CARGO 235139 	214-210/DC9411 FEATURES Diodes: 6-50A Avalanche With M6×38mm Battery Post With Trio With P-Terminal REFERENCES.. DELCO UNIT 19020604 19020606 CARGO 235028 TRANSPO DR9411 VOLTAG AED9411 
214-530 FEATURES Diodes: 8-35A Ampere With M6 Battery Post With Trio REFERENCES.. DELCO UNIT 19020703 19020704 19020706 PIC NO 77401152 LESTER 8470 8471 PSH NO 053.000.079.200 053.000.079.206 	214-720 FEATURES Diodes: 6-50A Avalanche Diameter OD:111 With M6×21mm Battery Post With Trio REFERENCES.. LESTER 8484 MOBILETRON RD-39H RD-41 TRANSPO DR2911 FIT UNIT 31400-85Z00 31400-85Z01 31400-85Z02 	214-760 FEATURES Diodes: 6-50A Avalanche With M8×19mm Battery Post With Trio REFERENCES.. 
214-790 FEATURES Diodes: 6-50A Avalanche With M6×38mm Battery Post With Trio REFERENCES.. LESTER 8460 FIT UNIT 19020609 	215-020/DC1124A FEATURES Diodes: 6-50A Avalanche With M8×28.5mm Battery Post(L) With M8×35mm Battery Post (R) Customer provide Negative heat sink REFERENCES.. LESTER 8486 	215-030/DC1124AH FEATURES Diodes: 3-50A Avalanche With M8×28.5mm Battery Post(L) With M8×35mm Battery Post (R) Without negative heat sink as DC1124A REFERENCES.. LESTER 8486 








215-035 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post(R) With M8×35mm Battery Post(L) Customer provide negative heat sink REFERENCES.. 	215-037 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post Bracket ID: 121.3mm Bearing ID: 38mm Mounting: W/O REFERENCES.. FIT UNIT 13502592 	215-040/DC6109A FEATURES Diodes: 6-60A Avalanche With M6×46.5mm Battery Post REFERENCES.. DELCO 10503581 10510904 MOBILETRON RD-40AH TRANSPON DR3580 
215-045 FEATURES Diodes:6-60A Avalanche With M6×46.5mm Battery Post Customer provide negative heat sink REFERENCES.. TRANSPON DR3580-3 	215-048 FEATURES Diodes:6-80A Avalanche With (5/16"-18)×46mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 8744, 8745 FIT UNIT DR2804 8600307 	215-049 FEATURES Diodes:6-80A Avalanche With (5/16"-18)×46mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 8742 8743 8748 FIT UNIT 8600223 WAI/TRANSPON DR2802 
215-051/DC6109AH FEATURES Diodes: 3-60A Avalanche With M6×46.5mm Battery Post Without negative heat sink as DC6109A REFERENCES.. DELCO 10503581 10510904 MOBILETRON RD-40H TRANSPON DR3581 	215-070/DC6111A FEATURES Diodes: 6-60A Avalanche With M8×49mm Battery Post REFERENCES.. DELCO 8400219 8400218 CARGO 114665 	215-090/DC6112A FEATURES Diodes: 6-60A Avalanche With M8×49mm Battery Post Customer provide negative heat sink REFERENCES.. 





215-250 FEATURES Diodes: 6-60A Avalanche With M8×49mm Battery post REFERENCES.. DELCO 8400156 8400158 CARGO 114512 WAI/TRANSPO DR3588 FIT UNIT CA2017IR 	215-340 FEATURES Diodes: 6-50A Avalanche With M8×28.5mm Battery Post(L) With M8×35mm Battery Post(R) Customer provide negative heat sink REFERENCES.. 	215-341 FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post(R) With M8×28.5mm Battery Post(L) Bracket ID: 137.6mm Bearing ID: 38mm Mounting: M10×1.5 REFERENCES.. LESTER 20096 FIT UNIT 113580078 
215-351 FEATURES Diodes: 6-50A Avalanche With M8×28.5mm Battery Post(L) With M8×35mm Battery Post(R) Customer provide negative heat sink REFERENCES.. CARGO CAL42115 LESTER 24096 FIT UNIT 96936136 	215-500 FEATURES Diodes: 6-50A Avalanche With M8×36mm M8×28.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT 13579667 CVS082575 22138815 	217-051 FEATURES Diodes:6-50A Avalanche With M8×29.5mm Battery Post REFERENCES.. 
215-652 FEATURES Diodes:3-80A Avalanche With 5/16"×46mm Battery Post REFERENCES.. LESTER 8747 FIT UNIT 28SI 10519680 	215-700 FEATURES Diodes: 6-50A Avalanche With M8×23.5mm With M8×43mm Customer provide negative heat sink REFERENCES.. DELCO 8600764 LESTER 8761 	215-705 FEATURES Diodes:6-60A Avalanche With M8×23.5mm Battery Post With M8×43mm Battery Post For 24V Alternators Customer provide negative heat sink 28SI REFERENCES.. FIT UNIT 8600620 


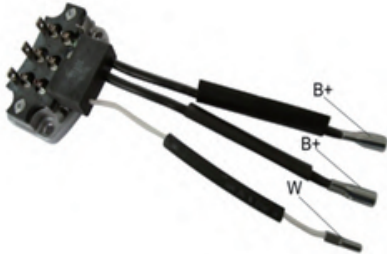
215-740 FEATURES Diodes: 6-35 A Avalanche With M8×43mm For 28V Alternators Customer provide negative heat sink REFERENCES.. DELCO 8600365 LESTER 8730 	215-742 FEATURES Diodes:3-35A Avalanche With M8×43mm Battery Post For 28V Alternators REFERENCES.. LESTER 8730 FIT UNIT 8600365 ADR0464 	215-752 FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post(R) With M8×28.5mm Battery Post(L) Bracket ID: 137.8mm Bearing ID: 38mm Mounting: M10×1.5 REFERENCES.. DELCO 13501187 13579675 KIA 37300-2A850 
215-753 FEATURES Diodes:6-60A Avalanche With M8×28.5mm (L) With M8×35mm (R) Bracket ID: 137.8mm Bearing ID: 38mm Mounting: W/O REFERENCES.. FIT UNIT 13579677 	215-758 FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post (R) With M8×28.5mm Battery Post(L) Customer provide negative heat sink REFERENCES.. LESTER 20980 FIT UNIT 13579677 	215-830 FEATURES Diodes:6-50A Avalanche With M6×38mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CAL30207GS LESTER 20973A FIT UNIT 8600566 8600567 
215-850 FEATURES Diodes: 6-50A Avalanche With(M8+M6)×43mm Battery Post For 28V Alternators Customer provide negative heat sink REFERENCES.. 	215-871 FEATURES Diodes: 6-60A Avalanche With M8×35mm Battery Post(L) With M8×28.5mm Battery Post(R) REFERENCES.. CARGO 115761 LESTER 20096 FIT UNIT 13501719 13580078 	217-010 FEATURES Diodes:6-35 Ampere REFERENCES.. DELCO 1959828 D3978 LESTER 7106 7107 7111 7113 7116 7117 7122 7141 7146 7149 7151 7155 7156 TRANSP0 31-100 

217-020 FEATURES Diodes:6-50A Avalanche With M8×29.5mm Battery Post REFERENCES.. LESTER 8487 FIT UNIT 37300-3C610 	217-021 FEATURES Diodes:12-50A Avalanche With M8×29.5mm Battery Post Bracket ID: 129.5mm Bearing ID: 37mm Mounting: 2-M10×1.25 REFERENCES.. OEM NO AL-1507 LESTER 8487 FIT UNIT 37300-3C610 	217-030 FEATURES Diodes:12-50A Avalanche With M8×29.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 8543 FIT UNIT 37300-2E700 
217-032 FEATURES Diodes:12-50A Avalanche With M8×29.5mm Battery Post Bracket ID: 132.5mm Bearing ID: 37mm Mounting: M10×1.25 REFERENCES.. FIT UNIT 37300-2E700 	217-040 FEATURES Diodes:12-50A Avalanche With M8×29.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11694 FIT UNIT 37300-2G900 	217-042 FEATURES Diodes:12-50A Avalanche With M8×29.5mm Battery Post Bracket ID: 129.5mm Bearing ID: 37mm Mounting: 2-M10×1.25 REFERENCES.. LESTER 11694 FIT UNIT 37300-2G900 
217-060 FEATURES Diodes:6-35A Avalanche With M8×29.5mm Battery Post REFERENCES.. 	217-061 FEATURES Diodes: 12-35A Avalanche With M8×29.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 37300-2E250 	215-03B FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post(R) With M8×28.5mm Battery Post(L) Customer provide negative heat sink REFERENCES.. LESTER 11646 WAI 11044N FIT UNIT 13588127 







215-03C FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post(R) With M8×28.5mm Battery Post(L) Bracket ID: 121.8mm Bearing ID: 38mm Mounting: 9.8mm REFERENCES.. FIT UNIT 94751297 	215-75A FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post(R) With M8×28.5mm Battery Post(L) Customer provide negative heat sink REFERENCES.. FIT UNIT 209134 	215-75B FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post(R) With M8×28.5mm Battery Post(L) Bracket ID: 137.8mm Bearing ID: 38mm Mounting: M10×1.5 REFERENCES.. FIT UNIT A6711540202 
217-031 FEATURES Diodes:6-50A Avalanche With M8×29.5mm Battery Post REFERENCES.. 	217-041 FEATURES Diodes:6-50A Avalanche With M8×29.5mm Battery Post REFERENCES.. 	215-870 FEATURES Diodes:3-60A Avalanche With M6×35mm Battery Post(L) With M6×28.5mm Battery Post(R) REFERENCES.. 
215-880 FEATURES Diodes:12-50A Avalanche With M8 Battery Post For 24V ALternators 40SI REFERENCES.. LESTER 8750 FIT UNIT 8600300 7739 		



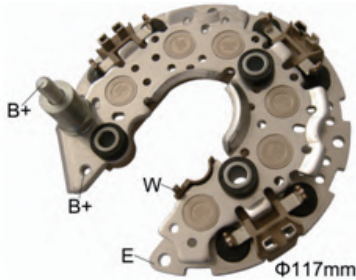
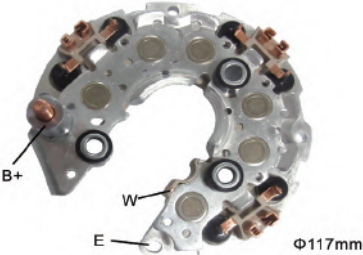
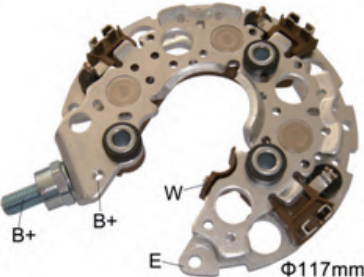
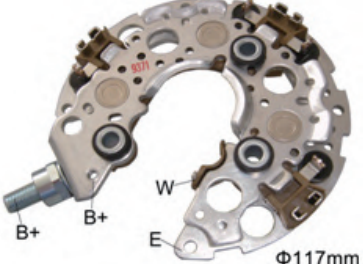

220-010/FD3001DW FEATURES Diodes:8-35 Ampere Diameter OD:133mm Drop-down Stator Terminals REFERENCES.. FORD F5AZ-10304BA CARGO 136209 MOBILETRON RF-043 TRANSPO FR2013 FIT UNIT CA1034IR  W B+ Φ133mm	220-020/FD3002DW FEATURES Diodes:8-50 Ampere Diameter OD:146mm Drop-down Stator Terminals REFERENCES.. FORD F5AZ10304AA CARGO 136210 MOBILETRON RF-053 TRANSPO FR2023  W B+ Φ147mm	221-070/FD4001DW FEATURES Diodes:8-60 Ampere Diameter OD:133mm OE-Style Leadframe REFERENCES.. FORD F5OZ-10300FA CARGO 139668 MOBILETRON RF-063 TRANSPO FR3003 
222-020/FD6000DW(Y) FEATURES Diodes:8-35 Ampere Diameter OD:136mm Drop-down Stator Terminals REFERENCES.. FORD F8WU10A366AAIP CARGO 230842 MOBILETRON RF-103 TRANSPO FR6003  W B+ Φ136mm	222-040/FD6001DW(Y) FEATURES Diodes:8-35 Ampere Diameter OD:136mm Drop-down Stator Terminals REFERENCES.. FORD 98AZ103046EA CARGO 233208 MOBILETRON RF-113 TRANSPO FR6013  W B+ Φ136mm	222-070/FD6002DW(Y) FEATURES Diodes:8-50 Ampere Diameter OD:149mm Drop-down Stator Terminals REFERENCES.. FORD F8AU10A366AAIP CARGO 230870 MOBILETRON RF-123 TRANSPO RF6023  W B+ Φ149mm
222-100/FD6011DW(△) FEATURES Diodes:6-35 Ampere Diameter OD:136mm Drop-down Stator Terminals REFERENCES.. FORD 1F8U10300CD CARGO 233207 MOBILETRON RF-133 TRANSPO FR6073  W B+ Φ136mm	222-120/FD6012DW(△) FEATURES Diodes:6-35 Ampere Diameter OD:136mm Drop-down Stator Terminals REFERENCES.. FORD 1L8Z-10346AB CARGO RF-153 MOBILETRON FR6083  W B+ Φ136mm	223-010/FD61001A FEATURES Diodes: 8-50A Avalanche Diameter OD: 114mm With M6×16.4mm Battery Post REFERENCES.. CARGO 235019 MOBILETRON RF-18HV TRANSPO FR6102  P B+ Φ114mm




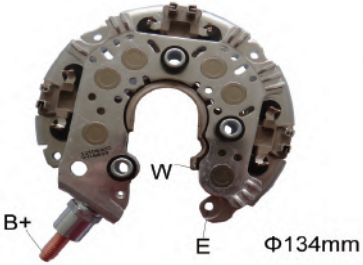

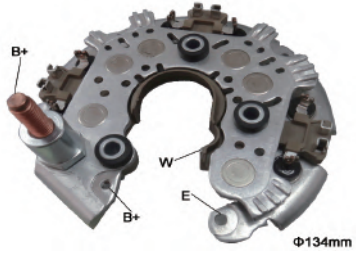
223-020/FD61002A FEATURES Diodes: 8-50A Avalanche Diameter OD: 114mm With M6×39mm Battery Post REFERENCES.. VALEO 3N2110300BB MOBILETRON RF-19H TRANSPO FR6100 	223-030/FD61003A FEATURES Diodes: 8-50A Avalanche Diameter OD: 105mm With M6×39mm Battery Post REFERENCES.. MOBILETRON RF-22HV TRANSPO FR6104 	223-040/FD61004A FEATURES Diodes: 8-50A Avalanche Diameter OD: 105mm With M6×16.4mm Battery Post REFERENCES.. TRANSPO FR6106 
223-080 FEATURES Diodes: 6-60A Avalanche Diameter OD: 114mm With M6×16.4mm Battery Post REFERENCES.. FIT UNIT 6G9N10300TD 	223-100 FEATURES Diodes: 8-50A Avalanche Diameter OD: 105mm With M6 Battery Post REFERENCES.. LESTER 8533 WAI FR6106 FIT UNIT LRA02926 7750-2552 	224-010/FD1001 FEATURES Diodes: 6-25 Ampere Button For 40-65A Alternators Aluminum Heat Sinks REFERENCES.. FORD D6AZ10304A GY-1327 CARGO 131421 MOBILETRON RF-08H TRANSPO FR1070 
224-020/FD1002 FEATURES Diodes: 6-35 Ampere Press-Fit For 40-65A Alternators Aluminum Heat Sinks REFERENCES.. FORD D6AZ10304A GY-1327 TRANSPO FR1040 	224-040/FD1004 FEATURES Diodes: 6-25 Ampere Button For 40-65A Alternators Aluminum Heat Sinks High Temp Circuit Board REFERENCES.. FORD D6AZ10304A GY-1327 TRANSPO FR1080 	224-050/FD1005 FEATURES Diodes: 6-35 Ampere Press-Fit For 70-100A Alternators Aluminum Heat Sinks OE-Type High Temp Circuit Board REFERENCES.. FORD GY-1026 D2OZ10304A CARGO 131422 MOBILETRON RF-09H TRANSPO FR1270 

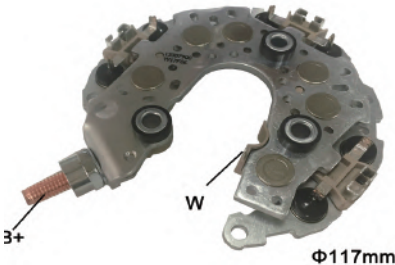


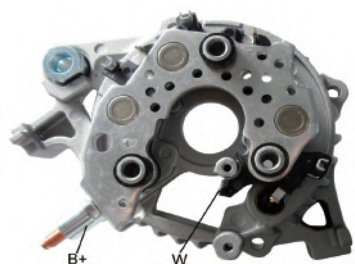

224-060/FD1007	225-011/FD2001	225-020/FD2004
FEATURES Diodes: 6-50 Ampere Press-Fit For 70-100A Alternators Copper Heat Sinks OE-Type High Temp Circuit Board REFERENCES.. FORD E9DZ10304A GY-1345-A CARGO 131430 MOBILETRON RF-16HV TRANSPO FR1290 	FEATURES Diodes:6-35 Ampere Press-Fit REFERENCES.. FORD E6DZ10304 CARGO 131882 MOBILETRON RF-02 TRANSPO FR192PXD FR192 	FEATURES Diodes: 6-50A Ampere Press-Fit Crimp-weld diode terminations REFERENCES.. MOBILETRON RF-23W TRANSPO FR192BBS 


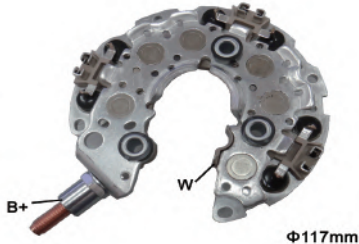
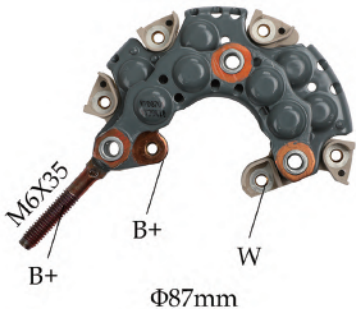
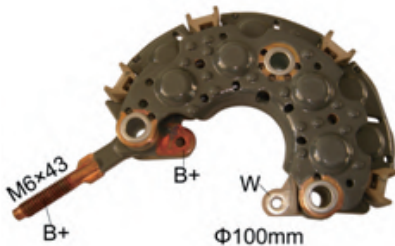
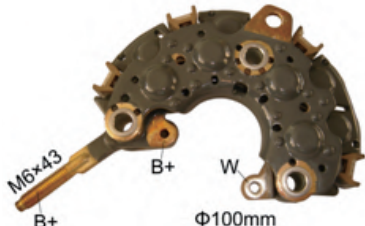
[illegible]

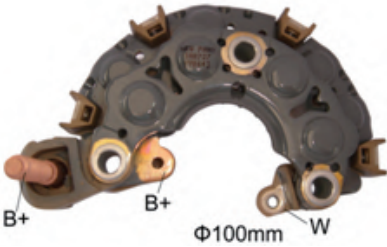
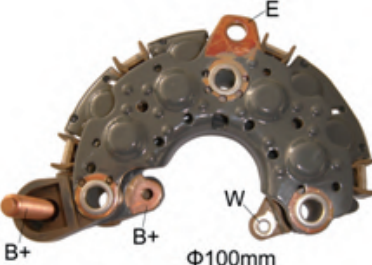
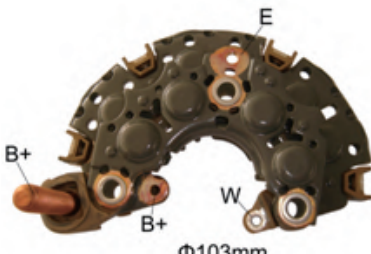
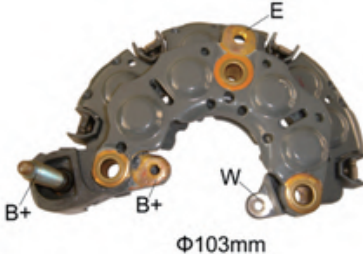
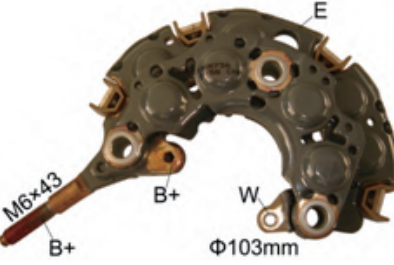

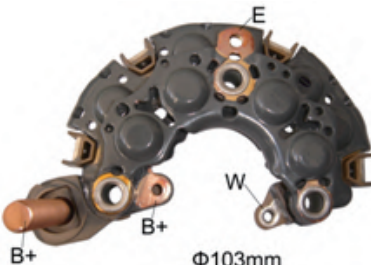
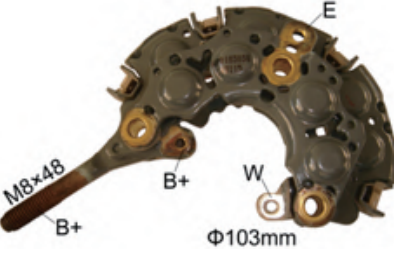

230-020/NPD11501A FEATURES Diodes :6-50A Avalanche Press-Fit Diameter OD : 109mm With M6×33mm Battery Post With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 021580-9220 LESTER 23371 TRANPO INR438 	230-030/NPD11502A FEATURES Diodes :6-50A Avalanche Press-Fit Diameter OD : 109mm With M8×49mm Battery Post With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 021580-9210 MOBILETRON RN-64 	230-060/NPD11701AL FEATURES Diodes: 6-50A Avalanche Press-Fit Diameter OD: 117mm With M6×33mm Battery Post With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 021580-6610 2735703-0070 MOBILETRON RN-46 TRANPO INR430 
230-070/NPD11702AL FEATURES Diodes: 12-35A Avalanche Press-Fit Diameter OD: 117mm With M6×33mm Battery Post With Aluminum Heat sinks For use on: 2003 Toyota Tundra Pickup 4.7L REFERENCES.. NIPPONDENSO 10421-0338 1041-0009 MOBILETRON RN-34 TRANPO INR422 	230-080/NPD11703AL FEATURES Diodes: 12-35A Avalanche Press-Fit Diameter OD: 117mm With M8×49mm Battery Post With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 421000-0120 021997-1123 MOBILETRON RN-30 TRANPO INR420 230-300/NPD11722AL FEATURES With M8×40.5mm Battery Post 	230-082/NPD11729AL FEATURES Diodes: 12-50 A Avalanche Press-Fit Diameter OD: 117mm With M8×49mm Battery Post With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 1401-0026 LESTER 13918 MOBILETRON RN-33 TRANPO INR424 
230-090/NPD11705AL FEATURES Diodes: 6-50A Avalanche Press-Fit Diameter OD: 117mm With M6×34.5mm Battery Post With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 021580-6490 MOBILETRON RN-48 TRANPO INR429 	230-110/NPD11706AL FEATURES Diodes: 12-35 A Avalanche Press-Fit Diameter OD: 117mm With M8×33mm Battery Post With Aluminum Heat sinks REFERENCES.. CARGO 237607 MOBILETRON RN-39 TRANPO INR437 230-100/NPD11706A-1 FEATURES Diodes: 12-35A With Copper Heat sinks 	230-120/NPD11707A FEATURES Diodes: 12-35A Avalanche Press-Fit Diameter OD: 117mm With M8×49mm Battery Post With Copper Heat sinks For use on: 2002-01 Acura MDX3.5L 2004-02 Honda Odyssey 3.5L 2004-03 Honda Pilot 3.5L REFERENCES.. NIPPONDENSO 1401-0026 LESTER 13918 MOBILETRON RN-33 TRANPO INR424 

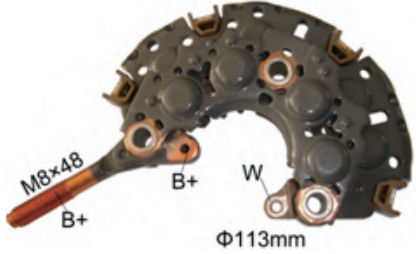

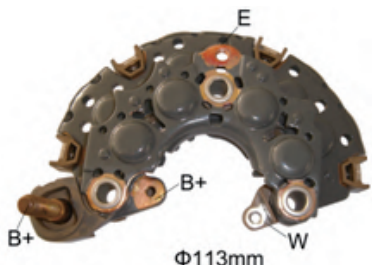
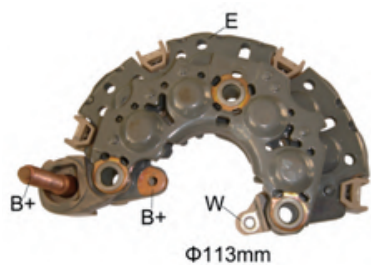
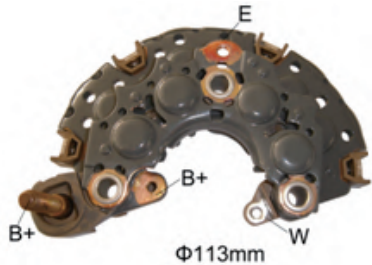
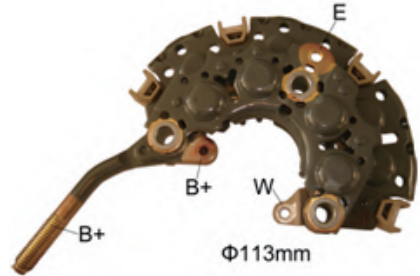
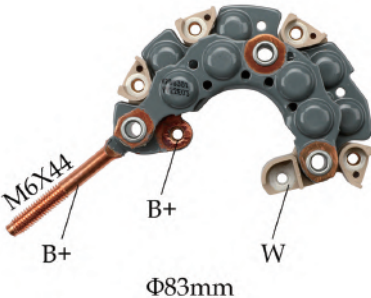
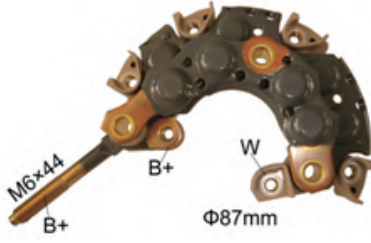
230-140/NPD11708 FEATURES Diodes: 12-35A Avalanche Press-Fit Diameter OD: 117mm With M8×40mm Battery Post With Copper Heat sinks REFERENCES.. CARGO 235589 MOBILETRON RN-47 TRANSPO INR433 	230-150/NPD11708AL FEATURES Diodes: 12-35A With Aluminum Heat sinks 230-210/NPD11711A FEATURES Diodes: 12-35A With M6×33mm Battery Post With Copper Heat sinks REFERENCES.. CARGO 236328 	230-170/NPD11709AL FEATURES Diodes: 12-35A Avalanche Press-Fit Diameter OD: 117mm With M6×34.5mm Battery Post With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 021580-5920 LESTER 104210-3280 104210-3300 104210-4360 MOBILETRON RN-44 TRANSPO INR425 
230-176 FEATURES Diodes: 12-35A Avalanche Diameter OD: 117mm With M6×34.5mm Battery Post With Aluminum Heat sinks REFERENCES.. LESTER 11390 13919 13978 WAI INR425 MOBILETRON RN-60 FIT UNITS 31100-R40-A01 	230-180/NPD11710AL FEATURES Diodes: 6-50A Avalanche Press-Fit Diameter OD: 117mm With M8×33mm Battery Post With Aluminum Heat sinks REFERENCES.. 	230-220/NPD11712AL FEATURES Diodes: 7-50A Avalanche Press-Fit Diameter OD: 117mm With M8×30mm Battery Post With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 104210-351 104210-376 CARGO 237613 MOBILETRON RN-37 TRANSPO INR431 
230-270/NPD11717AL FEATURES Diodes: 12-50A Avalanche Press-Fit Diameter: 117mm With M8×40mm Battery Post With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 421000001 421000002 CARGO 235842 LESTER 11063 13870 13871 13912 MOBILETRON RN-29 TRANSPO INR421 230-272/NPD11717L FEATURES Diodes: 12-35A Ampere Press-Fit Diameter: 117mm With M8×40mm Battery Post With Aluminum Heat sinks 	230-290/NPD11720AL FEATURES Diodes: 7-50A Avalanche Press-Fit Diameter OD: 117mm With M8×40mm Battery Post With Aluminum Heat sinks REFERENCES.. LESTER 13868 MOBILETRON RN-55 TRANSPO INR423 	230-330/NPD11731AL FEATURES Diodes: 12-35A Avalanche Press-Fit Diameter OD: 117mm With M8×38mm Battery Post With Aluminum Heat sinks REFERENCES.. CARGO 333401 235589 AS ARC6053 

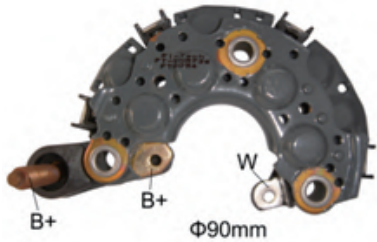
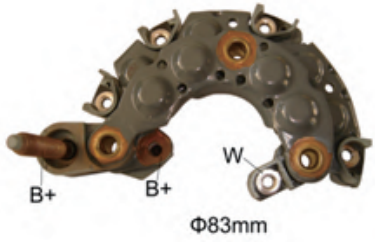
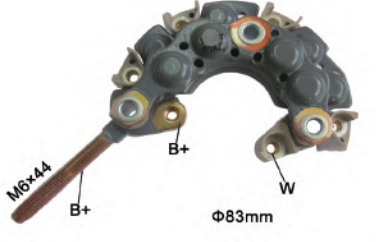
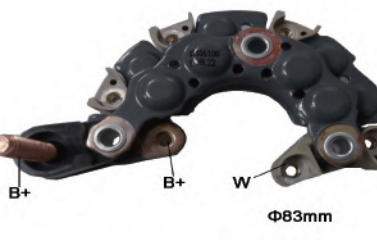
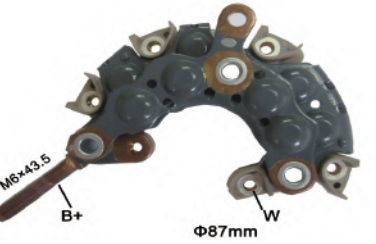
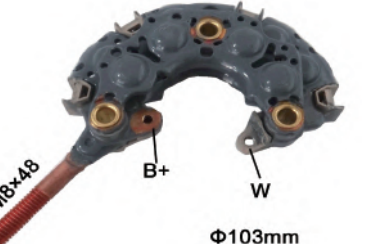
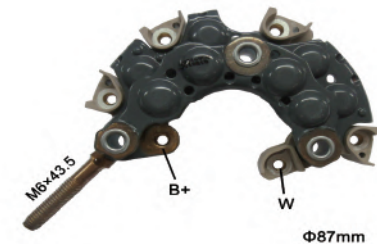
230-370/NPD11735AL FEATURES Diodes: 12-50A Avalanche Press-Fit Diameter OD: 117mm With M8×49mm Battery Post With Aluminum Heat sinks HITACHI Type Diodes REFERENCES.. NIPPONDENSO 021580-6830 104210-2160 LESTER 104210-3090 104210-3081 104210-4560 MOBILETRON RN-54 TRANSPO INR436  Φ117mm	230-380/NPD11736AL FEATURES Diodes: 12-50A Avalanche Press-Fit Diameter OD: 117mm With M6×40mm Battery Post With Aluminum Heat sinks HITACHI Type Diodes REFERENCES.. NIPPONDENSO 021580-5920 LESTER 104210-3280 104210-3300 104210-4360 MOBILETRON RN-44 TRANSPO INR425  Φ117mm	230-381 FEATURES Diodes: 12-50A Avalanche Diameter OD: 117mm With M6×40mm Battery Post With Aluminium Heat sinks REFERENCES..  Φ117mm
230-421 FEATURES Diodes: 12-80A Avalanche Diameter OD: 134mm With M8×40.5mm Battery Post With Aluminium Heat sinks REFERENCES.. MOBILETRON RN-59 TRANSPO INR440  B+ W	230-422 FEATURES Diodes: 12-50A Avalanche Diameter OD: 134mm With M8×40.5mm Battery Post With Aluminium Heat sinks REFERENCES..  B+ W	230-510 FEATURES Diodes: 12-50A Avalanche Diameter OD: 136mm With M8×46mm Battery Post With Aluminum Heat sink REFERENCES.. LESTER 11592 DENSO 421000-7050  B+ W E Φ136mm
230-620 FEATURES Diodes 12-50A Avalanche Diameter OD: 134mm With M8×40mm Battery Post With Aluminum Heat sink REFERENCES.. LESTER 11252  B+ W E Φ134mm	230-710 FEATURES Diodes: 12-50A Avalanche Diameter OD: 117mm With M6×33mm Battery Post With Aluminum Heat sink REFERENCES.. FIT UNIT 11.203.850 INR427  B+ W Φ117mm	230-731 FEATURES Diodes: 12-50A Avalanche Diameter OD: 134mm With M8×46mm Battery Post With Aluminum Heat sinks REFERENCES.. LESTER 11353 FIT UNIT 104210-6191 37300-3F020  B+ W E Φ134mm



230-790 FEATURES Diodes:12-50A Avalanche Diameter OD:117mm With M8×30mm Battery Post REFERENCES.. CARGO 115933 LESTER 20363 FIT UNIT CV6T10300DB  3+ W Φ117mm	230-810 FEATURES Diodes:6-50A Avalanche Diameter OD:115mm With M6×33mm Battery Postt With Aluminum Heat Sink REFERENCES.. FIT UNIT 104210-9940 104210-9680  B+ W Φ115mm	230-811 FEATURES Diodes:6-50A Avalanche With M6×33mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT TG104211-2120 27060-0L190  B+ W
230-815 FEATURES Diodes:6-35A Avalanche With M6×33mm Battery Post Bracket ID: 110mm Bearing ID: 37mm Mounting: M10*1.25 REFERENCES.. FIT UNIT 104210-980  B+ W	230-817 FEATURES Diodes:6-50A Avalanche With M6×33mm Battery Post Bracket ID: 110.8mm Bearing ID: 37mm Mounting: 10.3mm REFERENCES.. FIT UNIT 104210-9940  W B+	230-819 FEATURES Diodes:6-50A Avalanche With M6×33mm Battery Post Bracket ID: 110.8mm Bearing ID: 37mm Mounting: M10*1.25 REFERENCES.. FIT UNIT 104211-2450  B+ W
230-840 FEATURES Diodes:12-35A Avalanche With M6×33mm Battery Postt REFERENCES.. LESTER 11778 MOBILETRON RN-76 FIT UNIT 104211-3531  W B+ Φ117mm	230-850 FEATURES Diodes:7-50A Avalanche With M6×33mm Battery Post REFERENCES.. OEM NO MA084 FIT UNIT NOSSO UNIT: 103-513  B+ W Φ117mm	230-870 FEATURES Diodes:12-50A Avalanche With M8×40.5mm Battery Post Diameter OD:117mm REFERENCES.. CASCO CAL40439 FIT UNIT 104211-8380  B+ W

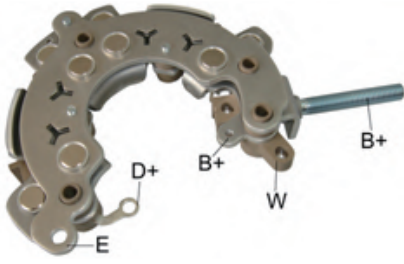

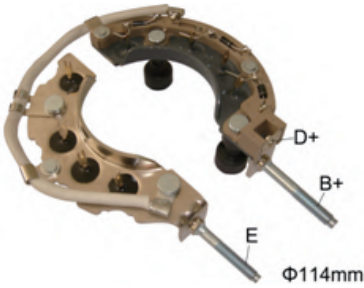
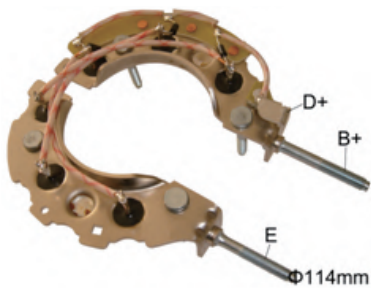

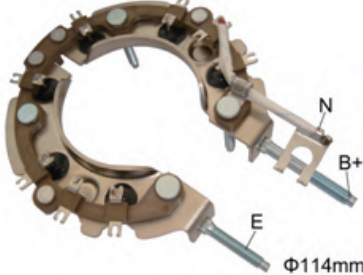
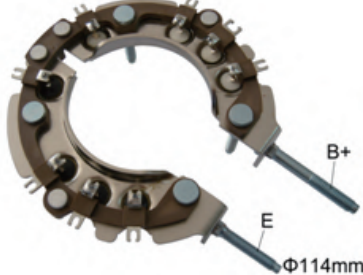
230-881 FEATURES Diodes:6-50A Avalanche With M8×46mm Battery Post Customer provide negative heat sink REFERENCES.. 	230-882 FEATURES Diodes:6-50A Avalanche With M8×38mm Battery Post Bracket ID: 110.8mm Bearing ID: 37mm Mounting: 12.5mm REFERENCES.. FIT UNIT 8982476891 TG104211-2210 	230-960 FEATURES Diodes:12-35A Avalanche Diameter OD:117mm With M6×33mm Battery Post With Aluminum Heat sinks REFERENCES.. 
231-011/NPD8701 FEATURES Diodes: 8-35 Ampere Diameter OD: 87mm With M6 Battery Post (33°) For use on: Tractors TOYOTA 27060-DF020 REFERENCES.. NIPPONDENSO 27060-DF020 	231-060/NPD10001 FEATURES Diodes: 8-50 Ampere Diameter OD: 100mm (31°) For use on: Acura, Honda, Isuzu, Toyota, Sterling REFERENCES.. NIPPONDENSO 021580-2160 CARGO 132082 MOBILETRON RN-13 TRANSPO INR720 	232-CCO FEATURES Diodes:6-50A Avalanche Diameter OD:113mm Press-fit Diodes With M6 Battery Post(36°) With Aluminium Heat sinks REFERENCES.. LESTER 13844, 13959, 23192 TRANSPO INR574 FIT UNIT 101211-7400, 102211-0750, 27060-20200, 27060-20200-84 
232-C90 FEATURES Diodes:6-35 Ampere Press-fit Diodes Diameter OD: 100mm With M6×44mm Battery Post With Aluminum Heat sinks REFERENCES.. OEM NO CA2107IR LESTER 20623 FIT UNIT 102211-6100 	231-100/NPD10004 FEATURES Diodes: 8-50 Ampere Diameter OD: 100mm With M6 Battery Post (31°) With Mounting Hole for Ground Strap REFERENCES.. LESTER 13739 DENSO 021580-5300 TRANSPO INR5028 	231-110/NPD10005 FEATURES Diodes: 6-35Ampere REFERENCES.. TRANSPO INR502 



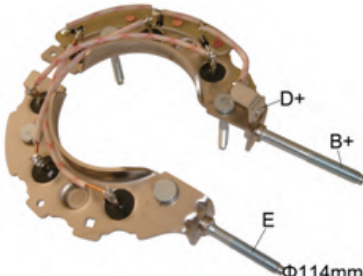

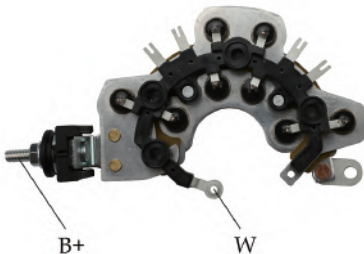
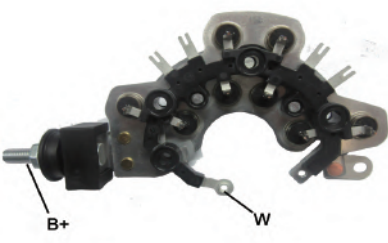
231-120/NPD10006 FEATURES Diodes: 8-50 Ampere Diameter OD: 100mm With M6×44mm Battery Post For use on: Chrysler Laser, LeBaron, New Yorker, Dodge600, Aires Caravan, Plymouth Acclaim, Reliant, Voyager, Turismo REFERENCES.. NIPPONDENSO 021580-4120 CARGO 135415 MOBILETRON RN-14 TRANSPO INR727  Diagram showing a semi-circular rectifier assembly with two B+ terminals on the left and one W terminal on the right. The diameter is labeled as Φ100mm. Terminals are labeled E, B+, B+, and W.	231-130/NPD10007 FEATURES Diodes: 8-50 Ampere Diameter OD: 100mm With M6×40mm Battery Post With Mounting Hole for Ground Strap REFERENCES..  Diagram showing a semi-circular rectifier assembly with two B+ terminals on the left and one W terminal on the right. The diameter is labeled as Φ100mm. Terminals are labeled E, B+, B+, and W.	231-150/NPD10301 FEATURES Diodes: 8-50 Ampere Diameter OD: 103mm With M6×44mm Battery Post With Ground Screw Hole For use on: Chrysler Lebaron, spirt, Dodge Caravan, Daytona, Omni REFERENCES.. NIPPONDENSO 021580-3640 021580-4660 CARGO 135417 MOBILETRON RN-01 TRANSPO INR729  Diagram showing a semi-circular rectifier assembly with two B+ terminals on the left and one W terminal on the right. The diameter is labeled as Φ103mm. Terminals are labeled E, B+, B+, and W.
231-160/NPD10302 FEATURES Diodes: 8-50 Ampere Diameter OD: 103mm With M6×44mm Battery Post With Ground Screw Hole For use on: All 1993 Chrysler LH-Cars REFERENCES.. NIPPONDENSO 100211-8810 CARGO 135418 TRANSPO INR403 231-230/NPD10311 FEATURES Diodes: 6-50 Ampere  Diagram showing a semi-circular rectifier assembly with two B+ terminals on the left and one W terminal on the right. The diameter is labeled as Φ103mm. Terminals are labeled E, B+, B+, and W.	231-190/NPD10304 FEATURES Diodes: 8-50 Ampere Diameter OD: 103mm With M6 Battery Post (31°) REFERENCES.. NIPPONDENSO 100211-8050 CARGO 133672 MOBILETRON RN-03 TRANSPO INR731  Diagram showing a semi-circular rectifier assembly with two B+ terminals on the left and one W terminal on the right. The diameter is labeled as Φ103mm. Terminals are labeled E, B+, B+, and W.	231-200/NPD10305 FEATURES Diodes: 8-50 Ampere Diameter OD: 103mm With M6 Battery Post (31°) With Ground Screw Hole For use on: Geo Prizm, Toyota Celica REFERENCES..  Diagram showing a semi-circular rectifier assembly with two B+ terminals on the left and one W terminal on the right. The diameter is labeled as Φ103mm. Terminals are labeled E, B+, B+, and W.
231-210/NPD10306 FEATURES Diodes: 8-50 Ampere Diameter OD: 103mm With M8×50mm Battery Post With Ground Screw Hole For use on: Volvo 740 Series 2.3L W/Turbo REFERENCES.. NIPPONDENSO 100211-8620 100211-8630 100211-8632 136741 135418 CARGO RN-04 MOBILETRON INR739 TRANSPO  Diagram showing a semi-circular rectifier assembly with two B+ terminals on the left and one W terminal on the right. The diameter is labeled as Φ103mm. Terminals are labeled E, B+, B+, and W.	231-240/NPD10322 FEATURES Diodes: 8-50 Ampere Diameter OD: 103mm With M8 Battery Post (36°) With Ground Screw Hole With Cooper Heat sinks REFERENCES.. NIPPONDENSO 100211-2400 100211-4640 100211-5450 CARGO 135043 TRANSPO INR722 MOBILETRON RN-05  Diagram showing a semi-circular rectifier assembly with two B+ terminals on the left and one W terminal on the right. The diameter is labeled as Φ103mm. Terminals are labeled E, B+, B+, and W.	231-250/NPD10323 FEATURES Diodes: 8-50 Ampere Diameter OD: 103mm With M6 Battery Post (36°) With Ground Screw Hole With Cooper Heat sinks REFERENCES.. NIPPONDENSO 021580-4630 CARGO 237663 TRANSPO INR402 MOBILETRON RN-03 231-261/NPD10324 FEATURES Diodes: 6-50 Ampere: M6 (36°)  Diagram showing a semi-circular rectifier assembly with two B+ terminals on the left and one W terminal on the right. The diameter is labeled as Φ103mm. Terminals are labeled E, B+, B+, and W.

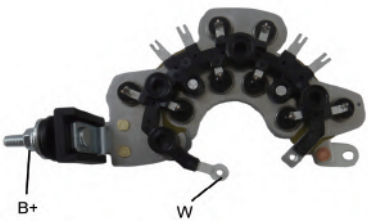


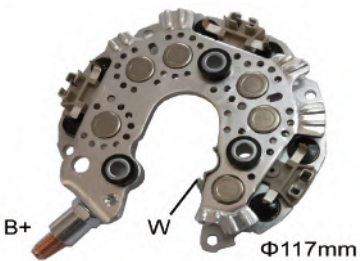

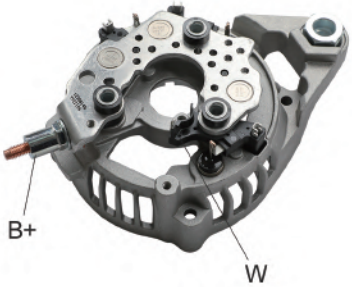
231-270/NPD11301 FEATURES Diodes: 8-50 Ampere Diameter OD: 113mm With M8 Battery Post (36°) For use on: Toyota Land Cruiser REFERENCES.. NIPPONDENSO 021580-4100 021580-4610 021580-4690 CARGO 137874 MOBILETRON RN-08 TRANSPO INR732 	231-280/NPD11302 FEATURES Diodes: 8-50 Ampere Diameter OD: 113mm With M8 Battery Post(36°) With Ground Screw Hole For use on: Lexus SC400, Toyota REFERENCES.. DENSO 021580-4690 CARGO 137874 MOBILETRON RN-11 TRANSPO INR733 	231-300/NPD10303 FEATURES Diodes: 8-50 Ampere Diameter OD: 113mm With M6×44mm Battery Post With Ground Screw Hole REFERENCES.. NIPPONDENSO 121000-4000 CARGO 135416 MOBILETRON RN-02 TRANSPO INR734 
231-320/NPD10305 FEATURES Diodes: 8-50 Ampere Diameter OD: 113mm With M6×44mm Battery Post For use on: Chrysler New Yorker, Dodge Caravan, Dynasty, Acclaim, Dodge Truck, Plymouth Voyager REFERENCES.. NIPPONDENSO 121000-4000 CARGO 135416 MOBILETRON RN-02 TRANSPO INR728 	231-330/NPD11306 FEATURES Diodes: 8-50 Ampere Diameter OD: 113mm With M6 Battery Post (36°) With Ground Screw Hole For use on: Acura REFERENCES.. NIPPONDENSO 121000-4000 CARGO 135416 MOBILETRON RN-02 TRANSPO INR734 	231-350/NPD10308 FEATURES Diodes: 8-50 Ampere Diameter OD: 113mm With M8×47mm Battery Post With Ground Screw Hole REFERENCES.. NIPPONDENSO 021580-2500 021580-4590 CARGO 233246 MOBILETRON RN-16 TRANSPO INR736 
231-360/NPD11310 FEATURES Diodes: 8-50 Ampere Diameter OD: 113mm With M8 Battery Post (9.6°) With Ground Screw Hole REFERENCES.. LESTER 13410 13687 13791 	231-410/NPD8301 FEATURES Diodes: 8-35 Ampere Diameter OD: 83mm With M6 Battery Post (33°) For use on: Industrial REFERENCES.. NIPPONDENSO 021580-3110 CARGO 137872 MOBILETRON RN-18 TRANSPO INR718 	231-470/NPD8702 FEATURES Diodes: 8-35 Ampere Diameter OD: 87mm With M6 Battery Post(32.5°) For use on: Isuzu I-Mark, Toyota Teral , 4-Runner REFERENCES.. NIPPONDENSO 021580-3130 CARGO 132540 MOBILETRON RN-15 TRANSPO INR724 

231-530/NPD9002 FEATURES Diodes: 8-35 Ampere Diameter OD: 90mm With M6×44mm Battery Post For use on: Geo Spectrum, Isuzu I-Mark REFERENCES.. NIPPONDENSO 100211-1220 CARGO 135258 MOBILETRON RN-17 TRANSPO INR726  B+ W Φ90mm	231-560/NPD8303G FEATURES Diodes: 8-25Ampere Dish Diode Diameter OD: 83mm With M6×44mm Battery Post For use on: Industrial REFERENCES.. NIPPONDENSO 100211-4640 CARGO 137873 MOBILETRON RN-26 TRANSPO INR716  B+ B+ W Φ83mm	231-600 FEATURES Diodes: 8-35 Ampere Dish Diode Diameter OD: 83mm With M6 Battery Post (33°) REFERENCES..  M6×44 B+ W Φ83mm
231-610 FEATURES Diodes:8-35 Ampere Diameter OD:83mm With M6×40mm Battery Post REFERENCES..  B+ B+ W Φ83mm	231-640 FEATURES Diodes: 8-35 Ampere Diameter OD: 87mm With M6 Battery Post (33°) REFERENCES.. OEM NO 021580-5590 FIT UNIT 102211-7000 102211-7010 7020  M6×43.5 B+ W Φ87mm	231-660 FEATURES Diodes:8-50 Amper Diameter OD:103mm With M8 Battery Post(36°) With Copper Heat sinks REFERENCES.. CARGO 135043 WAI INR730 MOBILETRON RN-19 FIT UNIT 021580-2950 27357-43110  M8×48 B+ W Φ103mm
231-690 FEATURES Diodes:8-35 Ampere Diameter OD:87mm With M6 Battery Post (33°) REFERENCES.. CARGO 132540 WAI INR737 INR737AL MOBILETRON RN-15 FIT UNIT 27357-72120 27375-72150  M6×43.5 B+ W Φ87mm	232-510/NPD10001L FEATURES Diodes: 8-35 Ampere Press-fit Diodes Diameter OD: 100mm With M6 Battery Post (31°) With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 021580-2160 CARGO 132082 MOBILETRON RN-13 TRANSPO INR720P  M6×43 B+ W Φ100mm	232-530/NPD10002L FEATURES Diodes: 8-35 Ampere Press-fit Diodes Diameter OD: 100mm With M6×40mm Battery Post With Aluminum Heat sinks REFERENCES..  B+ W Φ100mm




232-540/NPD10004L FEATURES Diodes: 8-35Ampere Press-fit Diodes Diameter OD: 100mm With M6 Battery Post (31°) With Mounting Hole for Ground Strap With Aluminum Heat sinks REFERENCES.. LESTER 13739L TRANSPO INR5028P  Φ100mm	232-590/NPD10301L FEATURES Diodes: 8-50 Ampere Press-fit Diodes Diameter OD: 103mm With M6×44mm Battery Post With Ground Screw Hole With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 021580-3640 CARGO 135417 MOBILETRON RN-01 TRANSPO INR729P  Φ103mm	232-610/NPD10303L FEATURES Diodes: 8-50 Ampere Press-fit Diodes Diameter OD: 103mm With M8 Battery Post (36°) With Ground Screw Hole With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 100211-2400 CARGO 135043 MOBILETRON RN-05 TRANSPO INR722P  Φ103mm
232-620/NPD10304L FEATURES Diodes: 8-50 Ampere Press-fit Diodes Diameter OD: 103mm With M6 Battery Post (31°) Press-fit Diodes With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 100211-8050 CARGO 133672 MOBILETRON RN-03 TRANSPO INR731P 232-630/NPD10304L-1 FEATURES Diodes: 8-50 Ampere With M6 Battery Post (36°)  Φ103mm	232-640/NPD10305L FEATURES Diodes: 8-50A Ampere Press-fit Diodes Diameter OD: 103mm With M6 Battery Post (36°) With Ground Screw Hole With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 021580-4630 CARGO 237663 MOBILETRON RN-03 TRANSPO INR402P 232-660/NPD10305L-3 FEATURES Diodes: 6-50A Avalanche With M6 Battery Post (36°)  Φ103mm	232-670/NPD10306L FEATURES Diodes: 8-50 Ampere Press-fit Diodes Diameter OD: 103mm With M8×50mm Battery Post With Ground Screw Hole With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 100211-8620100211-8630 100211-8632 CARGO 136741 135418 MOBILETRON RN-04 TRANSPO INR739P  Φ103mm
232-700/NPD11302L FEATURES Diodes: 8-50 Ampere Press-fit Diodes Diameter OD: 113mm With M8 Battery Post (36°) With Ground Screw Hole With Aluminum Heat sinks REFERENCES.. DENSO 021580-4690 CASCO 137874 MOBILETRON RN-11 TRANSPO INR733P  Φ113mm	232-710/NPD10303L FEATURES Diodes: 8-50 Ampere Press-fit Diodes Diameter OD: 113mm With M6×44mm Battery Post With Ground Screw Hole With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 121000-4000 CARGO 135416 MOBILETRON RN-02 TRANSPO INR734P  Φ113mm	232-720/NPD10305L FEATURES Diodes: 8-50 Ampere Press-fit Diodes Diameter OD: 113mm With M6×44mm Battery Post With Ground Screw Hole With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 121000-4000 CARGO 135416 MOBILETRON RN-02 TRANSPO INR728P  Φ113mm

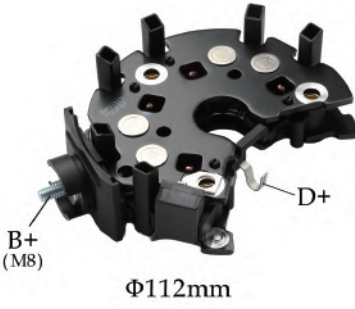



232-730/NPD11306L FEATURES Diodes:8-50 Ampere Press-fit Diodes Diameter OD: 113mm With M6 Battery Post (36°) With Ground Screw Hole With Aluminum Heat sinks REFERENCES.. NIPPONDENSO 121000-4230 MOBILETRON RN-08 TRANSPO INR735P  M6×43 Φ113mm	232-740/NPD10308L FEATURES Diodes:8-50 Ampere Press-fit Diodes Diameter OD: 113mm With M8×47mm Battery Post With Ground Screw Hole With Aluminum Heat sinks REFERENCES.. DENSO 021580-2500 021580-4590 CARGO 233246 MOBILETRON RN-16 TRANSPO INR736P  Φ113mm	232-760/NPD13801 FEATURES Diodes: 8-50 Ampere Press-Fit Diameter OD:138mm With Aluminum Heat sinks With 5/16"×60mm Battery Post With Trio REFERENCES.. NIPPONDENSO 3146-3800  D+ B+ B+ W E
233-030/NPD11401L FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M5×47.5mm Battery Post With M5×35mm Ground Post With M5×41.5mm Mounting Bolt With Aluminum heat sink REFERENCES.. DENSO 021580-2300 CARGO 132649 233-010/NPD11401 FEATURES Diodes: 8-35 Ampere With Cooper Heat sink REFERENCES.. DENSO 021580-2300  B+ E Φ114mm	233-040/NPD11402 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×48.5mm Battery Post With M5×40mm Battery Mounting Bolt With M5×40mm Ground Post With M5×35mm Ground Mounting Bolt With Trio With cooper heat sink REFERENCES..  D+ B+ E Φ114mm	233-060/NPD11404 FEATURES Diodes: 6-50 Ampere Diameter OD: 114mm With M6×48.5mm Battery Post With M5×40mm Ground Post With M5×41.5mm Mounting Bolt With Trio With steel heat sink REFERENCES..  D+ B+ E Φ114mm
233-090/NPD11406L FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×48.5mm Battery Post With M5×35mm Ground Post With M5×41.5mm Mounting Bolt REFERENCES.. NIPPONDENSO 021590-1890 021590-1990 021590-1910 CARGO 132657 233-070/NPD11406 FEATURES Diodes: 6-35 Ampere With Cooper Heat sinks  N B+ E Φ114mm	233-100/NPD11406L-1 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×48.5mm Battery Post With M5×35mm Ground Post With M5×41.5mm Mounting Bolt 233-080/NPD11406-1 FEATURES Diodes: 8-35 Ampere With cooper heat sink M6×48.5/M5×41.5  N B+ E Φ114mm	233-130/NPD11407L FEATURES Diodes: 8-35 Ampere Diodes Diameter OD: 114mm With M6×48.5mm Battery Post With M5×35mm Ground Post With M5×41.5mm Mounting Bolt With Aluminum Heat sink 233-110/NPD11406-1 FEATURES Diodes: 8-35 Ampere With cooper heat sink  B+ E Φ114mm








233-140/NPD11408 FEATURES Diodes: 6-35 Ampere Diameter OD: 100mm With M6×49.5mm Battery Post With M5×36mm Battery Mounting Bolt With M5×38mm Ground Post With M5×38mm Ground Mounting Bolt REFERENCES.. NIPPONDENSO 021600-1340 CARGO 135884 TRANSPO INR400 	233-150/NPD11410 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×48.5mm Battery Post With M5×40mm Battery Mounting Bolt With M5×40mm Ground Post With M5×35mm Ground Mounting Bolt With Trio REFERENCES.. NIPPONDENSO 2735755-4190 	233-160/NPD11411 FEATURES Diodes: 6-50 Ampere Diameter OD: 114mm With M6×55mm Battery Post With M5×40mm Ground Post With M5×41.5mm Mounting Bolt With Trio With steel heat sink REFERENCES.. 
233-220/NPD11419 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×58mm Battery Post With M5×47.5mm Ground Post With M5×35mm Mounting Bolt With Trio REFERENCES.. 	233-230 FEATURES Diodes: 6-35A Ampere Diameter OD: 114mm With M6×47.5mm Battery Post With M5×41.5mm Battery Mounting Bolt With M5×47.5mm Ground Post With M5×38mm Ground Mounting Bolt With Trio REFERENCES.. 	233-240 FEATURES Diodes: 6-35A Ampere Diameter OD: 114mm With M6×47.5mm Battery Post With M5×47.5mm Ground Post With M5×38mm Mounting Bolt REFERENCES.. 
233-320 FEATURES Diodes: 6-50 Ampere Diameter OD: 114mm With M6×44.7mm Battery Post With M5×31.5mm Battery Post REFERENCES.. OEM NO 021600-1380 LESTER 12065 13143 WAI INR717 FIT UNIT 021000-7410 	234-010 FEATURES Diodes: 8-35A Avalanche With M6×37.8mm Battery Post For 24V Alternators REFERENCES.. FIT UNIT 27060-EW030 	234-020 FEATURES Diodes: 8-35A Avalanche With M8×49mm Battery Post For 24V Alternators REFERENCES.. FIT UNIT 27060-EW010 






234-030 FEATURES Diodes:8-35A Avalanche With M6×36mm Battery Post For 24V Altemators REFERENCES..  B+ W	230-A40 FEATURES Diodes: 12-50A Avalanche Diameter OD: 117mm With M6×44mm Battery Post With Aluminum Heat sinks REFERENCES..  B+ W E $\Phi 117\text{mm}$	230-AJ0 FEATURES Diodes: 12-50A Avalanche Diameter OD: 124mm With M8×35mm Battery Post With Aluminum Heat sinks REFERENCES..  B+ W
230-AL0 FEATURES Diodes: 12-35A Avalanche Diameter OD: 117mm With M8×35mm Battery Post With Aluminum Heat sinks REFERENCES.. FIT UNIT 104211-3680  B+ W $\Phi 117\text{mm}$	230-AR0 FEATURES Diodes:6-50A Avalanche Diameter OD:115mm With M8×46mm Battery Post With Aluminum Heat Sink REFERENCES.. FIT UNIT 104210-9870  B+ W	230-AY0 FEATURES Diodes: 12-35A Avalanche Diameter OD: 117mm With M8×46mm Battery Post With Aluminum Heat sinks REFERENCES.. FIT UNITS 104211-4110  B+ W
230-B00 FEATURES Diodes: 12-35A Avalanche Diameter OD: 117mm With M8×40.5mm Battery Post With Aluminum Heat sinks REFERENCES.. LESTER 21238 WAI 11672N FIT UNIT 104211-4340  B+ W E	232-AP0 FEATURES Diodes:6-50 Ampere Press-fit Diodes Diameter OD: 103mm With M6 Battery Post (31°) Press-fit Diodes With Aluminum Heat sinks REFERENCES.. MOBILETRON RN-36 TRANPO INR406P  M6×43 $\Phi 103\text{mm}$	230-814 FEATURES Diodes:6-50A Avalanche With M6×33mm Battery Post Bracket ID: 110.8mm Bearing ID: 37mm Mounting: M10*1.25 REFERENCES.. TOYOTA UNIT 27060-0L190 DENSO UNIT 104211-2120  B+ W




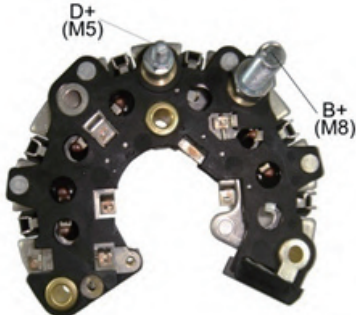



[illegible]


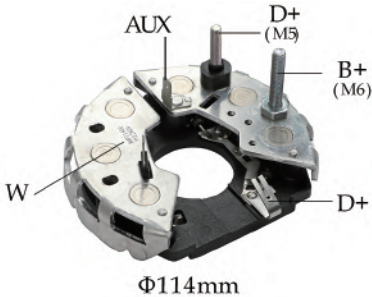

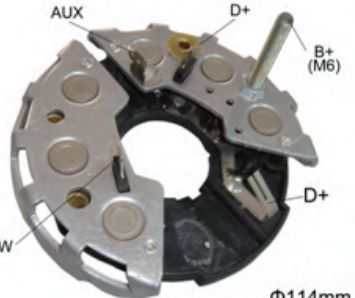





240-010/BHP11201(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 112mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319552 1127320852 CARGO 135176 138077 230242 MOBILETRON RB-122H TRANSPO IBR852 FIT UNIT CA733IR  Φ112mm	240-060/BHP11203(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 112mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127320850 CARGO 135439 TRANSPO IBR850  Φ112mm	240-070/BHP11204(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 112mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127320807 1127319593 CARGO 137333 MOBILETRON RB-121H TRANSPO IBR844 FIT UNIT CA1044IR 240-030/BHP11202(Y) FEATURES Diodes: 8-50A Avalanche With M8×30mm Battery Post With Trio 240-032/BHP11202B(Y) FEATURES Diodes: 8-35A Avalanche For 28V Alternators With M8×30mm Battery Post With Trio  Φ112mm
240-080/BHP11204(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 112mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319560 1127319011 CARGO 135440 MOBILETRON RB-134H 240-090/BHP11205-2(Y) FEATURES Diodes: 6-50A Avalanche With M8×30mm Battery Post With Trio  Φ112mm	240-100/BHP11206(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 112mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319021 1127319673 CARGO 135446 240-110/BHP11206-1(Y) FEATURES Diodes: 8-50A Avalanche With M8×30mm Battery Post With Trio  Φ112mm	240-140/BHP11207(Y) FEATURES Diodes: 6-35A Avalanche Diameter OD: 112mm With M6×30mm Battery Post With Trio With 1.2 Kilohm Resistor REFERENCES.. BOSCH 1127319570 CARGO 137507 MOBILETRON RB-105H TRANSPO IBR570  Φ112mm
240-160/BHP11209(Y) FEATURES Diodes: 6-35A Avalanche Diameter OD: 112mm With M8×40.5mm Battery Post With Trio REFERENCES.. BOSCH 1127319623 1127320882 CARGO 137257 MOBILETRON RB-101H TRANSPO IBR882 240-170/BHP11209-1(Y) FEATURES Diodes: 8-35A Avalanche With M8×40.5mm Battery Post With Trio  Φ112mm	240-180/BHP11210B(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 112mm With M8 Battery Post Without Trio For 28V Alternators For use on : 0 123 325 5500 REFERENCES.. BOSCH 1127319792  Φ112mm	240-190/BHP11211(Y) FEATURES Diodes: 8-35A Avalanche Diameter OD: 112mm With M6×30mm Battery Post With Trio 240-200/BHP11211-1(Y) FEATURES Diodes: 6-35A Avalanche With M6×30mm Battery Post With Trio  Φ112mm




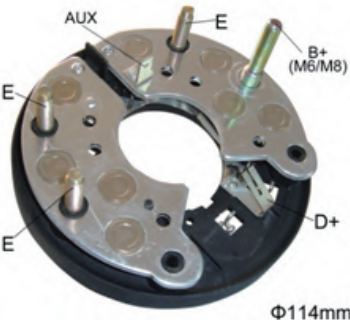
240-210/BHP11213(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 112mm With M6 Battery Post With Trio REFERENCES.. BOSCH 1127319671 CARGO 139571 TRANSPO IBR671 	240-220/BHP11214(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 112mm With M8×40.5mm Battery Post Without Trio REFERENCES.. BOSCH 1127319514 1127319563 CARGO 139030 	240-230/BHP11215(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 112mm With M8 Battery Post With Trio REFERENCES.. BOSCH 1127319694 MOBILETRON RB-36H TRANSPO IBR694 FIT UNIT CA1155IR 240-240/BHP11215-1(Y) FEATURES Diodes: 8-50A Avalanche With M8 Battery Post With Trio 
240-270/BHP11219A(Y) FEATURES Diodes: 6-35A Avalanche Diameter OD: 112mm With M8×20mm Battery Post With Trio With Capacitor 240-280/BHP11220A(Y) FEATURES Diodes: 8-60A Avalanche With M8×20mm Battery Post With Trio 	240-290/BHP12201(Y) FEATURES Diodes: 14-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio For use on : Mercedes Benz REFERENCES.. BOSCH 1127319552 1127320852 MOBILETRON RB-29H TRANSPO IBR834 FIT UNIT CA1089IR CARGO 135605 240-291/BHP12201B(Y) FEATURES Diodes: 14-35 A Avalanche With M8×30mm Battery Post With Trio For 28V Alternators 	240-300/BHP12201-1(Y) FEATURES Diodes: 12-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio For use on : Mercedes Benz REFERENCES.. BOSCH 1127319029 1127319639 CARGO 230614 TRANSPO IBR824 FIT UNIT 13359 
240-310/BHP12202(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio For use on: VW Corado , Golf, Passat, Jetta, Eurovan REFERENCES.. BOSCH 1127319576 CARGO 138074 TRANSPO IBR854 240-320/BHP12202-1(Y) FEATURES Diodes: 12-50A Avalanche With M8×30mm Battery Post With Trio 	240-330/BHP12204(Y) FEATURES Diodes: 12-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319690 1127320860 CARGO 137259 TRANSPO IBR860 FIT UNIT 1991-00 BMW W/140A 	240-340/BHP12205(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319744 CARGO 230241 TRANSPO IBR744 FIT UNIT RB-33H 


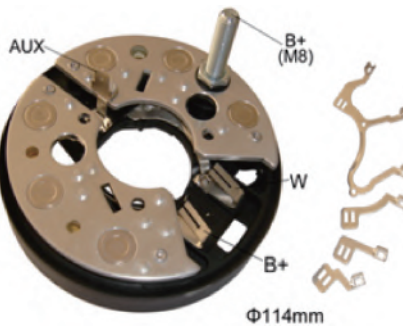
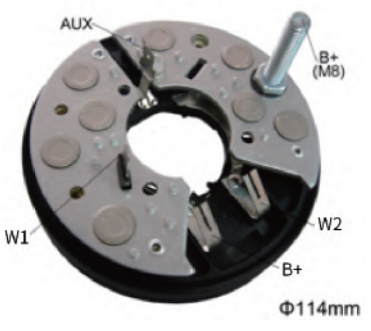
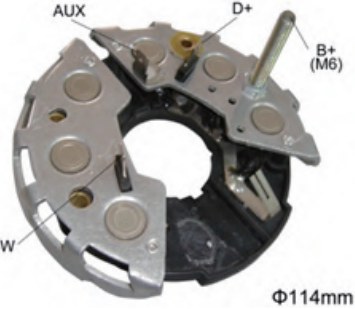
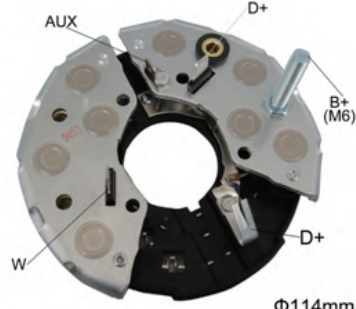
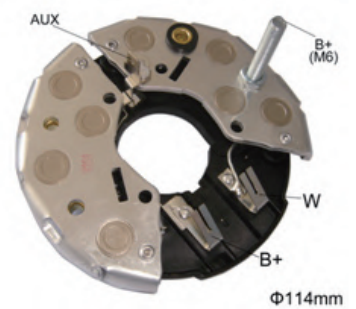
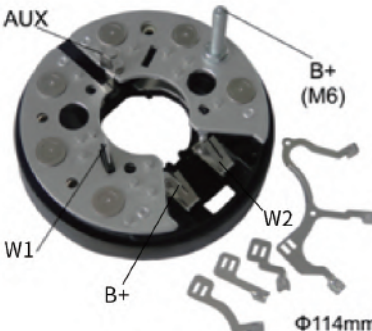
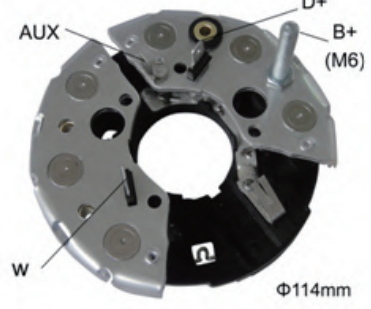
240-350/BHP12206(Y) FEATURES Diodes: 14-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319712 1127319641  Φ122mm	240-360/BHP12207(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319802 CARGO 231643  Φ122mm	240-370/BHP12208(△) FEATURES Diodes: 12-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319700 F00M053201 CARGO 237268 TRANPO IBR700 240-372/BHP12208B(△) FEATURES Diodes: 12-50A Avalanche For 28V Alternators  Φ122mm
240-380/BHP12208-1(△) FEATURES Diodes: 12-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With “W” terminal With Trio 240-381/BHP12208B-1(△) FEATURES Diodes: 12-50A Avalanche For 28V Alternators  Φ122mm	240-390/BHP12209(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319734 1127319572 CARGO 230093  Φ122mm	240-400/BHP12210(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319501 1127319578 1127319752 CARGO 230173 TRANPO IBR501  Φ122mm
240-410/BHP12211B(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M8×40.5mm Battery Post Without Trio For 28V Alternators REFERENCES.. BOSCH 1127319721 CARGO 234357  Φ122mm	240-430/BHP12212(Y) FEATURES Diodes: 12-50A Avalanche Diameter OD: 122mm With M8×40.5mm Battery Post Without Trio REFERENCES.. BOSCH 1127319692 CARGO 139252 TRANPO IBR692  Φ122mm	240-440/BHP12213B(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M8 Battery Post Without Trio For 28V Alternators REFERENCES.. BOSCH 1127319794 CARGO 234333  Φ122mm

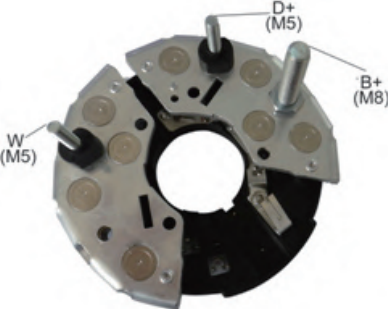








240-470/BHP12215(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio 240-472/BHP12215B(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio For 28V Alternators  Φ122mm	240-480/BHP12216(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH NO 1 127 319 534, 1 127 319 535 AUDI NO 028 903 359F EGI NO 77BO-212, 77BO-319, 77BO-350 ERA NO 216162 240-490/BHP12216-1(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M6×30mm Battery Post With Trio  Φ122mm	240-500/BHP12216(△) FEATURES Diodes: 12-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319771 CARGO 233923  Φ122mm
240-510/BHP12219(△) FEATURES Diodes: 12-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319631 CARGO 138081  Φ122mm	240-520/BHP12220(Y) FEATURES Diodes: 12-50A Avalanche Diameter OD: 122mm With M8×40.5mm Battery Post With Trio REFERENCES.. BOSCH 1127320860 1127319689 TRANPO IBR860 240-530/BHP12220-1(Y) FEATURES Diodes: 14-50A Avalanche Diameter OD: 122mm With M8×40.5mm Battery Post With Trio  Φ122mm	240-540/BHP12226(△) FEATURES Diodes: 12-60A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319782 CARGO 234839 TRANPO IBR709  Φ122mm
240-550/BHP12228A(Y) FEATURES Diodes: 14-50A Avalanche Diameter: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319805 1127319806  Φ122mm	240-720/ISK001 FEATURES Diodes: 8-35A Avalanche With M8×39.5mm Battery Post With M8×28.5mm Trio Post With Trio With Capacitor REFERENCES.. ISKRA 16903314 CARGO 231050 MONARK 093231050 	240-740/ISK002 FEATURES Diodes: 8-35A Avalanche With M8×54mm Battery Post With M5×32mm Trio Post With M5×32mm W Post With Trio With Capacitor REFERENCES.. ISKRA 16903507 CARGO 231472 240-780/ISK006 FEATURES Diodes: 6-35A Avalanche 









240-750/ISK003 FEATURES Diodes:8-35A Avalanche With M6×54mm Battery Post With M5×32mm Trio Post With M5×32mm W Post With Trio With Capacitor REFERENCES.. 	240-760/ISK004B FEATURES Diodes: 8-35A Avalanche With M8×35.5mm Battery Post With M4×19.8mm Trio Post With M5×21.3mm W Post With Trio With Capacitor For 24V Alternators REFERENCES.. 	240-770/ISK005 FEATURES Diodes: 6-35A Avalanche With M8×54mm Battery Post With M5×32mm Trio Post With Trio With Capacitor REFERENCES.. 
240-790/ISK007 FEATURES Diodes:8-35A Avalanche With M8×39.5mm Battery Post With M5×28.5mm Trio Post With Trio With Capacitor REFERENCES.. 	240-800/ISK008 FEATURES Diodes: 6-35A Avalanche With M6×54mm Battery Post With M5×32mm Trio Post With Trio With Capacitor REFERENCES.. 	240-940(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319002 1127319003 1127319518 1127319645 1127319647 1127320818 TRANSPO FIT UNIT IBR649 CA1069 
242-010/BHP11401 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×52.5mm Battery Post With M4×42mm Trio Post With M5×48mm W-Post With Trio For use on : DAF, Mercedes Benz REFERENCES.. BOSCH 1127011098 1127011101 1127320344 CARGO 133138 TRANSPO IBR313 MOBILETRON RB-08H  Φ114mm	242-020/BHP11402 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×52.5mm Battery Post With M4×42mm Trio Post With M5×48mm W-Post With Trio REFERENCES.. BOSCH 1127011095 1127011096 CARGO 131468 TRANSPO IBR314 MOBILETRON RB-07H  Φ114mm	242-040/BHP11403 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M8×52.5mm Battery Post With M4×42mm Trio Post With M5×48mm W-Post With Trio For use on: Mercedes Benz Trucks REFERENCES.. BOSCH 1127320909 1127041132 CARGO 133995 MOBILETRON RB-14H TRANSPO IBR315 242-041/BHP11403B FEATURES Diodes: 14-50A Avalanche For 24V Alternators  Φ114mm




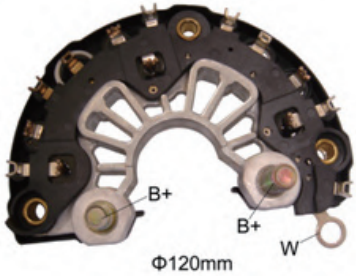
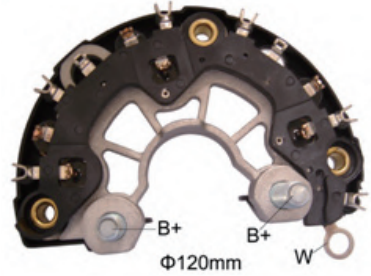
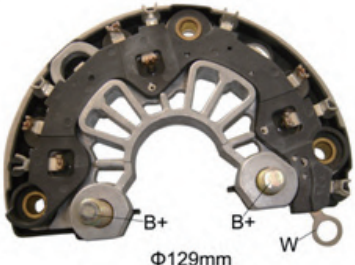
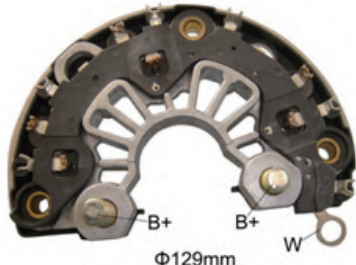
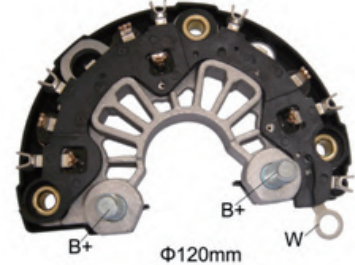
242-060/BHP11404 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With Trio REFERENCES.. BOSCH 1127011112 1127011113 1127011114 1127011115 CARGO 130603 MOBILETRON RB-01HA TRANSPO IBR303  Φ114mm	242-080/BHP11406 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×50.4mm Battery Post With M5×43.7mm Trio Post With Trio REFERENCES.. BOSCH 1127320665 CARGO 132667  Φ114mm	242-120/BHP11411 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With Trio For use on : Audi, VW Diesel REFERENCES.. BOSCH 1127011116 1127320506 CARGO 131559 MOBILETRON RB-03HA TRANSPO IBR302 FIT UNIT CA345IR  Φ114mm
242-130/BHP11412 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×52.5mm Battery Post With Trio For use on: Volvo Diesel REFERENCES.. BOSCH 1127011131 CARGO 134341 MOBILETRON RB-16H TRANSPO IBR301  Φ114mm	242-150/BHP11413 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×52.5mm Battery Post With Trio REFERENCES.. BOSCH 1127011138 1127320501 CARGO 130602 MOBILETRON RB-02H TRANSPO IBR304  Φ114mm	242-160/BHP11414 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M8×52.5mm Battery Post With M5×43.7mm Trio Post With Trio For use on: Audi Saab Scania, VW REFERENCES.. BOSCH 1127320601 1127320661 CARGO 132668 230361 MOBILETRON RB-05H TRANSPO IBR316  Φ114mm
242-170/BHP11415 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M5×43.7mm W-Post With Trio For use on: Ford Cortina, Granada, Scorpio + Cargo Van REFERENCES.. BOSCH 1127011139 1127320372 CARGO 132669 MOBILETRON RB-06HA TRANSPO IBR317  Φ114mm	242-180/BHP11416 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×52.5mm Battery Post With M5×43.7mm Trio Post With M5×43.7mm W-Post With Trio REFERENCES.. BOSCH 9121147302 0120488000 CARGO 133997 MOBILETRON RB-17H TRANSPO IBR320  Φ114mm	242-190/BHP11417 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With (M8+M6) ×54.6 Battery Post With M5×43.7mm Trio Post With Trio REFERENCES.. BOSCH 1127320651 1127320677 CARGO 133996 MOBILETRON RB-19H TRANSPO IBR321  Φ114mm







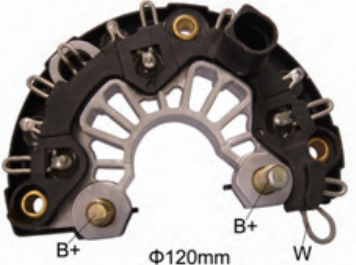
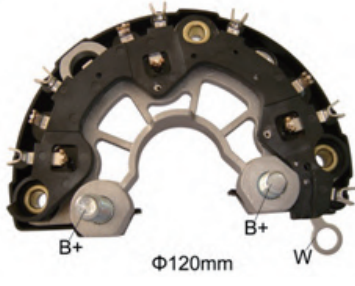
242-200/BHP11418 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With (M8+M6) ×54.6mm Battery Post With M5×43.7mm Trio Post With Trio REFERENCES.. BOSCH 1127320914 CARGO 133998 MOBILETRON RB-18H TRANSPO IBR322  Φ114mm	242-210/BHP11419 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×52.5mm Battery Post With M4×42mm Trio Post With M5×43.7mm W-Post With Trio REFERENCES.. BOSCH 1127320667 CARGO 135890 MOBILETRON RB-38H TRANSPO IBR667  Φ114mm	242-220/BHP11420 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With Trio For use on : 1988-91 Ford Sierra 1.8L REFERENCES.. BOSCH 1127320903 CARGO 137726 MOBILETRON RB-86H TRANSPO IBR903  Φ114mm
242-230/BHP11421 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M8×52.5mm Battery Post With M5×43.7mm Trio Post With Trio For use on: Audi, VW Diesel REFERENCES.. BOSCH 1127320664 1127320665 CARGO 132667 MOBILETRON RB-04H TRANSPO IBR311  Φ114mm	242-240/BHP11422 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×52.5mm Battery Post With M4×42mm Trio Post With Trio For use on : VW REFERENCES.. BOSCH 1127320668 CARGO 133994 MOBILETRON RB-15H TRANSPO IBR319  Φ114mm	242-250/BHP11424 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×52.5mm Battery Post With Trio For use on : Komatsu 1982-89 Audi Quattro Turbo REFERENCES..  Φ114mm
242-260/BHP11425 FEATURES Diodes: 8-50 Ampere Diameter OD: 114mm With (M8+M6) ×48mm Battery Post With Trio REFERENCES..  Φ114mm	242-271/BHP11426A FEATURES Diodes: 6-50A Avalanche Diameter OD: 114mm With M6×50mm Battery Post Without Trio REFERENCES.. BOSCH 9120067027 9121067385 CARGO 136591 MOBILETRON RB-83H TRANSPO IBR388 242-270/BHP11426 FEATURES Diodes: 6-50A Ampere Diameter OD: 114mm With M6×50mm Battery Post Without Trio 242-280/BHP11426-1 FEATURES Diodes: 8-50A Ampere Diameter OD: 114mm With M6×50mm Battery Post Without Trio  Φ114mm	242-281/BHP11426A-1 FEATURES Diodes: 6-50A Avalanche Diameter OD: 114mm With M6×50mm Battery Post Without Trio Without "W" Terminal REFERENCES.. BOSCH 9121067379 MOBILETRON RB-81H TRANSPO IBR323  Φ114mm


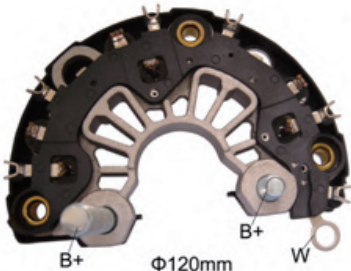
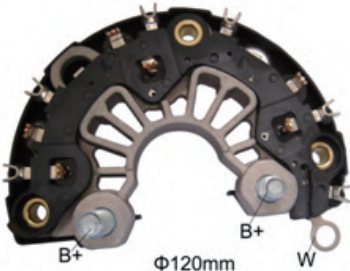
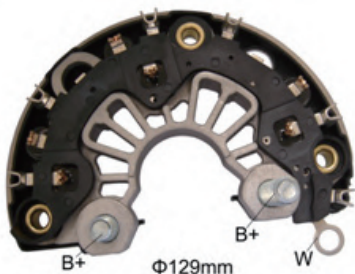
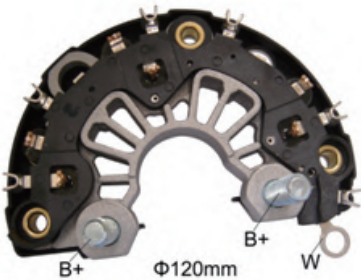

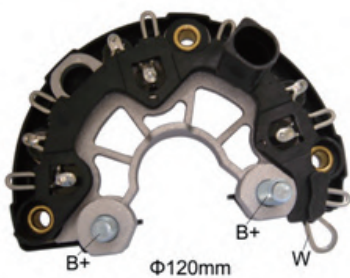
242-351/BHP11427A FEATURES Diodes: 8-50 A Avalanche Diameter OD: 114mm With M8×52.5mm Battery Post With M5×48mm Trio Post With Trio REFERENCES.. BOSCH 1127320692 CARGO 138165 MOBILETRON RB-80H TRANSPO IBR324 242-350/BHP11427 FEATURES Diodes: 8-50 Ampere 	242-360/BHP11428A FEATURES Diodes: 6-35 A Avalanche Diameter OD: 114mm With M8×52mm Battery Post Without Trio 242-390/BHP11432A FEATURES Diodes: 8-35 A Avalanche 	242-370/BHP11430A FEATURES Diodes: 8-35A Avalanche Diameter OD: 114mm With M8×52mm Battery Post Without Trio REFERENCES.. BOSCH 9121067067 9121067388 CARGO 234953 MOBILETRON RB-84H TRANSPO IBR308 
242-380/BHP11431 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M8×52.5mm Battery Post With Trio REFERENCES.. 	242-400/BHP11433A FEATURES Diodes: 8-50A Avalanche Diameter OD: 114mm With M6×52.5mm Battery Post With Trio REFERENCES.. OEM NO W060-69 WAI NO IBR276 BOSCH F 010 LD1 067 	242-430/BHP11435 FEATURES Diodes: 8-50A Ampere Diameter OD: 114mm With M6×50mm Battery Post Without Trio REFERENCES.. CARGO 136556 LESTER 13300 FIT UNIT 9-120-060-020 E9YJ-10346A 
242-480/BHP11440 FEATURES Diodes: 6-35A Ampere Diameter OD: 114mm With M6×50.4mm Battery Post With Trio REFERENCES.. BOSCH 0120488313 0120488312 	242-530/BHP11445A FEATURES Diodes: 6-35A Avalanche Diameter OD: 114mm With M6×52.5 Battery Post REFERENCES.. BOSCH 9120061105 	242-540/BHP11446 FEATURES Diodes: 6-50 A Ampere Diameter OD: 114mm With M6×50mm Battery Post With Trio REFERENCES.. 






242-590/BHP11451A FEATURES Diodes OD: 8-50A Avalanche Diameter: 114mm With M8×55.5mm Battery Post With M5×39mm Trio Post With M5×39mm W-Post With Trio REFERENCES.. 	242-620/BHP121001 FEATURES Diodes: 8-35 Ampere Diameter OD: 120mm With M8×52mm Battery Post With Trio For use on : Audi, VW REFERENCES.. BOSCH 1127320701 CARGO 232172 13400 MOBILETRON RB-76H TRANSPO IBR350 	242-630/BHP121002 FEATURES Diodes: 8-35 Ampere Diameter OD: 120mm With M8×52mm Battery Post With Trio FOR USE ON: Audi, Fiat, Ford REFERENCES.. BOSCH 112732700 112732730 CARGO 132103 MOBILETRON RB-51H TRANSPO IBR351 
242-650/BHP121004 FEATURES Diodes: 8-35 Ampere Diameter OD: 120mm With M8×52mm Battery Post With M5×48mm Trio Post With M5×48mm W-Post With Trio For use on : BMW, Ford, Merkur REFERENCES.. BOSCH 1127320706 CARGO 134002 MOBILETRON RB-53H TRANSPO IBR353 	242-660/BHP121005 FEATURES Diodes: 8-35 Ampere Diameter OD: 120mm With M8×52mm Battery Post With M5×48mm Trio Post With Trio For use on : Audi, BMW, Opel, Mercedes Benz, VW REFERENCES.. BOSCH 1127320705 1127320710 1127320723 CARGO 138082 233778 MOBILETRON RB-54H TRANSPO IBR354 	242-670/BHP121006 FEATURES Diodes: 8-35 Ampere Diameter OD: 120mm With M8×52mm Battery Post With M5×48mm Trio Post With Trio Without Capacitor REFERENCES.. BOSCH 1127320708 1127320731 CARGO 134003 MOBILETRON RB-56H TRANSPO IBR357 242-760/BHP121015 FEATURES With Capacitor 
242-680/BHP121007 FEATURES Diodes: 8-35 Ampere Diameter OD: 120mm With (M8+M6) ×54.6 Battery Post With M5×48mm Trio Post With Trio For use on : Volvo REFERENCES.. BOSCH 1127320712 1127320735 CARGO 138164 MOBILETRON RB-58H TRANSPO IBR712 	242-690/BHP121008 FEATURES Diodes: 8-35 Ampere Diameter OD: 120mm With (M8+M6) ×54.6 Battery Post With M5×48mm Trio Post With Trio For use on : Volvo 240 ,740 ,760 , 940 Series REFERENCES.. BOSCH 1127320716 3515707 CARGO 138164 MOBILETRON RB-58H TRANSPO IBR712 	242-700/BHP121009 FEATURES Diodes: 8-35 Ampere Diameter OD: 120mm With M8×52mm Battery Post With M5×48mm Trio Post With Trio For use on: BMW 525i,735i REFERENCES.. BOSCH 1127320720 1127320741 CARGO 136372 MOBILETRON RB-77H TRANSPO IBR720 









242-710/BHP121010 FEATURES Diodes: 6-35 Ampere Diameter OD: 120mm With (M8+M6) ×54.6mm Battery Post With M5×48mm Trio Post With Trio For use on : Volvo 740, 760, 780, 940 Series REFERENCES.. BOSCH 1127320713 CARGO 138620 MOBILETRON RB-59H TRANSPO IBR713  Φ120mm	242-720/BHP121011 FEATURES Diodes: 6-35 Ampere Diameter OD: 120mm With M8×52mm Battery Post With M5×48mm Trio Post With Trio For use on : BMW, Opel, Saab REFERENCES.. BOSCH 1127320702 1127320709 1127320722 CARGO 133261 MOBILETRON RB-55H TRANSPO IBR355  Φ120mm	242-730/BHP121012 FEATURES Diodes: 6-35 Ampere Diameter OD: 120mm With (M8+M6) ×54.6mm Battery Post Without Trio For use on : Chrysler, Dodge, Plymouth REFERENCES.. BOSCH 1127320718 1127320719 CARGO 138987 MOBILETRON RB-75H TRANSPO IBR329  Φ120mm
242-740/BHP121013 FEATURES Diodes: 8-35 A Avalanche Diameter OD: 120mm With M8×52mm Battery Post With M4×48mm Trio Post With M5×48mm W-Post With Trio REFERENCES.. BOSCH 1127320753 CARGO 137724 231451 TRANSPO IBR753 242-741/BHP121013A FEATURES Diodes: 8-35 A Avalanche 242-742/BHP121013B FEATURES Diodes: 8-35 A Avalanche For 24V Alternators  Φ120mm	242-743 FEATURES Diodes: 8-35 Ampere Diameter OD: 120mm With M8×52mm Battery Post With M4×48mm Trio Post With M5×48mm W-Post With Trio REFERENCES..  Φ120mm	242-950/BHP12501 FEATURES Diodes: 8-50 Ampere Diameter OD: 125mm With (M8+M6) ×54.6mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With Trio REFERENCES.. BOSCH 1127320590 CARGO 134609 MOBILETRON RB-63H TRANSPO IBR590  Φ125mm
242-970/BHP12503 FEATURES Diodes: 14-50 Ampere Diameter OD: 125mm With 7/16" Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With M5 W-Post With Trio REFERENCES..  Φ125mm	242-980/BHP12504 FEATURES Diodes: 14-50 Ampere Diameter OD: 125mm With M10×63mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With M5 W-Post With Trio REFERENCES.. BOSCH 1127320920 TRANSPO IBR954 242-981/BHP12504A FEATURES Diodes: 14-50 A Avalanche REFERENCES.. TRANSPO IBR954A  Φ125mm	242-992/BHP12505B FEATURES Diodes: 8-35 A Avalanche Diameter OD: 125mm With 7/16" Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With M5 W-Post With Trio REFERENCES.. BOSCH 1127320957 TRANSPO IBR957 242-990/BHP12505 FEATURES Diodes: 8-50 Ampere  Φ125mm



243-031/BHP12057(△) FEATURES Diodes: 6-50Ampere Diameter OD: 120mm With M8×26mm Battery Post(L) With M8×22mm Battery Post(R) REFERENCES.. BOSCH NO F 00M 133 223 F 00M 133 291 UTM NO EB2811A EB2811B EB2811C ZAUFER 312N10047Z DAF NO 1450806 IVECO NO 42537054 MAN NO 51-26109-0008 GAUSS NO GA1433  B+ Φ120mm W	243-040/BHP12017(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M6×35mm Battery Post(L) With M8×22mm Battery Post(R) REFERENCES.. BOSCH 0124315019 0124315027 TRANSPO IBR233 FIT UNIT CA1639IR 243-190/BHP12027(Y) FEATURES Diodes: 8-50A Avalanche With M6×35mm Battery Post(L) With M8×22mm Battery Post(R) 243-390/BHP12048(Y) FEATURES Diodes: 6-50A Avalanche With M8×38mm Battery Post(L) With M8×22mm Battery Post(R)  B+ B+ Φ120mm W	243-060/BHP12019(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×22mm Battery Post(R) REFERENCES.. CARGO 231714 FIT UNIT CA1544IR 243-070/BHP12019-1(Y) FEATURES Diodes: 8-50A Avalanche REFERENCES.. FIT UNIT CA1470IR  Φ120mm
243-063(Y) FEATURES Diodes:6-50A Avalanche (Y) Diameter OD: 120mm With M8×32mm Battery Post (L) With M8×26mm Battery Post (R) REFERENCES.. LESTER 12780 23251 TRANSPO IBR2251 FIT UNIT 0124325087  B+ B+ W	243-080/BHP12020(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. BOSCH 0124325051 F00M123226 CARGO 235546 MOBILETRON RB-926H TRANSPO IBR229  B+ B+ Φ120mm W	243-090/BHP12021(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. FIT UNIT CA1378IR 243-120/BHP12024(Y) FEATURES Diodes: 8-50A Avalanche  B+ B+ Φ120mm W
243-101/BHP12022HD(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×32mm Battery Post(L) With M8×22mm Battery Post(R) With 129 mm Negative heat sink) REFERENCES.. BOSCH 0124525028  B+ B+ Φ129mm W	243-110/BHP12023(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M6×35mm Battery Post(R) REFERENCES.. BOSCH 0124525028  B+ B+ Φ129mm W	243-130/BHP12025(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post (L) With M8×32mm Battery Post (R) 243-131/BHP12025B(△) FEATURES Diodes: 6-35A Avalanche For 24V Alternators  B+ B+ Φ120mm W

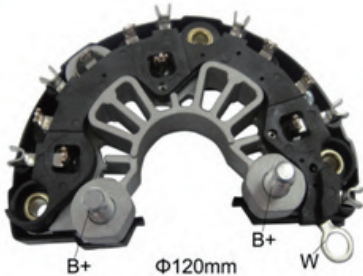
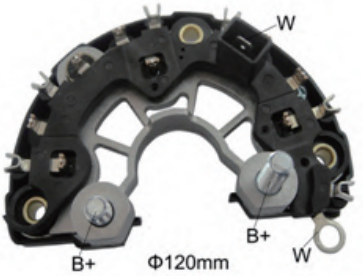
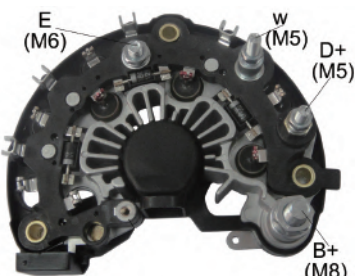
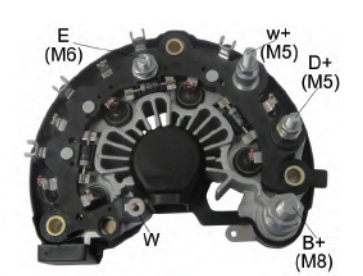
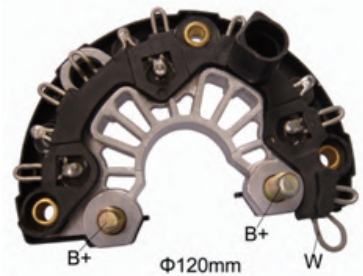
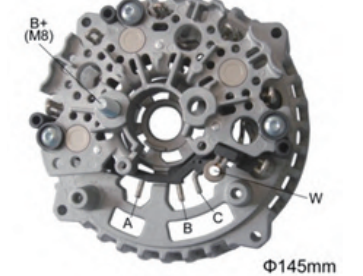
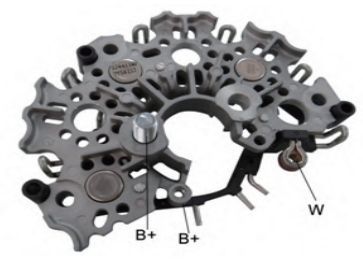
243-134(△) FEATURES Diodes: 6-35A Avalanche Diameter OD: 120mm With M8×41.9mm Battery Post(R) With M8×32mm Battery Post(L) REFERENCES.. FIT UNIT 0124555036 	243-140/BHP12025-1(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. BOSCH F00M133201 F00M133205 CARGO 133921 MOBILETRON RB-119H TRANSPO IBR201 243-400/BHP12049HD(△) FEATURES Diodes: 6-60A Avalanche With M8×22mm Battery Post(L) With M6×47mm Battery Post(R) 	243-150/BHP12025-2(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×22mm Battery Post(R) REFERENCES.. BOSCH F00M133201 F00M133205 CARGO 133921 MOBILETRON RB-119H TRANSPO IBR201 243-380/BHP12047HD(△) FEATURES Diodes: 6-50A Avalanche With M6×35mm Battery Post(L) With M8×22mm Battery Post(R) 
243-170/BHP12026(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M 133291 F00M 133223 EGI NO 77BO-223 CQ NO CQ1080546 DIXIE NO 3160-2021 	243-172/BHP12026B(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×34.5mm Battery Post(L) With M8×22mm Battery Post(R) For 28V Alternators With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133291 F00M133223 243-820/BHP12092B(△) FEATURES Diodes: 6-50A Avalanche With M8×34.5mm Battery Post(L) With M8×34.5mm Battery Post(R) For 28V Alternators 	243-174/BHP12056(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×34.5mm Battery Post(L) With M8×22mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133257 F00M133293 TRANSPO IBR257 LESTER 11217 
243-200/BHP12030(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. BOSCH F00M133207 0124515035 CARGO 230374 TRANSPO IBR207 243-201/BHP12030HD(△) FEATURES Diodes: 6-60A Avalanche 	243-210/BHP12031(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) 243-550/BHP12067(Y) FEATURES Diodes: 8-50A Avalanche 	243-220/BHP12032(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×22mm Battery Post(R) REFERENCES.. BOSCH F00M123337 TRANSPO IBR2237 MOBILETRON RB-115H 









243-230/BHP12033(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×34.5mm Battery Post(R) REFERENCES.. 	243-251/BHP12035HD(△) FEATURES Diodes: 6-60Ampere Diameter OD: 120mm With M8×59.5mm Battery Post(L) With M8×22mm Battery Post(R) REFERENCES.. BOSCH F00M133225 MOBILETRON RB-180HV TRANSPO IBR256 LESTER 11235 11314 13843 13920 	243-260/BHP12036B(△) FEATURES Diodes: 6-35A Avalanche Diameter OD: 120mm With M8×34.5mm Battery Post(L) With M8×22mm Battery Post(R) For 28V Alternators 243-262/BHP12036BHD(△) FEATURES Diodes: 6-50A Avalanche With M8×34.5mm Battery Post(L) With M8×22mm Battery Post(R) For 28V Alternators 
243-270/BHP12037(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×22mm Battery Post(L) With M8×35mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133237 F00M133340 TRANSPO IBR237 	243-280/BHP12038B(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×34.5mm Battery Post(L) With M8×35mm Battery Post(R) For 28V Alternators REFERENCES.. 	243-290/BHP12039B(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×34.5mm Battery Post(L) With M8×34.5mm Battery Post(R) For 28V Alternators REFERENCES.. BOSCH NO F 00M 133 223 F 00M 133 291 OEM NO 1101-068RS 3.34091 DAF NO 1450806 IVECO NO 42537054 MAN NO 51-26109-0008 HUCO NO 133762 
243-300/BHP12040(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×22mm Battery Post(L) With M8×34.5mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. 	243-320/BHP12041(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. BOSCH F00M133202 TRANSPO IBR225 MOBILETRON RB-171HV 	243-330/BHP12042(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. 


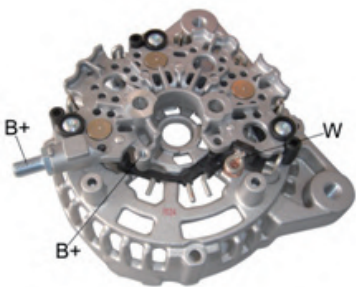
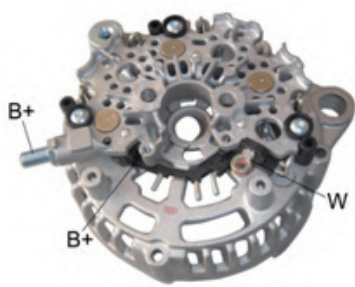



243-340/BHP12043(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. 	243-351/BHP12044HD(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×22mm Battery Post(L) With M8×50mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133226 TRANSPO IBR226 	243-371/BHP12046HD(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×22mm Battery Post(L) With M6×51mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133277 TRANSPO IBR277 MOBILETRON RB-954H 
243-420/BHP12051HD(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×26mm Battery Post(L) With M8×50mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. 	243-430/BHP12052(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M6×35mm Battery Post(R) With big insulator hole REFERENCES.. BOSCH F00M123234 F00M123335 CARGO 235052 TRANSPO IBR234 FIT UNIT CA1636IR 243-240/BHP12034(Y) FEATURES Diodes: 8-50A Avalanche 	243-440/BHP12053(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. 
243-452/BHP12054HD(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×34.5mm Battery Post(L) With M8×34.5mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133237 TRANSPO IBR237 	243-460/BHP12055(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×32mm Battery Post(R) 243-540/BHP12066(Y) FEATURES Diodes: 6-50A Avalanche With M8×32mm Battery Post(L) With M8×32mm Battery Post(R) 	243-480/BHP12059(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 120mm With M8×26mm Battery Post(L) With M8×34.5mm Battery Post(R) REFERENCES.. 

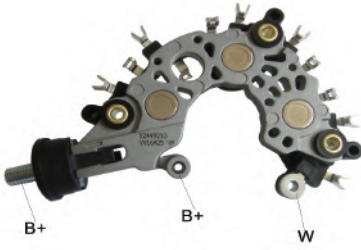



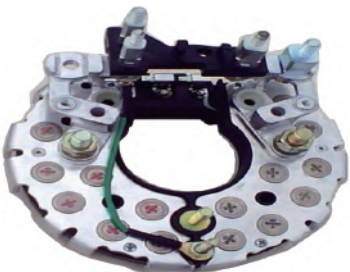
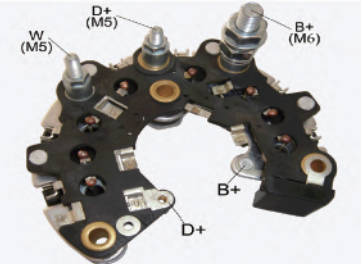

243-500/BHP12062(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×32mm Battery Post(R) 243-490/BHP12060B(Y) FEATURES Diodes: 8-35A Avalanche With M8×32mm Battery Post(L) With M8×32mm Battery Post(R) For 28V Alternators  B+ Φ120mm W	243-510/BHP12063(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×35mm Battery Post(R) 243-920/BHP120103(Y) FEATURES Diodes: 8-50A Avalanche With M8×26mm Battery Post(L) With M8×22mm Battery Post(R)  B+ Φ120mm W	243-522/BHP12064HD(Δ) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M6×47mm Battery Post(L) With M8×47mm Battery Post(R) With 129 mm negative heat sink REFERENCES.. BOSCH F00M133279 TRANSPO IBR279 243-521/BHP12064B(Δ) FEATURES Diodes: 6-50A Avalanche With M6×47mm Battery(L) With M8×47mm Battery(R) For 28V Alternators REFERENCES.. TRANSPO FIT REGULATOR IB260 FIT COVER C-006  B+ Φ129mm W
243-531/BHP12065HD(Δ) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×34.5mm Battery Post(L) With M8×34.5mm Battery Post(R) REFERENCES..  Φ120mm	243-570/BHP12068B(Δ) FEATURES Diodes: 6-50A Avalanche For 28V Alternators REFERENCES.. BOSCH F00M133224 CARGO 235051 TRANSPO IBR224 243-020/BHP12016B(Δ) FEATURES Diodes: 6-35A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×22mm Battery Post(R) For 28V Alternators  B+ Φ120mm B+ W	243-580/BHP12070(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. BOSCH F00M123227 F00M123244 F00M123201 MOBILETRON RB-116H TRANSPO IBR244  B+ Φ120mm B+ W
243-610/BHP12072(Δ) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×26mm Battery Post(L) With M8×34.5mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133265 CARGO 236706 MOBILETRON RB-175HD  B+ Φ129mm B+ W	243-620/BHP12073(Δ) FEATURES Diodes: 6-60A Ampere Diameter OD: 129mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M123215 F00M133218 CARGO 235218 MOBILETRON RB-929H TRANSPO IBR215  B+ Φ129mm B+ W	243-640/BHP12074(Δ) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×28.5mm Battery Post(L) With M8×26mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133208 F00M133266 CARGO 233469 LESTER 23302 20005 21790 21791 TRANSPO IBR266  B+ Φ129mm B+ W







243-650/BHP12075(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES..  Φ120mm	243-660/BHP12076(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×26mm Battery Post(L) With M8×26mm Battery Post(R) With 129 mm Negative heat sink REFERENCES..  Φ129mm	243-680/BHP12077(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×35mm Battery Post(R) REFERENCES.. BOSCH F00M113200 CARGO 139915 MOBILETRON RB-118H TRANSPO IBR1200  Φ120mm
243-711/BHP12080HD(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×35mm Battery Post(L) With M8×22mm Battery Post(R) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133274 F00M133292 TRANSPO IBR274  Φ129mm	243-713(△) FEATURES Diodes: 6-60A Avalanche (△) Diameter OD: 129mm With M8×41.9mm Battery Post(L) With M8×28.5mm Battery Post(R) For 28V Alternators REFERENCES.. FIT UNIT 0124655214  Φ129mm	243-720/BHP12081A(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. BOSCH F00M133209  Φ120mm
243-740/BHP12083HD(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M6×35mm Battery Post(L) With M6×35mm Battery Post(R) REFERENCES.. BOSCH F00M123233 F00M123234 CARGO 233524 TRANSPO IBR233-2  Φ120mm	243-770/BHP12086(Y) FEATURES Diodes: 6-50 Avalanche Diameter OD: 120mm With M8×22mm Battery Post (L) With M8×34.5mm Battery Post (R) REFERENCES.. BOSCH F00M144002  Φ120mm	243-840/BHP12094(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×32mm Battery Post(L) With 129 mm Negative heat sink REFERENCES.. BOSCH F00M133298 TRANSPO IBR212  Φ120mm


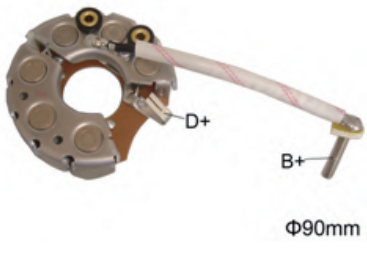
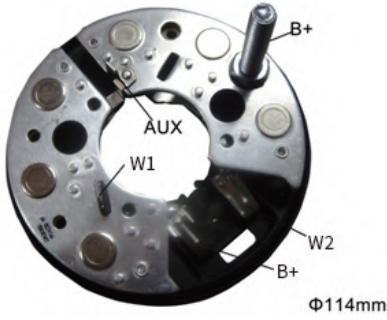



243-850/BHP12095(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 120mm With M8×26mm Battery Post(L) With M8×26mm Battery Post(R) REFERENCES.. BOSCH F00M113230 	243-890/BHP12099(Y) FEATURES Diodes : 8-50A Avalanche Diameter OD:120mm With M8×22mm Battery Post (L) With M8×34.5mm Battery Post (R) REFERENCES.. 	243-900/BHP120100(Y) FEATURES Diodes : 6-50A Avalanche Diameter OD:120mm With M8×32mm Battery Post (L) With M8×22mm Battery Post (R) REFERENCES.. 
243-910/BHP120101B(△) FEATURES Diodes : 6-50A Avalanche Diameter OD:120mm With M8×26mm Battery Post(L) With M8×26mm Battery Post(R) For 28V Alternators REFERENCES.. 	243-931/BHP120104HD FEATURES Diodes : 6-60AAvalanche With M8×40mm Battery Post With M6×32.5mm Ground Post With M5 W-Post With Trio With Capacitor REFERENCES.. 	243-932 FEATURES Diodes : 8-50A Avalanche With M8×40mm Battery Post With M6×32.5mm Ground Post With M5 W-Post With Trio With Capacitor For 28V Alternators REFERENCES.. FIT UNIT 11.203.262 
243-970/BHP120109(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×34.5mm Battery Post(R) REFERENCES.. BOSCH F00M123255 TRANPO IBR208 	244-050/BHP12801-006 FEATURES Diodes: 6-60A Avalanche Diameter OD: 145mm With M8×32mm Battery Post With "W" Terminal Customer provide Negative heat sink REFERENCES.. BOSCH F00M314001 0121615003 TRANPO IBR4001 	244-110/BHP12801AH FEATURES Diodes:3-50A Avalanche With M8×32mm Battery Post REFERENCES.. 








244-115 FEATURES Diodes:6-50A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1474 LESTER 11495 FIT UNIT 0121715078 0121715178 	244-116 FEATURES Diodes:6-80A Avalanche With (M8+M6)×53mm Battery Post With Trio REFERENCES.. CARGO 113791 LESTER 23910 FIT UNIT 2655517 600028 TA000A55601 	244-117 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Bracket ID: 143mm Bearing ID: 38mm Mounting: W/O REFERENCES.. OEM NO AL-1219 LESTER 11223 FIT UNIT 0121715002 
244-140/BHP12804-163 FEATURES Diodes: 6-60A Avalanche With M8×15mm Battery Post Customer provide Negative heat sink REFERENCES.. BOSCH 0121615007 	244-148 FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1317 LESTER 11347 FIT UNIT 0121615014 	244-149 FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 23979 TRANSPO IBR4007 FIT UNIT 0121615008 
244-170/BHP12805-163 FEATURES Diodes: 6-60A Avalanche With M8×32mm Battery Post Customer provide Negative heat sink REFERENCES.. 	244-177 FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 22589 FIT UNIT 121615032 	244-178 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114809 LESTER 11221 TRANSPO IBR4033 FIT UNIT 0121715103 2605717A FG18T033 TG17C019 


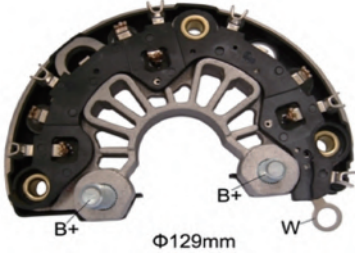


244-179 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115671 LESTER 20008 FIT UNIT 36000223 8697585 	244-180/BHP12806-163 FEATURES Diodes: 6-60A Avalanche With M8×15mm Battery Post Customer provide Negative heat sink REFERENCES.. 	244-190/BHP12807-163 FEATURES Diodes: 6-60A Avalanche With M8×15mm Battery Post Customer provide Negative heat sink REFERENCES.. BOSCH F00M314004 TRANSPO IBR4004 
244-191 FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Bracket ID: 142.8mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 11336 FIT UNIT F00M 314004 	244-220/BHP12811-197 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide Negative heat sink REFERENCES.. 	244-280/BHP12815A FEATURES Diodes: 6-60A Avalanche Diameter OD: 128mm With M8×23.5mm Battery Post REFERENCES.. BOSCH F00M346135 
244-330/BHP12820A(Y) FEATURES Diodes: 6-50 A Avalanche Without Trio REFERENCES.. 	244-420/BHP14508A1 FEATURES Diodes: 6-60A Avalanche With M8×30mm Battery Post REFERENCES.. LESTER 13815 TRANSPO IBR2201 	244-696 FEATURES Diodes:6-50A Avalanche With M8×24.5mm Battery Post Customer provide negative heat sink REFERENCES.. 









244-723 FEATURES Diodes:6-80A Avalanche With M8×36mm Battery Post Customer provide negative heat sink REFERENCES..  Labels: B+, W2, W1	244-920/BHP12827AH(Y) FEATURES Diodes:3-60A Avalanche With M8×15mm Battery Post REFERENCES.. FIT UNIT 23100-3TS3A  Labels: B+, B+, W	244-927 FEATURES Diodes:6-35A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 272220890  Labels: B+, B+, W
244-940/BHP12828A FEATURES Diodes: 6-60A Avalanche Diameter: 128mm With M8×23.5mm Battery Post REFERENCES.. BOSCH 0125711103 244-B80 FEATURES With M8×40.5mm Battery Post 	244-951(Y) FEATURES Diodes:3-50A Avalanche With M8×30mm Battery Post REFERENCES.. FIT UNIT F000BL0676  Labels: B+, B+, W	244-952 (Y) FEATURES Diodes:6-50A Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT F000BL0676  Labels: B+, B+, W
24Z-010 FEATURES Diodes: 18-50A Avalanche REFERENCES.. 	240-A20 FEATURES Diodes: 8-35 A Avalanche With M6×44mm Battery Post With M5×32mm Trio Post With M5×32mm W Post With Trio With Capacitor REFERENCES.. OEM NO 11.204.583 AAK5181 CARGO 113610 LESTER 12683 FIT UNITS ALT20603  Labels: D+ (M5), W (M5), B+ (M6), B+, D+	242-A20/BHP12506 FEATURES Diodes: 8-50 Ampere Diameter OD: 125mm With M10×63mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With M5 W-Post With Trio REFERENCES.. BOSCH 9127337304  Labels: D+ (M4), AUX, B+ (M10), W (M5), B- (M6), D+, Φ125mm

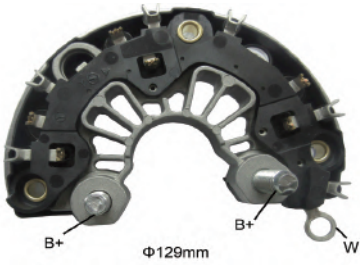

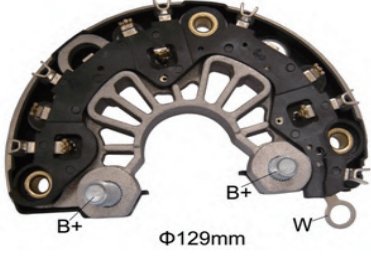
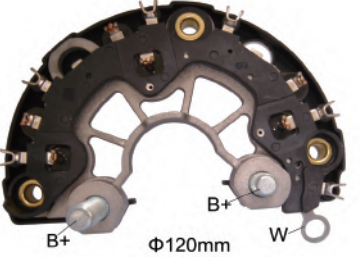
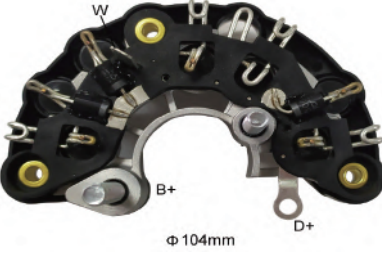
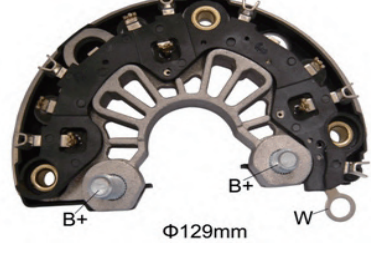


242-A40/BHP12509 FEATURES Diodes: 14-50 Ampere Diameter OD: 125mm With M8×52mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With M5 W-Post With Trio For use on : DAF, Mercedes, Saab scania, Volvo-White Truck REFERENCES.. BOSCH 1127320654 1127320961 CARGO 139581 335530 LESTER 12135 12167 12293  Φ125mm	242-A70/BHP12510 FEATURES Diodes: 14-50 Ampere Diameter OD: 125mm With M8×52mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With Trio For use on : Mercedes, Saab scania, Volvo Truck REFERENCES.. BOSCH 1127320361 CARGO 133530 MOBILETRON RB-72H TRANSPO IBR340  Φ125mm	242-A80/BHP12511 FEATURES Diodes: 8-50 Ampere Diameter OD: 125mm With M8×52mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With M5 W-Post With Trio REFERENCES.. BOSCH 1127320602 CARGO 136832 TRANSPO IBR955 242-A82/BHP12511B FEATURES Diodes: 8-35 A Avalanche For 24V Alternators REFERENCES.. BOSCH 1127320989 CARGO 136832 TRANSPO IBR959  Φ125mm
242-AG0/BHP12517 FEATURES Diodes: 8-50 Ampere Diameter OD: 125mm With (M8+M6) ×54.6mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With M5×25mm N-Post With M5 W-Post REFERENCES..  Φ125mm	242-AH0/BHP12519 FEATURES Diodes: 8-50 Ampere Diameter OD: 125mm With (M8+M6) ×54.6mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With Trio REFERENCES.. BOSCH 1127320517 1127320603 CARGO 231218 TRANSPO IBR517  Φ125mm	242-AK0/BHP12522B FEATURES Diodes: 8-50 A Avalanche Diameter: 125mm With M8×52mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With M5 W-Post With Trio For 24V Alternator REFERENCES..  Φ125mm
242-AL0/BHP14501 FEATURES Diodes: 12-50 Ampere Diameter OD: 145mm With M8×52mm Battery Post With M5×34.5mm Trio Post With M8×52mm Ground Post With 3-35A Diode Trio For use on : Bus, Industrial REFERENCES.. BOSCH 1127320550 LESTER 12376 12610 12611 12612 TRANSPO IBR550 242-B90/BHP14501B FEATURES Diodes: 12-35A Avalanche For 28V Alternators  Φ145mm	242-AM0/BHP14502 FEATURES Diodes: 14-50 Ampere Diameter OD: 145mm With M8×52mm Battery Post With M8×52mm Ground Post With M5×34.5mm Trio Post With M5×25mm "W" Post REFERENCES.. BOSCH 1127320547 1127320571 CARGO 136581 TRANSPO IBR547 242-BA0/BHP14502B FEATURES Diodes: 14-35A Avalanche With M5×29.8mm "W" Post  Φ145mm	242-AY0/BHP14507 FEATURES Diodes: 14-50 Ampere Diameter OD: 145mm With M8×52mm Battery Post With M8×52mm Ground Post With M5×34.5mm Trio Post With M6 "W" Post REFERENCES.. BOSCH 1127320973  Φ145mm



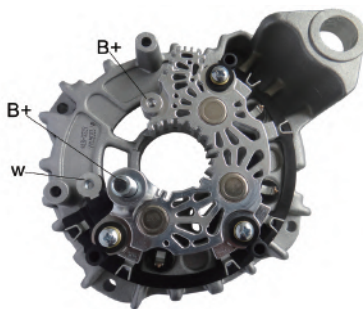

242-B20/BHP9001 FEATURES Diodes : 6-35 Ampere Diameter OD : 90mm With Trio For use on : Agrifol, Fiat, Lancia, Marshall Tractor, Same, Styer REFERENCES.. BOSCH 1127320152 1127320192 CARGO 130597 MOBILETRON RB-10H 	242-B30/BHP9002 FEATURES Diodes : 6-35 Ampere Diameter OD : 90mm With M6×52mm Batter Post With M5×28mm Trio Post With M5×48mm W-Post With Trio REFERENCES.. 	242-B40/BHP9003 FEATURES Diodes : 6-35 Ampere Diameter OD : 90 mm With M6×52mm Battery Post With Trio For use on : John Deere, IH REFERENCES.. BOSCH 1127320115 1127320116 1127320141 1127320142 CARGO 132670 MOBILETRON RB-13J TRANSPO IBR307 
242-B50/BHP9005 FEATURES Diodes : 6-35Ampere Diameter OD : 90mm With M6×52mm Battery Post With M5×28mm Trio Post With Trio REFERENCES.. 	242-B60/BHP9006 FEATURES Diodes: 6-35A Ampere Diameter OD: 90mm With M6×37mm Battery Post With Trio REFERENCES.. BOSCH 9121080595 TRANSPO IBR595 	242-D30 FEATURES Diodes: 6-50A Avalanche Diameter OD: 114mm With M8×57mm Battery Post REFERENCES.. BOSCH F005A00033 0986AN052 
242-D70 FEATURES Diodes: 8-50 A Avalanche Diameter OD: 114mm With M6×52.5mm Battery Post REFERENCES.. BOSCH F005A10185 	242-D80 FEATURES Diodes : 8-50A Avalanche Diameter OD: 114mm With M5×43.7 With M8+M6×48 With Trio REFERENCES.. LESTER 11.203.41 11.201.723 PRESTOLITE 201501137 	242-DE0 FEATURES Diodes : 6-35 A Ampere Diameter OD : 114mm With (M8+M6)×48mm Battery Post With Trio With Capacitor REFERENCES.. BOSCH 0120045200 





242-DW0 FEATURES Diodes:6-35A Avalanche Diameter OD:114mm With M6×52.5mm Battery Post With M5×43.7mm Trio Post With Trio REFERENCES.. CARGO 112098 111154 LESTER 23672 21114 FIT UNIT 0120488134 0120488227  Φ114mm	242-DX0 FEATURES Diodes:6-35A Avalanche Diameter OD:114mm With M8×52.5mm Battery Post With M5×43.7mm Trio Post With Trio REFERENCES.. CARGO 111094 111539 112149 LESTER 14970 MOBILETRON RB-04H FIT UNIT 0120489369 0120489377  Φ114mm	242-E30 FEATURES Diodes: 8-50A Avalanche Diameter: 125mm With M8×52mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With M5 W-Post With Trio For 24V Alternator REFERENCES.. LESTER 20078 FIT UNIT 0120468132 1127319112  Φ125mm
242-E60 FEATURES Diodes:8-50A Avalanche Diameter OD:114mm With M8×55.5mm Battery Post REFERENCES.. LESTER 14887 WAI IKR101 FIT UNIT 11.204.635  Φ114mm	242-E90 FEATURES Diodes:8-35A Avalanche Diameter OD:114mm With M8×52mm Battery Post With M5×43.7mm Trio Post With Trio REFERENCES.. FIT UNIT 11.203.850  Φ114mm	242-EA0 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×50.4mm Battery Post With Trio REFERENCES.. WAI IBR288 FIT UNIT 1125715489  Φ114mm
242-EC0 FEATURES Diodes: 8-35 Avalanche Diameter OD: 125mm With M8×52mm Battery Post With M4×32.5mm Trio Post With M6×52mm Ground Post With Trio For 28V Alternators REFERENCES..  Φ125mm	243-A60/BHP120120B(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×34.5mm Battery Post(L) With M8×35mm Battery Post(R) For 28V Alternators REFERENCES.. BOSCH NO F00M133290 DAF NO 1450806 MAN NO 51-26109-0008 UTM NO EB3290A EB3290C ZAUFER 312N10215Z CARGO NO 333527 333611 335295  Φ129mm	243-AE0/BHP120133A(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M6×35mm Battery Post(L) With M8×22mm Battery Post(R) REFERENCES.. BOSCH 0124325064 MOBILETRON RB-161H  Φ120mm






243-AG0/BHP120135A(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×22mm Battery Post(R) REFERENCES.. BOSCH 0124325067  Ø120mm	243-AH0/BHP120136A(△) FEATURES Diodes: 6-60A Avalanche Diameter OD: 129mm With M8×34.5mm Battery Post (L) With M8×22mm Battery Post (R) With 129mm Negative heat sink REFERENCES.. BOSCH F00M133287 TRANSPO IBR287 LESTER 12714  Ø129mm	243-AI0/BHP120137A(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post (L) With M8×34.5mm Battery Post (R) REFERENCES..  Ø120mm
243-AN0/BHP120143A(△) FEATURES Diodes: 6-60 A Avalanche Diameter: 129mm With M8×22mm Battery Post (L) With M8×34.5mm Battery Post (R) REFERENCES.. BOSCH F00M133235  Ø129mm	243-AS0/BHP12015(Y) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×32mm Battery Post(L) With M8×22mm Battery Post(R) For use on : Opel Astra, Corsa, Zafira, Ford Modeo REFERENCES.. BOSCH F00M123202 0124415001 CARGO 230360 MOBILETRON RB-115H TRANSPO IBR202  B+ B+ W Ø120mm	243-C60(△) FEATURES Diodes: 6-60A Avalanche Diameter OD: 129mm With M8×34.5mm Battery Post(R) With M8×34.5mm Battery Post(L) REFERENCES.. OEM NO F00M147643 LESTER 20550 20849 20907 21000 TRANSPO IBR7643 FEATURES 0124655181  B+ B+ W Ø129mm
243-CD0 FEATURES Diodes: 8-50 A Avalanche With M8×21.5mm Battery Post With M5 W-Post With Trio For 28V Alternators REFERENCES.. BOSCH ISKRA 11204260  W (M5) D+ (M6) B+ (M8)	243-DQ0 FEATURES Diodes: 6-80A Avalanche With M8×40mm Battery Post With M5 /L=32 With Trio With Capacitor REFERENCES.. LETRIKA 11.204.394 11.204.236 11.203.772 FIT UNIT AAN5829  D+ (M5) B+ (M8)	243-DT1(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 129mm With M8×32mm Battery Post For 28V Alternators REFERENCES.. OEM NO F00M133300 LESTER 12725 WAI IBR239 FIT UNIT Bosch 0 124 655 033, John Deere FF101774  B+ B+ W Ø129mm






243-DU0(△) FEATURES Diodes:6-50A Avalanche Diameter:129mm With M8×22mm Battery Post (R) With M8×47mm Battery Post (L) For 24V Alternators REFERENCES.. FIT UNIT 012465507617 	243-E52(△) FEATURES Diodes:6-50A Avalanche Diameter OD:120mm With M8×22mm Battery Post(L) With M8×34.5mm Battery Post(R) REFERENCES.. CARGO 114701 LESTER 23172 FIT UNIT 0124510001 	243-EB0(Y) FEATURES Diodes:8-50A Avalanche With M8×22mm Battery Post REFERENCES.. LESTER 24121 FIT UNIT 0-124-225-055 
243-FA0(Y) FEATURES Diodes:6-50A Avalanche Diameter OD:120mm With M8×22mm Battery Post(L) With M8×41.9mm Battery Post(R) REFERENCES.. CARGO 112190 LESTER 22874 FIT UNIT 0124325058 	243-G80 (△) FEATURES Diodes:6-60A Avalanche Diameter OD:129mm With M8×41.9mm Battery Post(L) With M8×41.9mm Battery Post(R) For 28V Alternators REFERENCES.. FIT UNITS 0124655673 	243-GH0 (△) FEATURES Diodes:6-60A Avalanche Diameter OD:129mm With M8×26mm Battery Post(R) With M8×26mm Battery Post(L) REFERENCES.. CARGO 113755 LESTER 23228 MOBILETRON RB-172H FIT UNIT 0124525034 ALT10074 
243-GK0 FEATURES Diodes: 6-50A Avalanche With M8×47mm Battery Post(L) With M8×22mm Battery Post(R) REFERENCES.. CARGO 112418 LESTER 22815 FIT UNIT 0124325008 	243-GL0 FEATURES Diodes: 8-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(L) With M8×47mm Battery Post(R) REFERENCES.. CARGO 113832 LESTER 21346 FIT UNIT 0124325010 	243-GX0 (△) FEATURES Diodes:6-60A Avalanche With M8×22mm Battery Post(R) With M8×34.5mm Battery Post(L) For 24V Alternators REFERENCES.. FIT UNIT 0124655632 



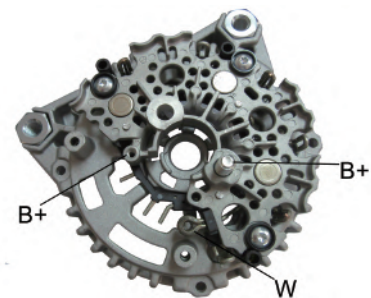




243-GY0 (△) FEATURES Diodes:6-60A Avalanche With M8×34.5mm Battery Post(R) With M8×22mm Battery Post(L) For 28V Altemators REFERENCES.. LESTER 20908 FIT UNIT F00M147642 0 124 655 615 	243-H10 (△) FEATURES Diodes:6-60A Avalanche With M8×34.5mm Battery Post(R) With M8×34.5mm Battery Post(L) For 24V Altemators 243-H20 (△) FEATURES With M8×35mm Battery Post(R) With M8×32mm Battery Post(L) For 28V Altemators REFERENCES.. LESTER 20550 20849 20907 21000 WAI IBR7643 FIT UNIT 0124655181/0124655182/ F00M147643 	243-H21 (△) FEATURES Diodes:6-60A Avalanche With M8×38mm Battery Post(R) With M8×38mm Battery Post(L) For 24V Altemators Height of P terminal is 20mm REFERENCES.. FIT UNIT 0124655637 
243-H30(△) FEATURES Diodes: 6-50A Avalanche Diameter OD: 120mm With M8×22mm Battery Post(R) With M8×35mm Battery Post(L) REFERENCES.. CARGO 139915 LESTER 21384 21404 21948 21951 WAI IBR1200 MOBILETRON RB-118H FIT UNIT FOOM 113200 	243-HF0 (Y) FEATURES Diodes:6-35A Avalanche With M6×28.5mm Battery Post(R) With M6×41.7mm Battery Post(L) With Trio REFERENCES.. FIT UNIT 0124220012 	243-HG0 (△) FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post(R) With M8×35mm Battery Post(L) For 28V Altemators REFERENCES.. FIT UNIT 0124655637 
243-HX2(△) FEATURES Diodes: 3-35A Avalanche With M8×40.5mm Battery Post For 28V Altemators REFERENCES.. 	243-J60 FEATURES Diodes :6-50A Avalanche With M8×40mm Battery Post With M5 W-Post With Trio With Capacitor For 28V Altemators REFERENCES.. FIT UNIT 11.204.409 	244-AC2 (Y) FEATURES Diodes:6-50A Avalanche With M8×30mm Battery Post Bracket ID: 128mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 20499 FIT UNIT F000BL0639 








244-AC6 (Y) FEATURES Diodes:6-50A Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 20544 FIT UNIT F000BL0707 F000BL07K9 	244-ACC(Y) FEATURES Diodes:6-60A Avalanche With M8×26mm Battery Post Bracket ID: 136mm Bearing ID: 38mm Mounting:W/O REFERENCES.. FIT UNIT F000BL0708 	244-AD1 FEATURES Diodes:6-50A Avalanche With M8×24.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 5266781 
244-AH0 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Bracket ID: 143mm Bearing ID: 38mm Mounting: W/O REFERENCES.. 	244-AX0(Y) FEATURES Diodes:3-50A Avalanche With M8×30mm Battery Post REFERENCES.. 	244-B7F(△) FEATURES Diodes:6-60A Avalanche With M8×30mm Battery Post Bracket ID: 138mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 24226 FIT UNIT F000BL08P2 
244-B70 FEATURES Diodes:6-60A Avalanche Without Trio Customer provide negative heat sink REFERENCES.. BOSCH 0986082310 F000BL0704 F000BL07N9 LUCAS LRA03542 	244-B75 (△) FEATURES Diodes:6-60A Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT F00BL0803 	244-BD0 FEATURES Diodes:6-50A Avalanche With M8×15mm Battery Post REFERENCES.. 







244-BD1 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES..  B+ W	244-BD2 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1288 LESTER 11305 FIT UNIT 0121813001  B+ W	244-BD4 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1284 CARGO 11301 LESTER IBR4011 TRANSPO 0121715012 FIT UNIT 0121615010  B+ W
244-BD5 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1285 CARGO 115804 LESTER 11302 FIT UNIT 0121715016  B+ W	244-BD6 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1384 LESTER 11445 FIT UNIT 0121813020 ALT10782  B+ W	244-BD7 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1293 LESTER 11310 FIT UNIT 0121813006  B+ W
244-BD8 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1287 LESTER 11304 FIT UNIT 0121813002  B+ W	244-BDG FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 0121813006  B+ W	244-BDK FEATURES Diodes:12-35A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11301 FIT UNIT 0 121 615 110 0 121 715 112  B+ W







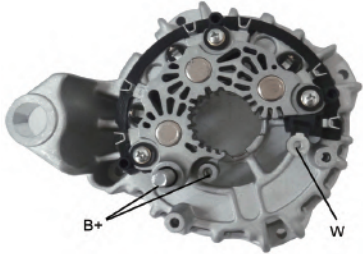
244-BN0 FEATURES Diodes:6-50A Avalanche With M8×32mm Battery Post Bracket ID: 138mm Bearing ID: 38mm Mounting: W/O REFERENCES.. TRANSPO IBR4001 FIT UNIT F00M 314001 0121615003 	244-BX1 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 20008 FIT UNIT 0121715124 	244-C71 FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Bracket ID: 138.3mm Bearing ID: 38mm Mounting: 2-M10*1.5 REFERENCES.. 
244-C91 FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Bracket ID: 138.3mm Bearing ID: 38mm Mounting: 2-M10*1.5 REFERENCES.. 	244-CE0 FEATURES Diodes:6-60A Avalanche With M8-6h M4×24.5mm Customer provide negative heat sink REFERENCES.. BOSCH F00M314007 F00M314010 F00M314035 LESTER 23979 TRANSPO IBR4001 	244-CE1 FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Bracket ID: 138.3mm Bearing ID: 38mm Mounting: 2-M8 REFERENCES.. FIT UNIT 0121615108 
244-CK0 FEATURES Diodes: 12-50A Avalanche With M8-6h M4×24.5mm Customer provide negative heat sink REFERENCES.. BOSCH F00M133460 LESTER 11445 FIT UNIT 0121813020 	244-CK1 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Bracket ID: 152mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 11445 FIT UNIT F00M133460 0121813020 	244CK4 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1288 LESTER 11305 FIT UNIT 0-121-813-001 







244-CK5 FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. 	244-CK8 FEATURES Diodes:12-50A Avalanche With M8×36mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1332 CARGO CAL10452 LESTER 11362 FIT UNIT BOS0121715118 	244-CKA FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Bracket ID: 142.8mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 20758 FIT UNIT 0121813005 012181310 
244-CKC FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Bracket ID: 152mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 20758 FIT UNIT 0121813005,012181310 	244-CKF FEATURES Diodes:12-50A Avalanche With M8×15mm Battery Post Bracket ID: 152mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 11310 FIT UNIT 0121813006 	244-CM0 FEATURES Diodes: 6-60A Avalanche With M8×23.5mm Battery Post REFERENCES.. BOSCH F00M573907 
244-CN0 FEATURES Diodes: 6-80A Avalanche With M8×32mm M4×24.5mm Customer provide negative heat sink REFERENCES.. LESTER 11346 FIT UNIT 0121715009 	244-CN3 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Bracket ID: 142.8mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 11307 FIT UNIT 0121715011 	244-CP0 FEATURES Diodes: 6-80A Avalanche With M8×32mm With M4×24.5mm Customer provide negative heat sink REFERENCES.. BOSCH F00M349926 FIT UNIT 012175002 






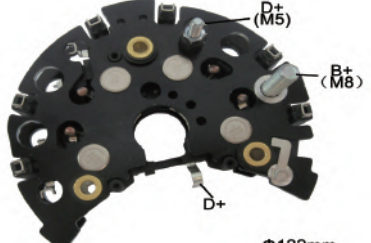
244-CP1 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11346 FIT UNIT 0125811051 	244-CQ0 FEATURES Diodes: 6-80A Avalanche With M8×32mm With M4×24.5mm Customer provide negative heat sink REFERENCES.. BOSCH F00M324006 FIT UNIT 012175006 	244-CQ1 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Bracket ID: 142.8mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 11220 11307 WAI IBR4006 FIT UNIT F00M324006 012175006 
244-CR0 FEATURES Diodes: 6-80A Avalanche With M8×32mm With M4×24.5mm Customer provide negative heat sink REFERENCES.. BOSCH F00M324006 FIT UNIT 012175006 	244-CR1 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Bracket ID: 142.8mm Bearing ID: 38mm Mounting: 2-M10×1.25 REFERENCES.. LESTER 20008 FIT UNIT 0121 715 024 	244-CX1 FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Bracket ID: 138.3mm Bearing ID: 38mm Mounting: 18.5°9 REFERENCES.. LESTER 23976 CARGO CA1968IR FIT UNIT 0 121 615 105 
244-CXC FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Bracket ID: 138.5mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 11300 11301 FIT UNIT 0121 615 010 	244-CZ0 FEATURES Diodes:12-50 A Avalanche With M8×26mm Customer provide negative heat sink REFERENCES.. BOSCH F00M349925 	244-CZ1 FEATURES Diodes:12-50A Avalanche With M8×26mm Battery Post Bracket ID: 142.8mm Bearing ID: 38mm Mounting: 2-M10*1.5 REFERENCES.. LESTER 24077 TRANPO IBR4003 FIT UNIT F00M349925 


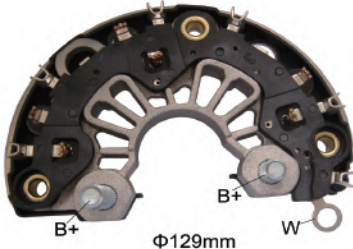



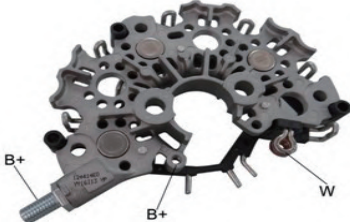


244-D10 FEATURES Diodes:6-80 A Avalanche With M8×32mm Customer provide negative heat sink REFERENCES.. BOSCH F00M324005 FIT UNIT 0121715003 TRANSPO IBR4033 LESTER 11221 	244-D13 FEATURES Diodes:6-60 Avalanche With M8×32mm Battery Post Bracket ID: 138.3mm Bearing ID: 38mm Mounting: W/O REFERENCES.. MOBILETRON IBR40221 FIT UNIT F00M314015 F00M314022 F00M314042 F00M349920 F00M349923 	244-DB0 FEATURES Diodes: 6-50A Avalanche With M8×32mm Battery Post Customer provide negative heat sink For 28V Alternators REFERENCES.. 
244-DC0 FEATURES Diodes:6-50A Avalanche With M8×32mm Battery Post REFERENCES.. 	244-DC1 FEATURES Diodes:12-50A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT A18-428Y 	244-DCD FEATURES Diodes: 6-50A Avalanche With M8×32mm Battery Post REFERENCES.. OEM NO F00M349916 FIT UNIT 0121615011 CROSS NO CARGO 115966 LESTER 11345 Vehicle Model LAND ROVER VOLVO 
244-DD0 FEATURES Diodes:6-50A Avalanche With M8×32mm Battery Post Customer provide negative heat sink For 28V Alternators REFERENCES.. 	244-DF0 FEATURES Diodes:6-60A Avalanche With M8×32.8mm Battery Post REFERENCES.. OEM NO A000906551 FIT UNIT 0125711075 	244-DG2 (△) FEATURES Diodes:6-60A Avalanche With M8×34mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 23100-4BBOD 






244-DG3 (△) FEATURES Diodes:6-60A Avalanche With M8×34mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1396 LESTER 11470 FIT UNIT 0121615016 	244-DH0 FEATURES Diodes:6-80A Avalanche With M8×23.5mm Battery Post REFERENCES.. FIT UNIT 0125811001 	244-DH1 FEATURES Diodes:6-80A Avalanche With M8×40.5mm Battery Post REFERENCES.. LESTER 11914 FIT UNIT 0125811015 Bosch 0 125 811 015, Ford 1820604, BK3T-10300-EA, BK3Z-10346-A 
244-DK1 FEATURES Diodes:3-60A Avalanche With M8×32mm Battery Post Customer Provide negative heat sink REFERENCES.. LESTER 11336 FIT UNIT FG15T042 	244-DK2 FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1315 CARGO 115966 LESTER 11345 FIT UNIT 0121615011 0121615111 	244-DK3 FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113958, CA1928IR FIT UNIT 121615002 
244-DK4 FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114756 LESTER 11346 TRANPO IBR40011 FIT UNIT 0 121 615 027 0 121 615 127 	244-DL0 FEATURES Diodes:3-80A Avalanche With M8×32mm Battery Postt REFERENCES.. 244-DK0 FEATURES Diodes:3-60A Avalanche With M8×32mm Battery Postt 	244-DL1 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post REFERENCES.. OEM NO AL-1316 CARGO 114756 LESTER 11346 FIT UNIT 31110085 36000209 








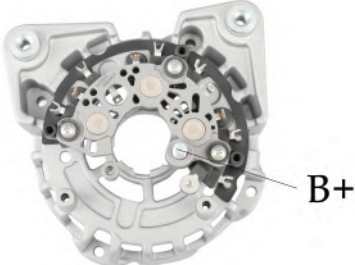
244-DL2 FEATURES Diodes:6-80A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114666 LESTER 20036 FIT UNIT 0121715029 	244-DLK FEATURES 6-80A Avalanche With M8×32mm Battery Post REFERENCES.. OEM NO 0121715004 CARGO 20009 23322 LESTER 20009 23322 TRANSPO 23322N Vehicle Model VOLKSWAGEN 	244-DN1 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1217 CARGO 115532 LESTER 11220 FIT UNIT 0121715014 A2721540802 
244-DN6 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115671 LESTER 20008 FIT UNIT 0121715024 ALT10718, BOS0121715124 	244-DS0 FEATURES Diodes:10-60A Avalanche Diameter OD:128mm With M8×32mm Battery Post REFERENCES.. FIT UNIT 0125813002 	244-DZ0 FEATURES Diodes:6-50A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. 
244-E80 FEATURES Diodes:3-60A Avalanche With M8×26mm Battery Postt REFERENCES.. 	244-E81 (△) FEATURES Diodes:6-60A Avalanche With M8×26mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115455 LESTER 20545 FIT UNIT F000BL0705 F000BL07P9 	244-E85 (△) FEATURES Diodes:6-60A Avalanche With M8×26mm Battery Post Without Trio Customer provide negative heat sink REFERENCES.. CARGO CAL10547GS FIT UNIT 505594150210 

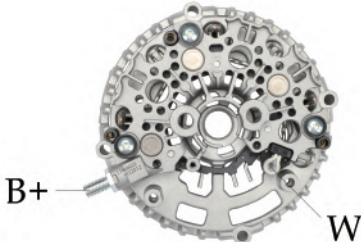






244-E86 FEATURES Diodes:6-50A Avalanche With M8×34mm Battery Post Bracket ID: 136mm Bearing ID: 38mm Mounting: 10.2mm REFERENCES.. FIT UNIT F000BL07T1 	244-EE0(△) FEATURES Diodes:6-35A Avalanche With M8×26mm Battery Post Customer provide negative heat sink For 28V Alternators REFERENCES.. FIT UNIT F000BL1284 F000BL0723 	244-EE1 FEATURES Diodes:3-35A Avalanche With M8×26mm Battery Post REFERENCES.. 
244-EU0 FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink For 28V Alternators REFERENCES.. 	244-F80(Y) FEATURES Diodes:3-60A Avalanche With M8×15mm Battery Post REFERENCES.. 	244-FC0(Y) FEATURES Diodes:3-50A Avalanche With M6×15mm Battery Post REFERENCES.. FIT UNIT 0272220890 
244-FC1(Y) FEATURES Diodes:6-50A Avalanche With (M8+M6)×15mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 0272220890 	244-FK0 FEATURES Diodes:3-35A Avalanche With M8×29.5mm Battery Post REFERENCES.. FIT UNIT F000BL0118 	244-FT0 FEATURES Diodes:10-50A Avalanche Diameter OD:128mm With M8×23.5mm Battery Post REFERENCES.. LESTER 11722 FIT UNIT 0125811092 








244-FU0 FEATURES Diodes:10-50A Avalanche Diameter OD:128mm With M8×29.5mm Battery Post REFERENCES.. FIT UNIT 0125812044 	244-GM2 FEATURES Diodes:3-50A Avalanche With M8×37mm Battery Post REFERENCES.. FIT UNIT F000BL07G5 	244-GZ1(△) FEATURES Diodes:3-60A Avalanche With M8×15mm Battery Post REFERENCES.. 
240-9A0 FEATURES Diodes: 8-35A Avalanche Diameter OD: 102mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH 1127319005 FIT UNIT 0123110005 	240-9F0 FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. BOSCH NO 1127319558 1127319562 AUDI NO 028-903-359F EGI NO 77BO-341 77BO-588 ERA NO 216162 CQ NO CQ1080457 CQ1080469 HUCO NO 139461 	240-9U0(Y) FEATURES Diodes:8-35A Avalanche Diameter OD:112mm With M8×40.5mm Battery Post With Trio/Capacitor REFERENCES.. LESTER 21246 FIT UNIT 0123310052/051 1127319814 
240-9V0 FEATURES Diodes:6-35A Avalanche Diameter OD:112mm With M8×40.5mm Battery Post With Capacitor REFERENCES.. CARGO 113832 LESTER 21345 FIT UNIT ALT31013 0123315008 0123315017 	240-9W0(Y) FEATURES Diodes:8-50A Avalanche Diameter OD:122mm With M8×30mm Battery Post With Trio REFERENCES.. CARGO 111735 112557 LESTER 13357 13417 13422 13520 WAI IBR649 13541N FIT UNIT 0120465006 ALT2064 	240-9X0(Y) FEATURES Diodes: 8-50A Avalanche Diameter OD: 122mm With M8×30mm Battery Post With Trio REFERENCES.. OEM NO AL-1037 CARGO 112530 LESTER 13803 FIT UNIT 0.123.510.012 







240-920 FEATURES Diodes:8-35A Avalanche With M8×49mm Battery Post With M4×29mm Trio Post With M5×32mm W Post With Trio/Capacitor For 28V Altemators REFERENCES.. CARGO 113738 LESTER 12817 FIT UNIT 11.203.396 	243-17A (△) FEATURES Diodes:6-80A Avalanche Diameter OD:129mm With M8×22mm Battery Post(L) With M8×32mm Battery Post(R) REFERENCES.. FIT UNIT 012425029 	244-11A FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. 
244-14A FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CA1968IR LESTER 23967 FIT UNIT 0121615005 	244-14B FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115544 LESTER 23973 TRANSPO IBR4022 FIT UNIT 0121615021 	244-14C FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1317 LESTER 11347 11568 FIT UNIT 0121615014 
244-14D/BHP12804 FEATURES Diodes:3-60A Avalanche With M8×15mm Battery Post REFERENCES.. 	244-14E FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO 0121615005 CARGO CA1968IR LESTER 23976 TRANSPO IBR4002 FIT UNIT LRA02976 	244-14F FEATURES Diodes:6-80A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114666 LESTER 20036 FIT UNIT 0121715029 



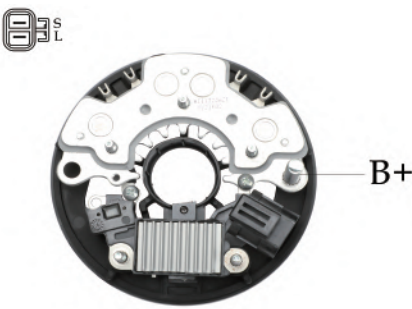
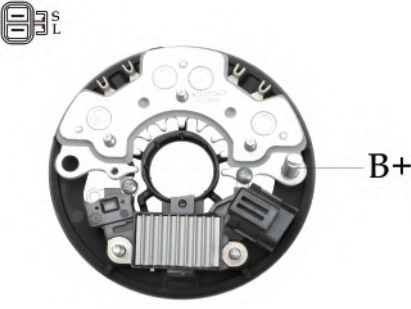
244-14G FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 116012 LESTER 11300 TRANSPO IBR4043 FIT UNIT 0121615010 	244-14H FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115417 LESTER 24003 FIT UNIT 0121615006 	244-14J FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1283 CARGO 116012 LESTER 11300 FIT UNIT 12-31-7-550-967 12-31-7-551-254 
244-14K FEATURES Diodes:6-80A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. 	244-14L FEATURES Diodes:6-80A Avalanche With M8×15.5mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO 12317550968/12317551256/12317555926 CARGO 114524,CA1953IR LESTER 23228 FIT UNIT F00BL0802S 	244-14N FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Bracket ID: 138.3mm Bearing ID: 38mm Mounting: W/O REFERENCES.. LESTER 20010 FIT UNIT 0121615007 
244-14X FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 23976 WAI IBR4002 FIT UNIT 0121615005 	244-14Z FEATURES Diodes:6-60 Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1317 LESTER 11347 FIT UNIT F00M31400 0121615014 	244-17A FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1322 LESTER 11222 FIT UNIT 0121715022 






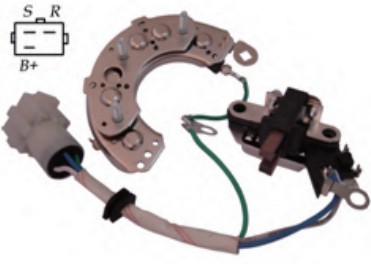
244-17B FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115544 LESTER 23973 TRANSPO IBR4022 FIT UNIT 0121615021 0121615121 	244-17C FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1396 LESTER 11470 FIT UNIT 0121615016 	244-17K FEATURES Diodes:6-80 Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1316 CARGO 114756 LESTER 11346 FIT UNIT 0121715009 
244-17U FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Bracket ID: 138.3mm Bearing ID: 38mm Mounting: 2-M8 REFERENCES.. LESTER 11470 FIT UNIT 0121615016 	244-45C(Y) FEATURES Diodes:6-50A Avalanche With M8×30mm Battery Post Bracket ID: 128mm Bearing ID: 38mm Mounting: 2-M8 REFERENCES.. MOBILETRON RB-185HV FIT UNIT F000BL0618 	244-45E FEATURES Diodes:6-50A Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT F000BL0425 
244-92B FEATURES Diodes:6-50A Avalanche With M8×15mm Battery Post Bracket ID: 128mm Bearing ID: 38mm Mounting: 2-M8 REFERENCES.. FIT UNIT F000BL0657, F000BL06J5 23100-3TS3A 	244-92G FEATURES Diodes:6-50A Avalanche With M8×15mm Battery Post Bracket ID: 128mm Bearing ID: 38mm Mounting: 10.5 REFERENCES.. FIT UNIT F000BL06AA 	244-95E FEATURES Diodes: 6-50A Avalanche With M8×30mm Battery Post REFERENCES.. LESTER NO 20641 FIT UNIT F000BL04C3, F000BL04C4 Vehicle Model DACIA, RENAULT 


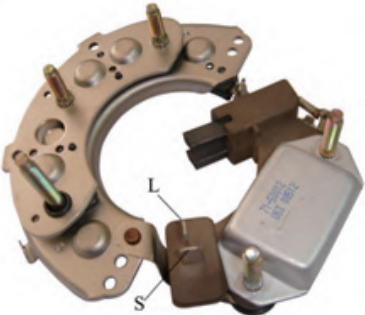
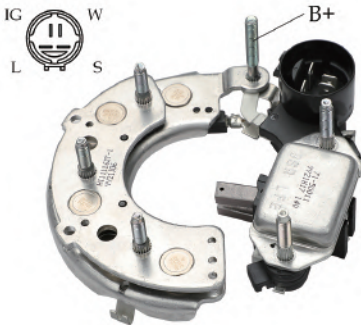
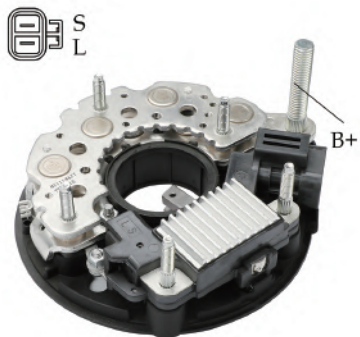
244-H02 FEATURES Diodes:6-60A Avalanche With M8×15mm Battery Post REFERENCES.. OEM NO F 00M 314 023, F 00M 314 043 LESTER 11300 FIT UNIT 0121715112 Vehicle Model FORD Galaxy 2.0 [AOWA] 05.2006; FORD Galaxy 2.0 [AOWB] 05.2006 	245-011 FEATURES Diodes: 5-50A Avalanche With M8×32.5mm Battery Post REFERENCES.. FIT UNIT 0126312016/2107001 Vehicle Model TOYOTA (1989-2007) 	244-B7U FEATURES Diodes:6-60A Avalanche With M8×34mm Battery Post REFERENCES.. BOSCH NO F000BL9043 UTM NO EB3805A ZAUFER 312N10448Z LESTER 20304, 20352, 20770, 20799 CARGO 335316 VOLTAG AEB3805 BOSCH UNIT F000BL08A0 
244-B7V FEATURES Diodes:6-60A Avalanche With M8×30mm Battery Post REFERENCES.. BOSCH NO F000BL9030 LESTER 20546, 20895 PSH NO 053.000.447.010, 053.000.447.016 AS NO ARC0206S BOSCH UNIT F 000 BL0 704, F 000 BL0 777 	240-A60 FEATURES Diodes:8-35A Avalanche, OD: 112mm With M8*35.5 Battery Post REFERENCES.. LESTER 12780 	242-E61 FEATURES Diode: 8-50A avalanche tube (avalanche voltage 24 ~ 32V) OD: 114mm B+ screw (M8x55.5) With W inserts With B+ shrapnel and W shrapnel Without Trio REFERENCES.. OEM IA1472/IA1473 WAI IKR100 LESTER 14034 
242-E91 FEATURES Diode: 8-50A avalanche tube (avalanche voltage 24 ~ 32V) OD:114mm B+ screw (M8*52) W screw (M5*43.7) With W inserts Without Trio REFERENCES.. ISKRA IA1716 DEUTZ 01184024 MAHLE MG927 	244-FC1(Y) FEATURES Diodes:6-50A Avalanche With M8×15mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 0272220890 	



150-010/HI10303ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI10303+REG(05-088H) 14V REFERENCES.. HITACHI LR180-734B CARGO 113421 LESTER 13534 TRANPO IHR753+IH762 	150-020/HI10304ZT FEATURES Diodes: 6-35 Ampere Complete set with REC 1250AU10+REG (05-088H) 14V REFERENCES.. HITACHI LR160-724 LR180-736 LESTER 13474 13531 TRANPO IHR758+IH762 	150-060/HI10310ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI10310+REG (05-052) 14V REFERENCES.. HITACHI LR170-738 LR170-744 LESTER 13334 TRANPO IHR754+IH761 
150-140/HI11301AZT-2 FEATURES Diodes: 8-50A Avalanche Complete set with REC HI11301HD+REG (05-0851) 14V REFERENCES.. MOBILETRON RV-H02 FIT UNIT LR1100-502E LR1100-502G TRANPO IHR769+IH769 	150-150/HI11302A-1ZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11302A-1+REG(05-042H) 14V L,S Terminal REFERENCES.. HITACHI IVR-HIT01 	150-220/HI11302BZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11302B+REG (05-037H) 28V L Terminal REFERENCES.. HITACHI LR250-517 CARGO 113190 150-221 FEATURES REC(HI11302B)+REG (13509700) 28V REFERENCES.. HITACHI LR250-517 
150-240/HI11303AZT FEATURES Diodes: 8-50A Avalanche Complete set with REC HI11303A+REG (05-0082) 14V REFERENCES.. HITACHI LR1110-705 TRANPO IHR773+IH766 	150-260/HI11303AZT-2 FEATURES Diodes: 8-50A Avalanche Complete set with REC HI11303A+REG (05-0251) 14V REFERENCES.. TRANPO IHR773+IH765 	150-280/HI11304AZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11304A+REG (05-054H) 14V REFERENCES.. HITACHI LR1110-734 LESTER 13939 TRANPO IHR770+IH744 




150-300/HI11305AZT-1 FEATURES Diodes: 6-35A Avalanche Complete set with REC HI11305A+REG(05-036H) 14V REFERENCES.. LESTER 13901 FIT UNIT LR1100-703 LR1100-705 TRANSPO IHR771+IH774 	150-320/HI11306ZT FEATURES Diodes: 6-35 Ampere Complete set with REC HI11306+REG (05-0251) 14V REFERENCES.. FIT UNIT LR190-734 150-340/HI11307ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11307+REG (05-0251) 14V 	150-370/HI11308BZT FEATURES Diodes: 8-35A Avalanche With M6×51mm Battery Post REC HI11308B+REG (05-016H) 24V REFERENCES.. MOBILETRON RV-H017B 150-360/HI11308B-1ZT FEATURES With (M8×M4)×55.4mm Battery Post REC HI11308B-1+REG (05-016H) 24V 
150-380/HI11308BZT-1 FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11308B+REG(05-037H)24V REFERENCES.. 	150-390/HI11311BZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11311B+REG (05-1031) 24V REFERENCES.. 	150-420/HI11312ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11312+REG (05-043H) 14V REFERENCES.. LESTER 13940 FIT UNIT LR180-510 150-410/HI11312-2ZT FEATURES With M6×48mm Battery Post REC HI11312-2+REG(05-043H)14V 
150-450/HI11313AZT FEATURES Diodes: 8-50A Avalanche Complete set with REC HI11303A+REG (05-0541)14V For use on: Nissan Maxima 3.0L DOHC, Infiniti 130 REFERENCES.. TRANSPO IHR773+IH744 	150-470/HI11314AZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11304A+REG (05-036H)14V REFERENCES.. LESTER 13826 TRANSPO IHR770+IH774 	150-480/HI11315A-1ZT FEATURES Diodes: 8-50A Avalanche Complete set with REC HI11315A-1+REG(05-0141)14V REFERENCES.. HITACHI LR1100-502 

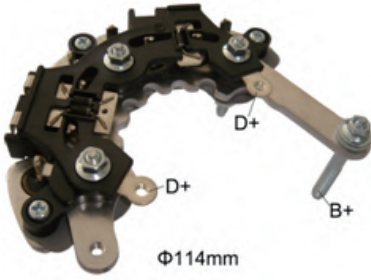

150-500/HI11315AZT FEATURES Diodes: 6-50A Avalanche Complete set with REC HI11315A+REG (05-0531)14V REFERENCES.. HITACHI LR1100-502MD TRANSPO IHR669+IH669 	150-510/HI11317AZT FEATURES Diodes: 8-50A Avalanche Complete set with REC HI11317A+REG (05-0531)14V REFERENCES.. HITACHI LR180-508 TRANSPO HI11301A+05-053 FIT UNIT JA1899IR 150-490/HI11315A-1ZT1 FEATURES REC HI11315A-1+REG(05-0531)14V REFERENCES.. FIT UNIT LR1100-508 	150-570/HI11318AZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11318A+REG (05-042H)14V REFERENCES.. HITACHI LR1100-501 150-530/HI11318A-1ZT FEATURES With M8×50.5mm Battery Post REC HI11318A-1+REG(05-042H)14V 
150-590/HI11318BZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11318B+REG (05-016H) 24V REFERENCES.. HITACHI LR280-501 	150-620/HI11321AZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11321A+REG(05-054H)14V REFERENCES.. HITACHI LR1100-705 TRANSPO HI11321A+IH744 	150-640/HI11322AZT FEATURES Diodes: 12-35A Avalanche Complete set with REC HI11322A+REG(05-091)14V REFERENCES.. HITACHI LR1130-701 TRANSPO IHR765+IH746 LESTER 11120 
150-670/HI11323AZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11323A+REG(05-054H)14V REFERENCES.. HITACHI LR1100-712 LESTER 13900 	150-671 FEATURES Diodes:8-50A Avalanche Complete set with REC 12503710+REG(05-054H)14V REFERENCES.. LESTER LR1125-705B 	150-690/HI11324AZT FEATURES Diodes: 6-35A Avalanche Complete set with REC HI11324A + REG(05-096)14V REFERENCES.. LESTER 11119 

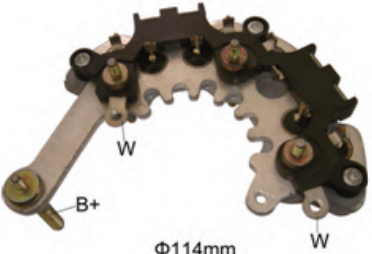



150-750/HI11332ZT FEATURES Diodes: 8-50 Ampere Complete set with REC HI11332+REG(05-0251) 14V REFERENCES.. LESTER 13940 	150-851/HI11401ZT FEATURES Diodes: 6-35 Ampere Complete set with REC HI11401+REG (05-0041) 14V REFERENCES.. HITACHI LR170-505 LR170-505B TRANPO IHR749+IH776 150-850/HI11401AZT FEATURES Diodes: 6-35A Avalanche REC HI11401A+REG (05-0041) 14V 	150-910/HI11402ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11402+REG (05-0031) 24V REFERENCES.. HITACHI LR235-503C LR235-503B MOBILETRON VR-H2000-86B+RH-74 150-900/HI11402-3ZT FEATURES Complete set with REC HI11402+REG (05-0241) 14V REFERENCES.. HITACHI LR235-G3320 CARGO 138615 
150-931/HI11403ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11403+REG (05-0151) 14V REFERENCES.. NIKKO LR170-748 LR170-748B TRANPO IHR746+IH767 150-930/HI11403AZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11403+REG (05-0151) 14V REFERENCES.. LESTER 13638 	150-940/HI11403AZT-1 FEATURES Diodes: 8-35A Avalanche With M8×45.6mm Battery Post Complete set with REC HI11403A+REG(05-001H) 14V REFERENCES.. HITACHI LR190-750 LESTER 11027 150-CB0 FEATURES With M6×20.3mm Battery Post REC HI11408A+REG(05-001H) 14V 	151-190/HI111ZT21135F FEATURES Diodes: 6-35 Ampere Complete set with REC HI11106+ REG (05-007H) 14V REFERENCES.. HITACHI LR170-417 LR170-408T 
151-301/HI111ZT31135F FEATURES Diodes: 6-35 Ampere Complete set with REC HI11106+ REG (05-010H) 14V REFERENCES.. HITACHI L140-53202 L150-83201 	151-520/HI111ZTN31135F FEATURES Diodes: 6-35 Ampere Complete set with REC HI11101+ REG (05-027H) 14V REFERENCES.. HITACHI L150-13204 	151-650/HI113ZT22835F FEATURES Diodes: 6-35A Ampere Complete set with REC HI11124F+ REG (12-0031) 28V REFERENCES.. 







151-660/HI113ZT32835F FEATURES Diodes: 6-35 Ampere Complete set with REC HI11124+REG (12-0091) 28V REFERENCES.. 	151-670/HI114ZT FEATURES Diodes: 6-35 Ampere Complete set with REC HI11123+ REG (05-046) 14V REFERENCES.. HITACHI LR160-151 CARGO 14460 151-680/HI114ZT-1 FEATURES REC HI11123+REG (05-005) 28V 	151-740/HI132ZT FEATURES Diodes: 8-25 Ampere Diameter OD: 132mm Complete set with REC HI13201+REG (12-001H) 28V REFERENCES.. HITACHI 1-81200-4710-0 0-3500-3872 
151-800/HI112ZT21135F FEATURES Diodes: 6-35A Ampere Diameter OD: 112mm Complete set with REC 12518700+ REG (05-030H) 14V REFERENCES.. 	151-930 FEATURES Diodes:6-35 Ampere Complete set with REC HI10002F+REG 13526010 28V REFERENCES.. FIT UNIT LR220-24 	151-940 FEATURES Diodes:6-35 Ampere Complete set with REC HI10002F+REG 13525810 14V REFERENCES.. LESTER 12109 12111 FIT UNIT LR135-105 LR135-126 
152-010/HI11116ZT FEATURES Diodes:6-35A Ampere Complete set with REC HI11116+ REG (05-010H) 14V REFERENCES.. HITACHI L140-53202 L150-83202 FIT UNIT JA761IR 152-030/HI11116ZT-2 FEATURES REC HI11116+ REG (05-012H) 28V 	152-020/HI11116ZT-1 FEATURES Diodes: 6-35 Ampere Complete set with REC HI11116+REG (05-011H) 14V With 4 pin plug REFERENCES.. FIT UNIT JA863IR 	152-100/HI11146ZT FEATURES Diodes:8-50A Avalanche Complete set with REC HI11146+REG (05-100) 14V REFERENCES.. HITACHI 37300-27010 37300-27011 37300-27012 TRANSPO VR-K003 VR-K05 FIT UNIT JA1708IR 





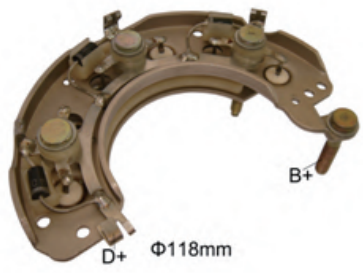
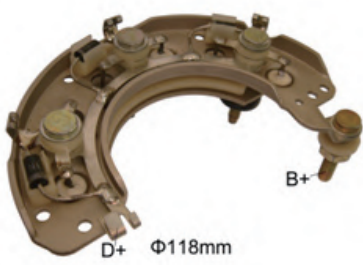
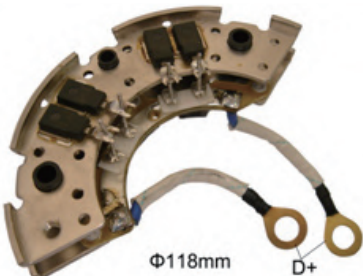
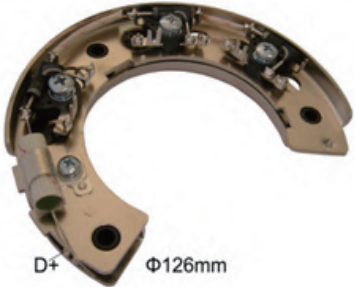
152-431/HI1112T41135F FEATURES Diodes:6-35 Ampere Complete set with REC HI11106+REG (05-011H) 14V REFERENCES.. HITACHI L140-53202 L150-83201 	152-570 FEATURES Diodes:6-35 Ampere Complete set with REC HI11117+REG (05-013)14V REFERENCES.. CARGO 112092 LESTER 22395 MOBILETRON RV-H055N FIT UNIT LR170-406 	152-580 FEATURES Diodes:6-35 Ampere Complete set with REC HI11116+REG (05-019) 14V REFERENCES.. CARGO 111186 LESTER 12273 FIT UNIT LR170-420 
152-600 FEATURES Diodes: 6-35 Ampere Complete set with REC 12524700+REG(05-007)14V REFERENCES.. CARGO 110701 LESTER 22297 FIT UNIT 23100-02N16 	250-C50 FEATURES Diodes:8-35A Avalanche Diameter OD:98mm With M6×34.5mm Battery Post With Trio REFERENCES.. 	250-B60/HI16001 FEATURES Diodes: 12-50 Ampere Diameter OD: 160mm With M8×50.5mm Battery Post Without Trio REFERENCES.. 
250-011/HI11301A FEATURES Diodes: 8-50A Avalanche Diameter OD: 127mm With M8×45.6mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI 0901-0021 CARGO 235729 TRANSPO IHR769 MOBILETRON RH-73 250-010/HI11301 FEATURES Diodes: 8-35 Ampere 	250-040/HI11302 FEATURES Diodes: 8-35 Ampere Diameter OD: 113mm With M8×45.6mm Battery Post With M5×31.6mm Mounting Bolt 250-041/HI11302A FEATURES Diodes:8-35A Avalanche 250-160/HI11302B FEATURES Diodes: 8-35A Avalanche With M6×51mm Battery Post 	250-170/HI11303A FEATURES Diodes: 8-50A Avalanche Diameter OD: 119mm With M6×20.3mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI L1125G-2320 L1110G-4320 CARGO 138718 TRANSPO IHR773 MOBILETRON RH-35 





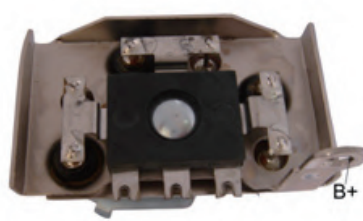
250-180/HI11305A FEATURES Diodes: 6-35A Avalanche Diameter OD: 119mm With M6×20.3mm Battery Post With M5×31.6mm Mounting Bolt Mates to Regulators with Integral Brush Holder REFERENCES.. HITACHI LR1110711 LR1110711B TRANSPO IHR771 MOBILETRON RH-71 	250-190/HI11306 FEATURES Diodes: 6-35 Ampere Diameter OD: 119mm With M8×50.5mm Battery Post With M5×36.5mm Mounting Bolt REFERENCES.. HITACHI LR190-734 250-200/HI11307 FEATURES Diodes: 8-35 Ampere 	250-210/HI11308B FEATURES Diodes: 8-35A Avalanche Diameter OD: 127mm With M6×51mm Battery Post REFERENCES.. HITACHI LR280-508 
250-270/HI11315A FEATURES Diodes: 6-50A Avalanche Diameter OD :127mm With M8×45.6mm Battery Post With M5×35mm Mounting Bolt REFERENCES.. HITACHI LR1100-502MD TRANSPO IHR669 MOBILETRON RH-85 250-280/HI11315A-1 FEATURES Diodes: 8-60A Avalanche 	250-290/HI11318A FEATURES Diodes: 8-35A Avalanche Diameter OD :127mm With M6×20.3mm Battery Post With M5×31.6mm Mounting Bolt 250-300/HI11318A-1 FEATURES With M8×50.5mm Battery Post 250-291/HI11318B FEATURES Diodes: 8-35A Avalanche 	250-360/HI11322A FEATURES Diodes : 12-35A Avalanche Diameter OD : 113mm With M6×20.3mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI LR1130-701 TRANSPO IHR765 MOBILETRON RH-102 
250-370/HI11323A FEATURES Diodes : 8-35A Avalanche Diameter OD : 119mm With M8×50.5mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. 	250-480/HI11304A FEATURES Diodes: 8-35A Avalanche Diameter OD: 119mm With M6×20.3mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI LR1110-709B LR1110-707G TRANSPO IHR770 MOBILETRON RH-77 CARGO 234027 	250-530/HI11401 FEATURES Diodes: 6-35A Ampere Diameter OD: 115mm With M8×45.6mm Battery Post With M5×31.6mm Mounting Bolt For use on: Opel Corsa, Vectra REFERENCES.. HITACHI L170G-23203 97122644 TRANSPO IHR749 MOBILETRON RH-48 CARGO 230094 250-531/HI11401A FEATURES Diodes: 6-35A Avalanche 


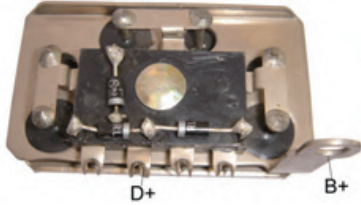

250-540/HI11402 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×51mm Battery Post With M5×42.5mm Mounting Bolt REFERENCES.. HITACHI L180G-8320 CARGO 333052 MOBILETRON RH-74A  Φ114mm	250-560/HI11403 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M8×45.6mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI NO GD109578B, L170G-13201 NISSAN NO 23230-0M000, 23230-0W000 CQ NO CQ1080555 250-561/HI11403A FEATURES Diodes: 8-35 Ampere  W- B+ Φ114mm	250-610/HI11405 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×20.3mm Battery Post REFERENCES.. HITACHI LR160-727 LR180-741H TRANSPO IHR778 MOBILETRON RH-32 CARGO 230662 250-611/HI11405A FEATURES Diodes: 6-35A Avalanche 250-650/HI11405-1 FEATURES Diodes: 8-35 Ampere REFERENCES.. TRANSPO IHR783  W B+ Φ114mm
250-690/HI11406 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M5×18.5mm Battery Post With M5×31.6mm Mounting Bolt 250-691/HI11406A FEATURES Diodes: 8-35A Avalanche  W B+ Φ114mm	250-700/HI11407 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×20.3mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI LR185-701H LR190-724 TRANSPO IHR775 MOBILETRON RH-33 250-701/HI11407A FEATURES Diodes: 8-35A Avalanche REFERENCES.. HITACHI 0901-0027 TRANSPO IHR744  B+ W Φ114mm	250-710/HI11407-1 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×20.3mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. CARGO 235889 TRANSPO IHR741 MOBILETRON RH-78  B+ W Φ114mm
250-740/HI11407A-161 FEATURES Diodes: 8-35A Avalanche Diameter OD: 114mm With M6×51mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. TRANSPO IHR780 MOBILETRON RH-66A  B+ W Φ114mm	250-770/HI11408 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×20.3mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI L190G-43205 TRANSPO IHR737 MOBILETRON RH-76 CARGO 234315 250-771/HI11408A FEATURES Diodes: 8-35A Avalanche  W B+ Φ114mm	250-790/HI11409 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With (M8+M4)×55.4mm Battery Post With (M5+M4)×41.8mm Mounting Bolt REFERENCES.. HITACHI L1100-501B CARGO 231081 250-791/HI11409A FEATURES Diodes: 8-35A Avalanche 250-A10/HI11416 FEATURES Diodes: 6-35 Ampere  W B+ Φ114mm





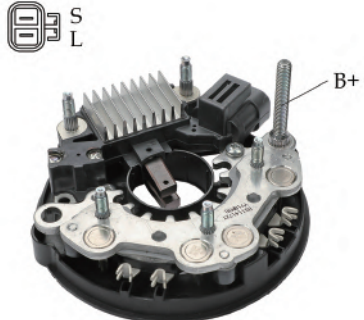
250-810/HI11410 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×20.3mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI LR170-757B L190G-13205 TRANSPO IHR738 MOBILETRON RH-70 250-811/HI11410A FEATURES Diodes: 8-35A Avalanche REFERENCES.. MOBILETRON RH-69 TRANSPO IHR739  W Φ114mm B+	250-860/HI11411 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M6×51mm Battery Post With (M5+M4)×41.8mm Mounting Bolt REFERENCES.. HITACHI L190G-33201 L190G-83204 CARGO 138617  W Φ114mm B+	250-880/HI11412 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M8×45.6mm Battery Post REFERENCES.. HITACHI L160G-53201 LR235-705 MOBILETRON RH-65 250-881/HI11412A FEATURES Diodes: 8-35A Avalanche  W Φ114mm B+
250-910/HI11413 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×48mm Battery Post With Trio REFERENCES..  W Φ114mm B+	251-020/HI10001F FEATURES Diodes: 6-35 Ampere Diameter OD: 100mm With M5×31mm Mounting Bolt With Trio REFERENCES.. HITACHI L135-6320 CARGO 135466 TRANSPO IHR733 MOBILETRON RH-19  W Φ100mm B+	251-040/HI10002F FEATURES Diodes: 6-35 Ampere Dish Diameter OD: 100mm With M5×43mm Battery Post With M5×31mm Mounting Bolt With Trio REFERENCES.. HITACHI L135-3320 L135-332000 CARGO 132406 TRANSPO IHR734 MOBILETRON RH-20  W Φ100mm B+
251-070/HI10003F FEATURES Diodes: 6-35 Ampere Diameter OD: 100mm With M5×31mm Mounting Bolt REFERENCES.. HITACHI L140-23201 CARGO 132410 TRANSPO IHR727 MOBILETRON RH-16  W Φ100mm B+	251-101/HI10004Fg FEATURES Diodes: 6-35 Ampere Dish Diameter OD: 100mm With M5×31mm Mounting Bolt With Trio REFERENCES.. HITACHI L140-53201 CARGO 135757 TRANSPO IHR728 MOBILETRON RH-17  W Φ100mm B+	251-190/HI11101F FEATURES Diodes: 6-35 Ampere Diameter OD: 111mm With M5×43mm Battery Post With M5×31mm Mounting Bolt With Trio REFERENCES.. HITACHI L150-13204 CARGO 131599 TRANSPO IHR604 MOBILETRON RH-02  W Φ111mm B+


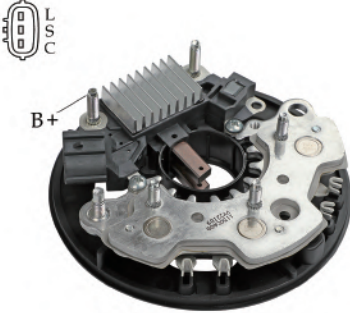

251-240/HI11102F FEATURES Diodes: 6-35 Ampere Diameter OD: 111mm With M5×43mm Battery Post With M5×31mm Mounting Bolt With Trio REFERENCES.. HITACHI L150-13206 CARGO 131600 TRANSPO IHR710 MOBILETRON RH-03  Φ111mm	251-260/HI11103F FEATURES Diodes: 6-35 Ampere Diameter OD: 111mm With M5×31mm Mounting Bolt REFERENCES.. HITACHI L150-13205 CARGO 131602 TRANSPO IHR711 MOBILETRON RH-06  Φ111mm	251-280/HI11104F FEATURES Diodes: 6-35 Ampere Diameter OD: 111mm With M5×31mm Mounting Bolt With Trio REFERENCES.. HITACHI L150-13202 TRANSPO IHR713 MOBILETRON RH-08  Φ111mm
251-300/HI11105FE FEATURES Diodes: 6-35 Ampere Dish Diameter OD: 111mm With M5×43mm Battery Post With M5×31mm Mounting Bolt REFERENCES.. HITACHI L150-13202 CARGO 132051 TRANSPO IHR715 MOBILETRON RH-09  Φ111mm	251-340/HI11106F FEATURES Diodes: 6-35 Ampere Diameter OD: 111mm With M5×31mm Mounting Bolt With Trio REFERENCES.. HITACHI L140-13202 L140-53202 CARGO 131603 TRANSPO IHR723 MOBILETRON RH-04  Φ111mm	251-380/HI11107FE FEATURES Diodes: 6-35 Ampere Diameter OD: 111mm With M5×39mm Mounting Bolt With Trio REFERENCES..  Φ111mm
251-400/HI11108g FEATURES Diodes: 6-35 Ampere dish Diameter OD: 111mm With M5×39mm Mounting Bolt With M5×31mm Mounting Bolt REFERENCES.. HITACHI L150-M13201 L150-M13202 CARGO 131601 TRANSPO IHR712 IHR712HD  Φ111mm	251-470/HI11124F FEATURES Diodes: 6-35 Ampere Diameter OD: 111mm With M5×43mm Mounting Post With M5×23mm Mounting Bolt With Trio REFERENCES..  Φ111mm	251-500/HI11128F FEATURES Diodes: 6-35 Ampere Diameter OD: 111mm With M5×43mm Battery Bolt With M5×31mm Mounting Bolt With Trio REFERENCES..  Φ111mm





251-510/HI11129F FEATURES Diodes: 6-35 Ampere Diameter OD: 111mm With M5×39mm Mounting Bolt With Trio REFERENCES.. 	251-650/HI11801F FEATURES Diodes: 6-35 Ampere Diameter OD: 118mm With M5×43mm Battery Post With M5×31mm Mounting Bolt With Trio REFERENCES.. HITACHI L150-13203 L150-13230 CARGO 131598 TRANSPO IHR603 MOBILETRON RH-01 	251-660/HI11802F FEATURES Diodes: 6-35 Ampere Diameter OD: 118mm With M5×31mm Mounting Bolt With Trio REFERENCES.. HITACHI L160-23201 CARGO 132053 TRANSPO IHR607 MOBILETRON RH-14 
251-680/HI11803F FEATURES Diodes: 6-35 Ampere Diameter OD: 118mm With M5×31mm Mounting Bolt With Trio For use on: Nissan with 70 Ampere Alternators, Isuzu NPR REFERENCES.. HITACHI L160-23202 L160-43202 CARGO 135037 TRANSPO IHR721 MOBILETRON RH-15 	251-690/HI11804F FEATURES Diodes: 6-35 Ampere Diameter OD: 118mm With M5×31mm Mounting Bolt With Trio The Same As HI11803 Except Adding A Wire REFERENCES.. HITACHI L160-3320 L150-13203 CARGO 131598 TRANSPO IHR605 MOBILETRON RH-11 	251-700/HI11805F FEATURES Diodes: 6-35 Ampere Diameter OD: 118mm With M6×35.2mm Battery Post With M5×46.5mm Mounting Bolt With M5×41mm Mounting Bolt With Trio REFERENCES.. 
251-710/HI11806F FEATURES Diodes: 6-35 Ampere Diameter OD: 118mm With M6×35.2mm Battery Post With M5×46.5mm Mounting Bolt With M5×41mm Mounting Bolt With Trio REFERENCES.. 	251-720/HI11810F FEATURES Diodes: 8-35 Ampere Diameter OD: 118mm With Trio REFERENCES.. 	251-730/HI12601 FEATURES Diodes: 6-25 Ampere Diameter OD: 126mm With M5×21mm Mounting Bolt With Trio REFERENCES.. NIKKO 0337302190 CARGO 135681 





251-740/HI12602 FEATURES Diodes : 6-25 Ampere Diameter OD : 126mm With M5×48.5mm Battery Post With M5×53.5mm Trio Post With Trio With 150 Ohm Resistor REFERENCES..  Φ126mm	251-750/HI12603 FEATURES Diodes : 6-25 Ampere Diameter OD : 126mm With M5×30mm Battery Post With Trio With Capacitor With 150 Ohm Resistor REFERENCES..  Φ126mm	251-760/HI13201 FEATURES Diodes: 8-25 Ampere Diameter OD: 132mm With M6×33.5mm Battery Post With Trio REFERENCES.. NIKKO 0357300270 CARGO 234578 ISUZU 1812191070  Φ132mm
251-830/HI10013FE FEATURES Diodes: 6-50 Ampere Diameter OD: 100mm With M6×44.4mm Battery Post With (M5+M4)×39.8mm Mounting Bolt With Trio For use on: Nissan 200SX, Nissan Sentra, Subaru REFERENCES.. HITACHI LR150-704 L170-9320 CARGO 132098 TRANSPO IHR719 MOBILETRON RC-39C  Φ100mm	251-840/HI10014FE FEATURES Diodes: 8-50 Ampere Diameter OD: 100mm With M6×44.4mm Battery Post With (M5+M4)×39.8mm Mounting Bolt With Trio For use on: Subaru XT Coupe, Nissan Axxess REFERENCES.. HITACHI L165-320 L165-7320 CARGO 133377 TRANSPO IHR720 MOBILETRON RC-40C  Φ100mm	251-890/HI1130F FEATURES Diodes: 6-50 Ampere Diameter OD: 111mm With M6×35.2mm Battery Post With M5×31mm Mounting Bolt With M5×43mm Battery Bolt With Trio REFERENCES..  Φ111mm
252-010/HI11116 FEATURES Diodes: 6-35 Ampere Press Fit Diode Diameter OD: 111mm With M5×33.5mm Mounting Bolt With Trio With Aluminum Heat sinks REFERENCES.. HITACHI L140-13202 L140-53202 CARGO 131603 TRANSPO IHR723 MOBILETRON RC-04  Φ111mm	252-440 FEATURES Diodes: 8-50A Avalanche Diameter OD: 111mm With M8×49mm Battery Post With Trio REFERENCES.. LESTER 23098 MOBILETRON RK-04 FIT UNIT 37300-27011 37300-27013  Φ111mm	253-010/HIF5001 FEATURES Diodes: 6-25 Ampere Button With M5×32.6mm Mounting Bolt For use on: Nissan, Isuzu, Subaru, Yanmar, Nissan Forklifts REFERENCES.. HITACHI L125-6320 L125-8320 CARGO 130618 TRANSPO IHR1000 MOBILETRON RH-49  Φ111mm

150-720 FEATURES Diodes: 12-35A Avalanche With M8×49mm Battery Post Complete set with REC HI11330A+REG(05-1061) 14V REFERENCES.. WAI IHR765+IH745 TRANSPO 48-8111 HITACHI LR1130-702 	253-050/HIF5004 FEATURES Diodes: 6-35 Ampere With M5×36mm Mounting Bolt With Trio For use on: Nissan REFERENCES.. HITACHI 21511112 UBJ105 CARGO 134386 TRANSPO IHR1002 MOBILETRON RH-50 	254-010/HI12001A FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Without Trio For used on: NISSAN TIIDA REFERENCES.. 
254-030 FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Without Trio REFERENCES.. 	254-040 FEATURES Diodes:12-50A Avalanche With M8×40mm Battery Post Without Trio REFERENCES.. LESTER 20633 11639 11852 FIT UNIT LR1180-856/857/858 	150-A01/HI11405ZT FEATURES Diodes: 6-35 Ampere Complete set with REC HI11405+REG (05-0151) 14V REFERENCES.. HITACHI LR160-727 LR180-741H LESTER 13636 13644 TRANSPO IHR778+IH767 150-A00/HI11405AZT FEATURES Diodes: 6-35A Avalanche Complete set with REC HI11405A+REG (05-0151) 14V 
150-A11/HI11406ZT FEATURES Diodes: 8-35A Ampere Complete set with REC HI11406+REG (05-0151) 14V REFERENCES.. HITACHI LR160-727 LESTER 13644 TRANSPO HI11406778+IH767 150-A10/HI11406AZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11406A+REG (05-0151) 14V 	150-A40/HI11407AZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11407A+REG(05-0251)14V For use on: Subaru Legacy REFERENCES.. LESTER 13645 TRANSPO IHR744+ IH765 150-A30/HI11407A-1ZT FEATURES With M8×50.5mm Battery Post REC HI11407A-1+REG (05-0251) 14V REFERENCES.. HITACHI LR160-728 TRANSPO IHR775+IH765 	150-A81/HI11408ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11408+REG (05-0151) 14V REFERENCES.. HITACHI LR190-737 23100-OW001 TRANSPO IHR737+IH767 150-A80/HI11408AZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11408A+REG(05-0151)14V 

150-AB0/HI11409ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11409+REG (05-009H) 14V REFERENCES.. HITACHI LR1100-501B 150-AA0/HI11409AZT FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11409A+REG(05-009H)14V 	150-AC1/HI11410ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11410+REG (05-001H) 14V REFERENCES.. FIT UNIT LR1100-723 LR1100-709 LESTER 13760 13828 TRANPO IHR738+IH738 150-AC0/HI11410AZT FEATURES Diodes: 8-35A Avalanche REC HI11410A+REG(05-001H)14V 	150-AG0/HI11410AZT-2 FEATURES Diodes: 8-35A Avalanche Complete set with REC HI11410A+REG (05-055H)14V REFERENCES.. HITACHI LR170-757BR 
150-AJ0/HI11411ZT FEATURES Diodes: 6-35A Ampere Complete set with REC HI11411+REG (05-035H) 14V REFERENCES.. HITACHI LR170-502B 150-AQ0/HI11416ZT FEATURES With (M8+M4) ×55.4mm Battery Post Complete set with REC HI11416+REG (05-035H)14V 	150-AM0/HI11412ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11412+REG (05-0251) 14V REFERENCES.. HITACHI LR160-728E 150-AL0/HI11412-1ZT FEATURES With M8×50.5mm Battery Post Complete set with REC HI11412+REG (05-0251) 14V REFERENCES.. FIT UNIT JA1516IR 	150-AN0/HI11413ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11413+REG (05-002) 14V REFERENCES.. 
150-AP0/HI11414ZT FEATURES Diodes: 6-35 Ampere Complete set with REC HI11414+REG (05-0151) 14V For use on: Nissan Pick-up, Pathfinder REFERENCES.. LESTER 13728 TRANPO IHR745+IH767 	150-AS0/HI11417ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11417+REG (05-001H) 14V 150-AR0/HI11417-1ZT FEATURES With M8×49mm Battery Post REC HI11417-1+RE(05-001H) 14V 	150-AU0/HI11423-1ZT FEATURES Diodes: 8-35A Ampere Complete set with REC HI11423-1+REG(05-054H)14V 150-AV0/HI11423-2ZT FEATURES Diodes: 6-35 Ampere With M8×45.6mm Battery Bolt REC HI11423-2+REG(05-054H)14V REFERENCES.. HITACHI LR190-747 

150-AX0/HI11424ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11424+REG (05-054H)14V REFERENCES.. HITACHI LR190-744 LESTER 13825 TRANSPO IHR764+IH744 	150-AZ0/HI11427AZT1 FEATURES Diodes: 8-60A Avalanche Complete set with REC HI11427+REG(05-041H)14V REFERENCES.. HITACHI LR190-742 LESTER 13829 TRANSPO IHR742+IH742 	150-B20/HI11430ZT FEATURES Diodes: 8-35 Ampere Complete set with REC HI11430+REG (05-054H) 14V REFERENCES.. HITACHI LR180-763 
150-BY0/HI11330AZT FEATURES Diodes: 12-35A Avalanche Complete set with REC 1250BM00+REG(05-1061)14V REFERENCES.. HITACHI LR1130-702 TRANSPO IHR765+IH745 	150-C70 FEATURES Diodes: 12-35A Avalanche Complete set with REC HI11322A+REG(05-096) 14V REFERENCES.. LESTER 11165 TRANSPO IHR765+IH747 	150-CA0 FEATURES Diodes: 6-50A Avalanche Complete set with REC 1250BY00 + REG(05-096)14V REFERENCES.. LESTER 11121 TRANSPO IHR771+IH741 
150-CL0 FEATURES Diodes: 6-60A Avalanche Complete set with REC 1250BY00 + REG(13509000) 14V REFERENCES.. FIT UNIT LR1100-717 	150-CP0 FEATURES Diodes:8-35A Avalanche Complete set with REC 1250C500+REG 13509400 14V REFERENCES.. CARGO 114672 LESTER 12042 FIT UNIT AHI0151/LR160-741 ALT32113 	150-DM0 FEATURES Diodes:8-35A Avalanche With M5×35mm Battery Post Complete set with REC 1250CK00+REG 13509400 14V REFERENCES.. 

150-DTO FEATURES Diodes:8-50A Avalanche Complete set with REC 1250CM00+REG(13503600) 14V REFERENCES.. 	150-DVO FEATURES Diodes: 6-50A Avalanche Complete set with REC 12503910+REG(05-096) 14V REFERENCES.. LESTER 11119 WAI IH741+IHR786 FIT UNIT LR1110-724 	150-DYO FEATURES Diodes:8-35A Avalanche With M8×50.5mm Battery Post Complete set with REC 1250CQ00+REG 05-016H 28V REFERENCES.. LESTER 20619 FIT UNIT LR270-702 
150-EDO FEATURES Diodes:8-35A Avalanche With M6×51mm Battery Bolt Complete set with REC 12502100+REG(13509700) 28V REFERENCES.. MOBILETRON RV-H017 FIT UNIT LR280-508 8973515740 	150-EFO FEATURES Diodes:8-35A Avalanche With M8×50.5mm Battery Post Complete set with REC HI11302A-2+REG 1350F000 14V REFERENCES.. FIT UNIT LR160-506 8976956020 	250-A00/HI11414 FEATURES Diodes: 6-35 Ampere Diameter OD: 114mm With M8×49mm Battery Post For use on: Nissan Pick-up Pathfinder REFERENCES.. HITACHI LR170-745 LR160-727 CARGO 13728 13643 TRANSPO IHR745 MOBILETRON RH-30 
250-A20/HI11417 FEATURES Diodes: 8-35 Ampere Diameter OD: 114mm With M6×48mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. CARGO 235226 250-A30/HI11417-1 FEATURES With M8×49mm Battery Post 	250-A40/HI11418A FEATURES Diodes: 6-35A Avalanche Diameter OD: 114mm With M6×51mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI LR160-730 LR160-730C LR160-731 LESTER 13745 13757 TRANSPO IHR781 	250-A50/HI11418A-1 FEATURES Diodes: 6-35A Avalanche Diameter OD: 114mm With M6×51mm Battery Post With M5×31.6mm Mounting Bolt REFERENCES.. HITACHI LR160-729C CARGO 234909 LESTER 13744 TRANSPO IHR782 MOBILETRON RH-79 

250-AB0/HI11423 FEATURES Diodes : 6-35 Ampere Diameter OD : 114mm With M6×20.3mm Battery Post Without Trio REFERENCES.. HITACHI LR170-758 LR180-766 LESTER 13788 13895 TRANSP0 IHR762 250-AC0/HI11423-1 FEATURES Diodes : 8-35 Ampere 250-AD0/HI11423-2 FEATURES Diodes : 6-35 Ampere With M8×45.6mm Battery Post  B+ Φ114mm	250-AE0/HI11424 FEATURES Diodes : 8-35 Ampere Diameter OD : 114mm With M6×48mm Battery Post Without Trio REFERENCES.. HITACHI LR190-744/761/743 CARGO 234829 TRANSP0 IHR764 MOBILETRON RH-82 LESTER 13825 13935  B+ W Φ114mm	250-AR0/HI10301 FEATURES Diodes: 6-35 Ampere Diameter OD: 103 mm With M5×16.6mm Battery Post With Trio For use on: Nissan Pickup, Pathfinder, Subaru Legacy REFERENCES.. HITACHI L180-13202 CARGO 135040 TRANSP0 IHR752 MOBILETRON RH-23  D+ B+ Φ103mm
250-AS0/HI10302 FEATURES Diodes: 6-35 Ampere Diameter OD: 103mm With M6×34mm Battery Post With M5×31.6mm Mounting Bolt With Trio For use on: Honda, Isuzu, Nissan Sentra REFERENCES.. HITACHI L150-711 CARGO 138695 TRANSP0 IHR757 MOBILETRON RH-28  D+ B+ Φ103mm	250-AT0/HI10303 FEATURES Diodes: 8-35 Ampere Diameter OD: 103 mm With M5×16.6mm Battery Post Without Trio For use on: Nissan Pulsar, Sentra REFERENCES.. HITACHI L170-23203 CARGO 135039 TRANSP0 IHR753 MOBILETRON RH-24  B+ W Φ103mm	250-AU0/HI10304 FEATURES Diodes: 6-35 Ampere Diameter OD: 103 mm With M5×16.6mm Battery Post With M5×31.6mm Mounting Bolt Without Trio For use on: Nissan Altima, Axxess REFERENCES.. HITACHI L180G-7320 LR180-725C CARGO 139464 TRANSP0 IHR758 MOBILETRON RH-29  B+ W Φ103mm
250-AV0/HI10305 FEATURES Diameter OD: 103 mm With M6×43mm Battery Post With M5×31.6mm Mounting Bolt With Trio REFERENCES.. HITACHI L170-43202 CARGO 136650 TRANSP0 IHR751 MOBILETRON RH-22  D+ B+ Φ103mm	250-AW0/HI10306 FEATURES Diodes: 8-35A Ampere Diameter OD: 103mm With M6×43mm Battery Post With M5×31.6mm Mounting Bolt Without Trio For use on: Nissan Sentra REFERENCES.. HITACHI L170-G2320 CARGO 135318 TRANSP0 IHR754 MOBILETRON RH-25 250-B00/HI10310 FEATURES With M6×34mm Battery Post  B+ W Φ103mm	250-AX0/HI10307 FEATURES Diodes: 8-35A Ampere Diameter OD: 103mm With M6×43mm Battery Post With M5×31.6mm Mounting Bolt With Trio For use on: Honda, Isuzu, Nissan Sentra REFERENCES.. HITACHI L170-G1320 CARGO 136976 TRANSP0 IHR755 MOBILETRON RH-26  D+ B+ Φ103mm


250-AY0/HI10308

FEATURES Diodes: 6-35A Ampere
Diameter OD: 103 mm
With M5×16.6mm Battery Post
With M5×31.6mm Mounting Bolt
With Trio
For use on: Infiniti G20, Nissan Sentra,
NX2000

REFERENCES..
HITACHI L180-13202
CARGO 135040
TRANSPO IHR756
MOBILETRON RH-23


250-AZ0/HI10309


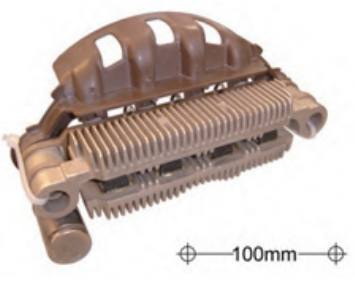
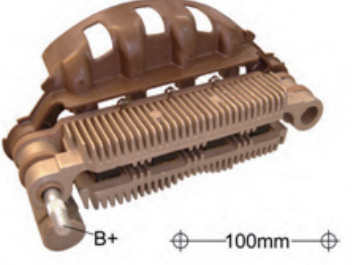

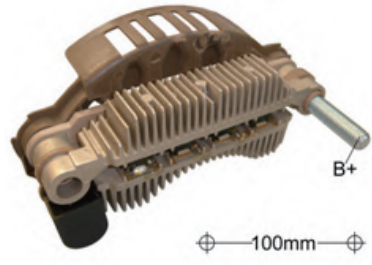


FEATURES Diodes: 6-35 Ampere

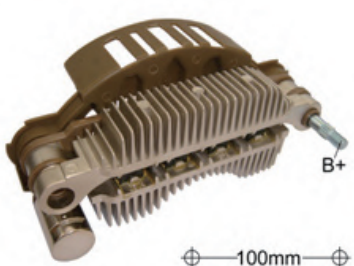
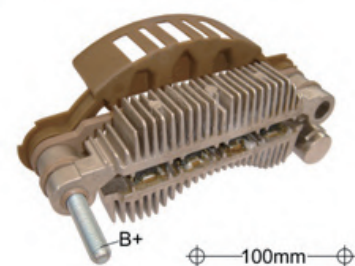
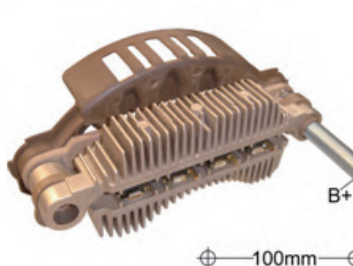
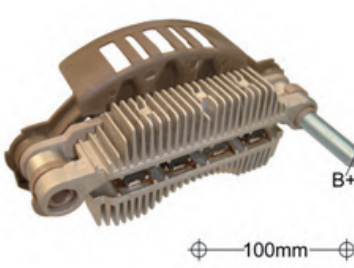
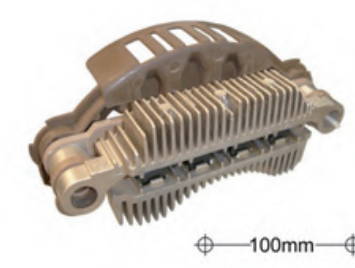
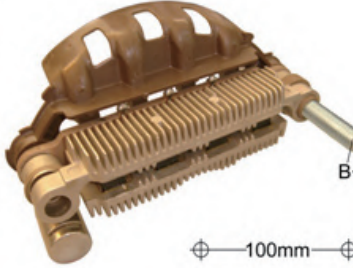
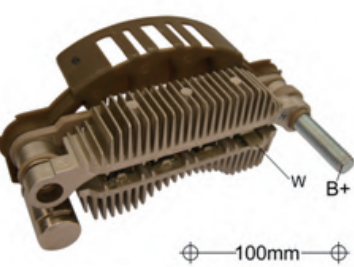
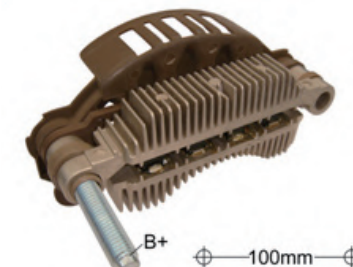
**250-B10/HI10311**


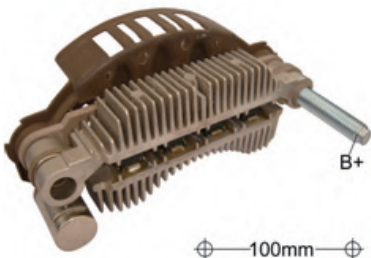
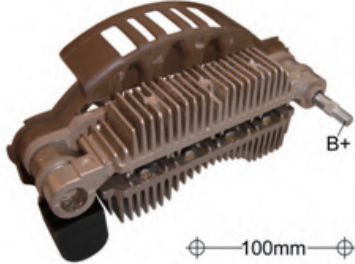
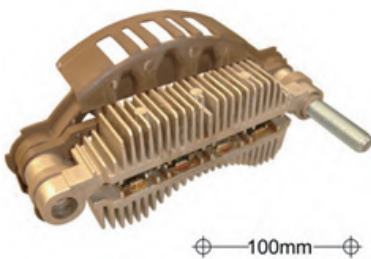
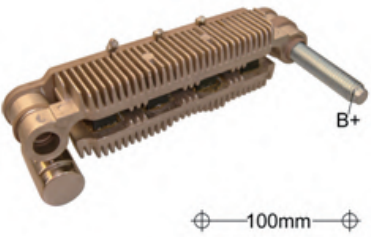
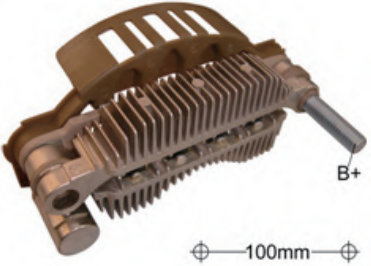
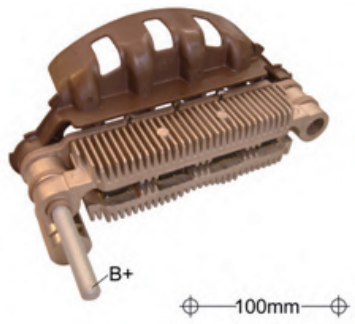

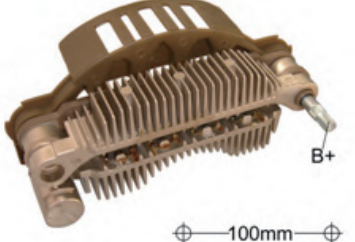
FEATURES Diodes: 8-35A Ampere
Diameter OD: 103mm
With M5×31.6mm Mounting Bolt
For use on: Subaru Legacy 2.2L 70Amp






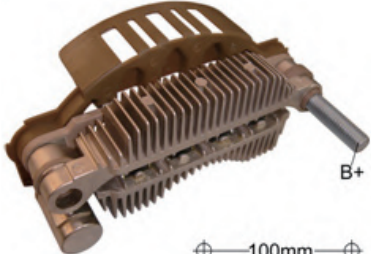


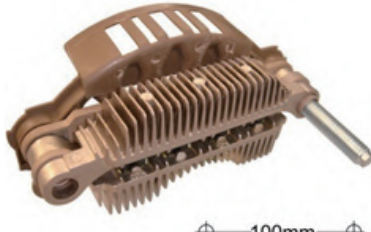
REFERENCES..
HITACHI L170-33202
CARGO 135038
TRANSPO IHR750
MOBILETRON RH-21







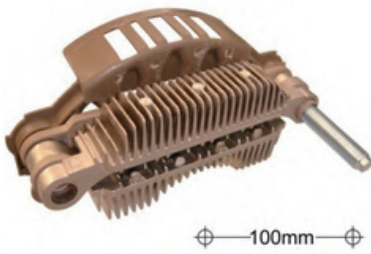

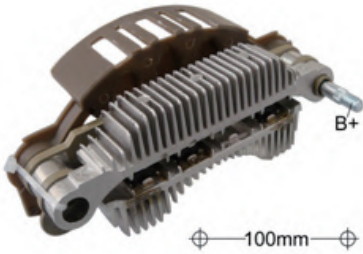


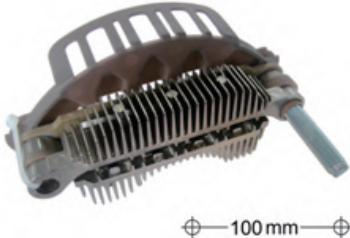
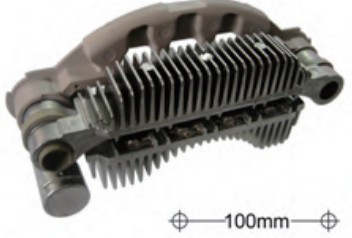

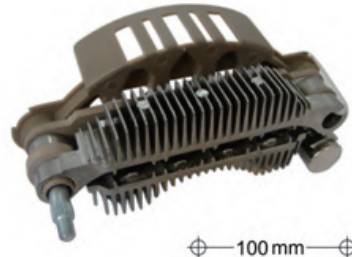
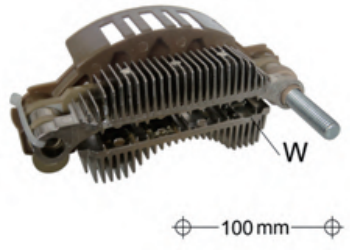
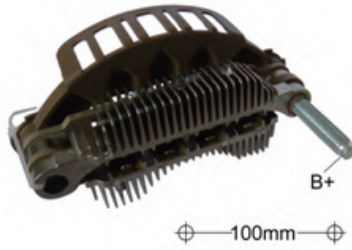
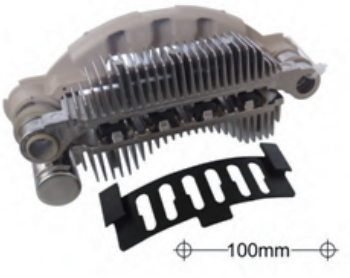
260-100/MIA10002 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With Trio For use on:Mitsubishi Van & Wagon, Dodge Eagle, Chrysler Imports REFERENCES.. mitsubishi A860T23070 A860T28070 CARGO 132793 MOBILETRON RM-40 TRANSP0 IMR10042 	260-031/MIA10083A FEATURES Diodes:8-35A Avalanche Mounting Length:100mm With M8×59.5mm Battery Post With Trio REFERENCES.. 	260-090/MIA10001 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With M6×49.5mm Battery Post With Trio For use on: Ford Thunderbird, Mercury Cougar, Hyundai Alliance REFERENCES.. mitsubishi A860T35270 E9PZ10304B CARGO 135252 MOBILETRON RM-41 TRANSP0 IMR10040 
260-110/MIA10003 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With M5×44mm Battery Post With Trio For use on:Subaru XT REFERENCES.. mitsubishi A860T23070 A860T28070 CARGO 132793 MOBILETRON RM-40 TRANSP0 IMR10042 	260-120/MIA10004 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With M5×44mm Battery Post With Trio With Capacitor 260-760/MIA10075 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With M6×49.5mm Battery Post 	260-130/MIA10005 FEATURES Diodes:6-35 Ampere Mounting Length:100mm With M6×49.5mm Battery Post With Trio/Capacitor For use on:Mitsubishi 3000GT, Diamante REFERENCES.. mitsubishi A860T36070 MD618422 CARGO 139269 TRANSP0 IMR10048 260-140/MIA10006 FEATURES Diodes:8-35Ampere Mounting Length:100mm With M6×49.5mm Battery Post With Trio/Capacitor REFERENCES.. mitsubishi A860T23370 CARGO 137486 TRANSP0 IMR10050 MOBILETRON RM-43 
260-150/MIA10007 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With M8×54mm Battery Post With Trio/Capacitor For use on:Ford Taurus SHO REFERENCES.. mitsubishi A860T33970 CARGO 135900 TRANSP0 IMR10060 MOBILETRON RM-48 	260-160/MIA10008 FEATURES Diodes:8-35Ampere Mounting Length:100mm With M6×49.5mm Battery Post With Trio/Capacitor For use on:Ford Taurus SHO REFERENCES.. mitsubishi A860T42070 TRANSP0 IMR10062 MOBILETRON RM-47 260-430/MIA10038 FEATURES Diodes:6-30Ampere Mounting Length:100mm With M6×49.5mm Battery Post 	260-170/MIA10009 FEATURES Diodes:8-35Ampere Mounting Length:100mm With M8×54mm Battery Post With Trio/Capacitor For use on:Mazda 929 REFERENCES.. mitsubishi A860T36770 JE4818W60B TRANSP0 IMR10066 MOBILETRON RM-45 CARGO 135901 260-200/MIA10012 FEATURES Diodes: 6-35Ampere REFERENCES.. mitsubishi A860X52570 ME701439 TRANSP0 IMR10096 MOBILETRON RM-170 CARGO 139427 LESTER 12602 




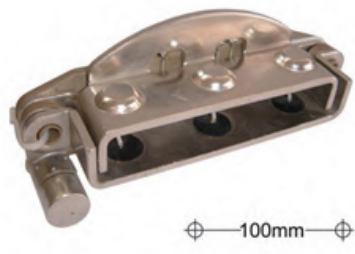

260-180/MIA10010 FEATURES Diodes:8-35Ampere Mounting Length:100mm With M5×44mm Battery Post With Trio For use on:Mazda RX7 Turbo REFERENCES.. mitsubishi A860T40270 CARGO 135882 TRANSPO IMR10068 MOBILETRON RM-46 FIT UNIT JA1518IR 	260-190/MIA10011 FEATURES Diodes:8-35Ampere Mounting Length:100mm With M6×49.5mm Battery Post With Trio/Capacitor REFERENCES.. mitsubishi A3T14292 TRANSPO IMR10088 MOBILETRON RM-125HV 	260-210/MIA10013 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With M8×59.5mm Battery Post With Trio Without Capacitor REFERENCES.. mitsubishi A860X42970 CARGO 231079 TRANSPO IMR10057 MOBILETRON RM-99HV FIT UNIT CA1317IR 
260-220/MIA10014 FEATURES Diodes:6-35Ampere Mounting Length:100mm With M8×54mm Battery Post With Trio Without Capacitor REFERENCES.. 	260-230/MIA10015 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With Trio Without Capacitor For use on:Ford Transit REFERENCES.. 	260-250/MIA10017 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With M8×54mm Battery Post With Trio REFERENCES.. 
260-260/MIA10018 FEATURES Diodes:8-35Ampere Mounting Length:100mm With M8×54mm Battery Post With "W" Terminal With Trio REFERENCES.. mitsubishi A3TN6188ZJ 260-290/MIA10021 FEATURES Diodes:6-35Ampere 	260-280/MIA10020 FEATURES Diodes:8-35Ampere Mounting Length:100mm With M5×44mm Battery Post With Trio Without Capacitor For use on:Ford Ambulance and Emergency REFERENCES.. CARGO 234310 TRANSPO IMR10052 260-350/MIA10030 FEATURES Diodes:8-35Ampere Mounting Length:100mm With M5×44mm Battery Post With Trio Without Capacitor 	260-310/MIA10023 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With M8×59.5mm Battery Post With M5×35mm Mounting Bolt With Trio Without Capacitor REFERENCES.. 


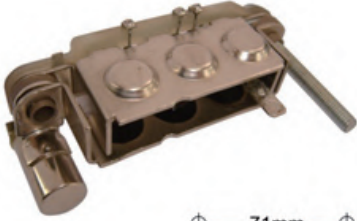
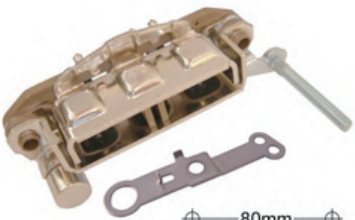
260-320/MIA10025 FEATURES Diodes:8-35 Ampere Mounting Length:100mm With M6×49.5mm Battery Post With Trio/ Capacitor REFERENCES.. 	260-330/MIA10028 FEATURES Diodes:8-35Ampere Mounting Length:100mm With M8×59.5mm Battery Post With Trio/Capacitor REFERENCES.. MITSUBISHI A3TA3791 A3T12792 	260-340/MIA10029 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With M5×44mm Battery Post With Trio For use on: Ford Probe, Mazda626, Mazda MX6 REFERENCES.. MITSUBISHI A860T38670 A860T40270 135882 CARGO RM-46 MOBILETRON IMR10064 TRANSPO 
260-360/MIA10031 FEATURES Diodes: 8-35Ampere Mounting Length: 100mm With M8×54mm Battery Post With Trio Without Capacitor REFERENCES.. 	260-370/MIA10032 FEATURES Diodes: 8-35Ampere Mounting Length: 100mm With M8×59.5mm Battery Post With Trio/Capacitor REFERENCES.. 	260-380/MIA10033 FEATURES Diodes: 8-35 A Avalanche Mounting Length: 100mm With M8×54mm Battery Post Without Trio With Capacitor REFERENCES.. 
260-390/MIA10034 FEATURES Diodes: 8-35Ampere Mounting Length: 100mm With M6×60mm Battery Post With Trio/ Capacitor REFERENCES.. 	260-400/MIA10035 FEATURES Diodes: 8-35A Avalanche Mounting Length: 100mm With M8×59.5mm Battery Post Without Trio/ Capacitor For use on: 1999-2001Mercury Villager Van3.3L(125A) REFERENCES.. MITSUBISHI A860X64570 23124-4P116 230884 CARGO 11051 11096 23075 LESTER IMR10046 TRANSPO 260-410/MIA10036 FEATURES Diodes:8-35 A Ampere Mounting Length: 100mm With M8×59.5mm Battery Post REFERENCES.. MOBILETRON RM-134 TRANSPO IMR10058 	260-420/MIA10037 FEATURES Diodes: 8-35A Mounting Length: 100mm With M5×44mm Battery Post With Trio With Capacitor REFERENCES.. MITSUBISHI A860T41370 TRANSPO IMR10070 

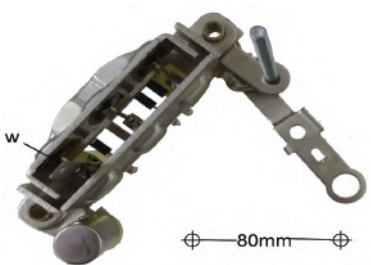

260-440/MIA10039 FEATURES Diodes: 8-35A Mounting Length: 100mm With M5×44mm Battery Post With Trio With Capacitor REFERENCES.. mitsubishi A860X47070 CARGO 139111 MOBILETRON RM-116 260-540/MIA10049 FEATURES Diodes: 8-35A With M8×59.5mm Battery Post 	260-460/MIA10041 FEATURES Diodes: 8-35A Mounting Length: 100mm With M8×59.5mm Battery Post With Trio With Capacitor REFERENCES.. 	260-470/MIA10042 FEATURES Diodes: 6-35A Mounting Length: 100mm With M5×44mm Battery Post With Trio With Capacitor REFERENCES.. mitsubishi A860T29770 CARGO 236816 
260-480/MIA10043 FEATURES Diodes: 8-35A Mounting Length: 100mm With M6×44.5mm Battery Post Without Trio Without Capacitor REFERENCES.. mitsubishi A860X79470 MOBILETRON RM-127 TRANSPO IMR10081 	260-490/MIA10044 FEATURES Diodes: 8-35A Mounting Length: 100mm With M6×44.5mm Battery Post Without Trio Without Capacitor REFERENCES.. mitsubishi RM-131HV TRANSPO IMR10090 260-500/MIA10045 FEATURES Diodes: 8-35A With Capacitor 	260-510/MIA10046 FEATURES Diodes: 8-35 A Mounting Length: 100mm With M8×59.5mm Battery Post Without Trio With Capacitor REFERENCES.. 
260-530/MIA10048 FEATURES Diodes: 8-35A Mounting Length: 100mm With M5×44mm Battery Post Without Trio/Capacitor REFERENCES.. mitsubishi A3TG0091 A3TG0081 	260-550/MIA10050 FEATURES Diodes: 8-35A Mounting Length: 100mm With M6×49.5mm Battery Post With Trio With Capacitor REFERENCES.. mitsubishi A2T80378 260-590/MIA10054 FEATURES Diodes: 8-35A With M6×60mm Battery Post 	260-560/MIA10051 FEATURES Diodes: 8-35A Avalanche Mounting Length: 100mm With M8×54mm Battery Post Without Trio Without Capacitor REFERENCES.. 


260-570/MIA10052 FEATURES Diodes: 8-35A Mounting Length: 100mm With M5×44mm Battery Post Without Trio Without Capacitor REFERENCES.. MITSUBISHI A860X66270 CARGO 239995 MOBILETRON RM-195 TRANSPO IMR10047 1260F400 FEATURES Diodes: 8-35A Avalanche 	260-580/MIA10053 FEATURES Diodes: 8-35A Mounting Length: 100mm With M6×60mm Battery Post With Trio With Capacitor REFERENCES.. 	260-602 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With Trio/Capacitor REFERENCES.. CARGO 113792 LESTER 23791 FIT UNIT 0 986 080 640 37300-4A110 37300-4A111 37300-4A112 37300-4A113 MOBILETRON RM-191H 
260-660/MIA10062 FEATURES Diodes: 8-35A Mounting Length: 100mm With M6×44.5mm Battery Post Without Trio Without Capacitor REFERENCES.. 	260-670/MIA10063 FEATURES Diodes: 6-35A Mounting Length: 100mm With M8×54mm Battery Post Without Trio Without Capacitor REFERENCES.. MITSUBISHI ME701569 A866X52570 CARGO 234305 MOBILETRON RM-139 TRANSPO IMR10067 	260-690/MIA10065 FEATURES Diodes: 8-35 Ampere Mounting Length : 100mm With M5×44mm Battery Post With Trio With Capacitor REFERENCES.. MITSUBISHI A860T41370 MOBILETRON RM-54 TRANSPO IMR10070 CARGO 233518 233749 
260-700/MIA10067 FEATURES Diodes: 6-35A Avalanche Mounting Length: 100mm With M8×59.5mm Battery Post Without Trio Without Capacitor REFERENCES.. MITSUBISHI A3TG1991 LESTER 11052 11097 11377 11420 MOBILETRON RM-201 TRANSPO IMR10045 	260-730/MIA10071 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With M8×54mm Battery Post With "W" Terminal With Trio With Capacitor REFERENCES.. LESTER 12604, 20859 CARGO 233851 MOBILETRON RM-157H TRANSPO IMR10001 	260-750/MIA10074 FEATURES Diodes: 6-35 Ampere Diameter OD: 100mm With M5×44mm Battery Post Without Trio Without Capacitor REFERENCES.. LESTER 11118 MOBILETRON RM-184 CARGO 332501 MITSUBISHI A860X87270 



260-770/MIA10076 FEATURES Diodes: 8-35A Mounting Length: 100mm With M8×59.5mm Battery Post With Trio REFERENCES.. MITSUBISHI A4TR5188 A4TR5291AT A860X86970 A860X91870 237132 CARGO MOBILETRON RM-210HV TRANSPO IMR10055  ⌀ 100 mm	260-780/MIA10078 FEATURES Diodes: 8-35A Mounting Length: 100mm With Trio/Capacitor REFERENCES.. UTM NO EM0042B EM0042C VOLTAG AEM1282  ⌀ 100 mm	260-800/MIA10080A FEATURES Diodes: 8-35A Avalanche Mounting Length: 100mm With Trio/Capacitor REFERENCES..  ⌀ 100 mm
260-810/MIA10082 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With M8×59.5mm Battery Post REFERENCES.. MITSUBISHI A4TA8494 A4TA0594 A860X88670 TRANSPO IMR10054 CARGO 238948  ⌀ 100 mm	260-820/MIA10084A FEATURES Diodes: 8-35A Avalanche Mounting Length: 100mm With M5×44mm Battery Post With Trio/Capacitor REFERENCES.. MITSUBISHI A3TB5099 A860T31770 A860X31799 A860X34799 TRANSPO IMR10072 MOBILETRON RM-44  ⌀ 100 mm	260-840/MIA10086 FEATURES Diodes: 6-35Ampere Diameter: 100mm With M8×59.5mm Battery Post With Trio Without Capacitor REFERENCES..  ⌀ 100 mm
260-850/MIA10087 FEATURES Diodes: 8-35 Ampere Diameter: 100mm With M6×49.5mm Battery Post With Trio/Capacitor REFERENCES..  ⌀ 100 mm	260-890/MIA10092B FEATURES Diodes OD: 8-35A Avalanche Diameter: 100mm With M8×59.5mm Battery Post Without Trio/Capacitor For 24V Alternators REFERENCES..  B+ ⌀ 100 mm	260-910/MIA10095 FEATURES Diodes OD: 8-35Ampere Mounting Length: 100mm With Trio/Capacitor REFERENCES.. MITSUBISHI AF111364 JA1518IR CARGO 112333  ⌀ 100 mm







260-930/MIA6501 FEATURES Diodes: 6-35 Ampere Mounting Length: 65mm With M5×49mm Battery Post With Trio REFERENCES.. HONDA NO 31127-PEO-034 mitsubishi A860T11970 A860T13370 FORD E7GZ-10304-A E8BZ-10304-A VALEO 436524 CARGO 132039 LESTER 13265 14700 14708 14902 	260-940/MIA6502 FEATURES Diodes: 6-35 Ampere Mounting Length: 65mm With M5×49mm Battery Post With Trio For use on: Subaru Justy REFERENCES.. 	260-950/MIA6503 FEATURES Diodes: 6-35 Ampere Mounting Length: 65mm With Trio REFERENCES.. MITSUBISHI A860T16770 A860T13770 A860T27970 CARGO 132791 MOBILETRON RM-04 TRANSP0 IMR6548 
260-960/MIA6504 FEATURES Diodes: 6-35 Ampere Mounting Length: 65mm With M6×49.5mm Battery Post With Trio REFERENCES.. MITSUBISHI A860T22770 CARGO 132789 MOBILETRON RM-03 TRANSP0 IMR6540 	260-980/MIA6506 FEATURES Diodes: 6-35 Ampere Mounting Length: 65mm With M8×54mm Battery Post With Trio With Capacitor REFERENCES.. 	261-010/MIP10001 FEATURES Diodes: 6-50 Ampere Mounting Length: 100mm With Trio With Copper Heat Sinks For use on: Plymouth Coquest Mazda 626 REFERENCES.. CARGO 131547 MOBILETRON RM-74 TRANSP0 IMR10041 
261-020/MIP10002 FEATURES Diodes: 6-50 Ampere Mounting Length: 100mm With Trio Without Capacitor For use on: Dodge, Mazda REFERENCES.. MITSUBISHI A860T04170 CARGO 131227 MOBILETRON RM-75 TRANSP0 IMR10011 	261-040/MIP7001 FEATURES Diodes: 4-35 Ampere Mounting Length: 70mm Stamped steel heat sink Fore use on: MITSUBISHI REFERENCES.. MITSUBISHI 27700-170 23500-E9007 261-050/MIP7002 FEATURES Diodes: 6-30 Ampere 	261-070/MIP7103F FEATURES Diodes: 6-35 Ampere Button Mounting Length: 71mm With Trio Without Capacitor For use on: Chrysler, Dodge Plymouth REFERENCES.. MOBILETRON RM-60 MITSUBISHI A001T22971 A001T25077 FORD SBA18504-6201 CARGO 132087 LESTER 12078 12309 14231 14557 TRANSP0 IMR7111 





261-080/MIP7104F FEATURES Diodes: 6-35 Ampere Mounting Length: 71mm With M5×43mm Battery Post With Trio Without Capacitor For use on: Nissan Pickup, Pulsar REFERENCES.. MITSUBISHI A860T09470 CARGO 138974 MOBILETRON RM-88 TRANPO IMR7117  71mm	261-100/MIP7107F FEATURES Diodes: 6-35 Ampere Mounting Length: 71mm With M5×51mm Battery Post With Trio REFERENCES..  71mm	261-170/MIP8001L FEATURES Diodes: 6-35 Ampere Mounting Length: 80mm With M5×43mm Battery Post With Trio With Aluminum Heat sinks REFERENCES.. MITSUBISHI A860T08270 CARGO 132130 MOBILETRON RM-65 TRANPO IMR8041 261-160/MIP8001 FEATURES Diodes: 6-35 Ampere With Copper Heat sinks  80mm
261-200/MIP8002L FEATURES Diodes: 6-35 Ampere Mounting Length: 80mm With M5×51mm Battery Post With Trio With metal With Aluminum Heat sinks 261-190/MIP8002 FEATURES Diodes: 6-35 Ampere With Copper Heat sinks  80mm	261-220/MIP8003L FEATURES Diodes: 6-35 Ampere Mounting Length: 80 mm With Trio With Aluminum Heat sinks For use on: Dodge Trucks, Mazda, Mitsubishi, Plymouth REFERENCES.. MITSUBISHI A860T06070 CARGO 131221 MOBILETRON RM-66 TRANPO IMR8043 261-210/MIP8003 FEATURES Diodes: 6-35 Ampere With Copper Heat sinks  80mm	260-K30 FEATURES Diodes: 6-35 Ampere With M6 Battery Post Mounting Length: 90mm With Trio/Capacitor REFERENCES.. OEM NO IYR9094 LESTER 13785 FIT UNIT AB170094 MOBILETRON RM-118 CARGO 231426  B+ 90mm
261-260/MIP8005L FEATURES Diodes: 6-35 Ampere Mounting Length: 80mm With Trio With Aluminum Heat sinks For use on: Nissan Vans, Nissan March REFERENCES.. MITSUBISHI A860T08470 CARGO 131543 MOBILETRON RM-85 TRANPO IMR8011 261-250/MIP8005 FEATURES Diodes: 6-35 Ampere  80mm	261-290/MIP8007L FEATURES Diodes: 6-35A Mounting Length: 80mm With M5×43mm Battery Post With Trio With Aluminum Heat sinks For use on: Mitsubishi Motors REFERENCES.. MITSUBISHI ME700555 A860T14570 CARGO 136726 MOBILETRON RM-86 TRANPO IMR8047 261-280/MIP8007 FEATURES Diodes: 6-35A With Copper Heat sinks  80mm	261-310/MIP8008L FEATURES Diodes: 6-35 Ampere Mounting Length: 80mm With M5×51mm Battery Post With Trio With Aluminum Heat sinks For use on: Dodge Trucks, Mitsubishi REFERENCES.. MITSUBISHI A860T08270 MD607616 CARGO 132130 MOBILETRON RM-65 TRANPO IMR8041 261-300/MIP8008 FEATURES Diodes: 6-35A With Copper Heat sinks  80mm






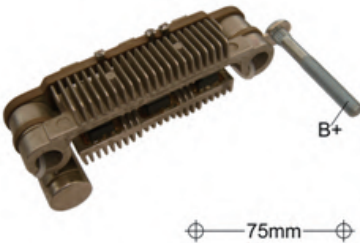

261-360/MIP8501 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With Trio With Copper Heat sinks For use on: Dodge, Mitsubishi, Mazda, Plymouth REFERENCES.. MITSUBISHI A860T03970 A860T05170 CARGO 130833 MOBILETRON RM-68 TRANSPO IMR8511  ⌀ 85mm ⌀	261-390/MIP8503 FEATURES Diodes: 6-35 Ampere Mounting Length: 85 mm With M5×43mm Battery Post With Trio With Copper Heat sinks For use on: Mitsubishi Mirage Turbo, Mazda Diesel 626 REFERENCES.. MITSUBISHI 2323004D00 A860T08770 CARGO 132463 MOBILETRON RM-73 TRANSPO IMR8545  ⌀ 85mm ⌀	261-400/MIP8504 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With Trio With Copper Heat Sinks For use on: Mazda GLC Sedan REFERENCES.. MITSUBISHI A002T23471 CARGO 131544 MOBILETRON RM-69 TRANSPO IMR8571  ⌀ 85mm ⌀
261-410/MIP8505 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×43mm Battery Post With Trio With Copper Heat sinks REFERENCES..  ⌀ 85mm ⌀	261-420/MIP8506 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×43mm Battery Post With Trio With Aluminum Heat Sinks REFERENCES.. MITSUBISHI JA1427IR  ⌀ 85mm ⌀	261-490 FEATURES Diodes: 6-35 Ampere Button Mounting Length: 71mm With Trio/Capacitor With Steel Heat Sink REFERENCES.. OEM NO REC-537 MOBILETRON RM-63 TRANSPO IMR7171 FIT UNIT A860T07170 CARGO 234559  ⌀ 71mm ⌀
261-520 FEATURES Diodes: 6-35 Ampere Mounting Length: 80mm With M5×51mm Battery Post With Trio/Capacitor With Aluminum Heat sinks REFERENCES.. LESTER 12308 FIT UNIT A002T72999  ⌀ 80mm ⌀	262-010/MIA11401 FEATURES Diodes: 12-35 Ampere Diameter OD: 122mm With M8×59.5mm Battery Post Without Trio Without Capacitor REFERENCES.. MITSUBISHI A86X93170 CARGO 330307 MOBILETRON RM-180HV TRANSPO IMR12200 LESTER 11231 	262-021 FEATURES Diodes: 12-50A Avalanche Mounting Length: 122mm With M6×28.5mm Battery Post Without Trio Without Capacitor REFERENCES.. LESTER 11168 WAI IMR12204 MOBILETRON RM-190HV  W B+




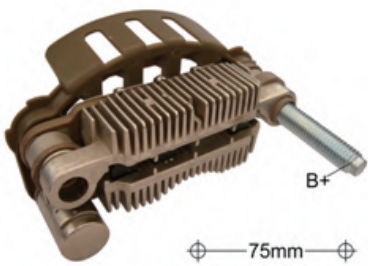
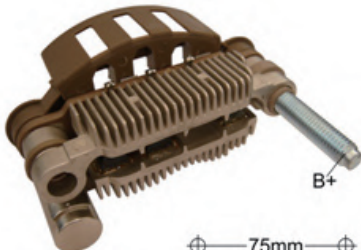

262-030/MIA11403A FEATURES Diodes:12-50A Avalanche Diameter OD:122mm With M6 L=28.5mm Battery Post REFERENCES.. LESTER 11272 11542 11688 14488 14489 MOBILETRON RM-178HD TRANSPO IMR12202 	262-040/MIA12101 FEATURES Diodes: 12-35 Ampere Diameter: 128mm With M5×44mm Battery Post REFERENCES.. 	262-060/MIA12102A FEATURES Diodes : 16-35 A Avalanche Diameter OD: 128mm With M8×59.5mm Battery Po REFERENCES.. LESTER A003TJ0691 A3TJ0691 11315 11316 MOBILETRON RM-194 VOLTAC AEM2805 
262-070/MIA12103A FEATURES Diodes: 16-35A Avalanche Diameter : 128mm With M5×44mm Battery Post REFERENCES.. MITSUBISHI A003TJ0781AE A003TJ0781ZE LESTER 20553 20553 MOBILETRON RM-168 	262-080/MIA12104A FEATURES Diodes:12-50A Avalanche Diameter:128mm With M6×28.5mm Battery Post Without Trio Without Capacitor REFERENCES.. LESTER A003TJ0891 A003TJ0991 TRANSPO IMR12800 	262-081 FEATURES Diodes: 12-50 Ampere Mounting Length: 128mm With M6×28.5mm Battery Post REFERENCES.. LESTER 11173 WAI IMR12800 MOBILETRON RM-208 FIT UNIT A3TJ0991ZC 
262-090/MIA12105G FEATURES Diodes:16-35A Avalanche Diameter OD:128mm With M8×59.5mm Battery Post REFERENCES.. MITSUBISHI 90679-A0436-9305H LESTER 11315 11316 MOBILETRON RM-192 TRANSPO IMR12806 	262-100/MIA12106A FEATURES Diodes: 12-50A Avalanche Diameter: 128mm With M8×59.5mm Battery Post REFERENCES.. LESTER 11228 11340 20776 MOBILETRON RM-199 TRANSPO IMR12808 	262-110/MIA12107A FEATURES Diodes:12-50A Avalanche Diameter:128mm With M6×28.5mm Battery Post REFERENCES.. MITSUBISHI A3TX0091 LESTER 11271 








262-120 FEATURES Diodes: 16-50 Ampere Diameter: 135mm With M6×41mm Battery Post REFERENCES.. MOBILETRON RM-189H TRANSPO IMR13500 	262-130 FEATURES Diodes: 12-35A Avalanche Diameter: 128mm With M8×59.5mm Battery Post REFERENCES.. TRANSPO IMR12802 	262-150 FEATURES Diodes: 12-50A Avalanche Diameter: 122mm With M8×59.5mm Battery Post REFERENCES.. MOBILETRON RM-203 
262-160 FEATURES Diodes: 12-35A Avalanche Diameter OD: 115mm With M6×28.5mm Battery Post REFERENCES.. OEM NO A4982 FIT UNIT A5TJ0191ZC AHGA81 	262-190 FEATURES Diodes:12-35A Avalanche Diameter OD :114mm With M6×28.5mm Battery Post REFERENCES.. mitsubishi A5TL0581ZD A5TL0581ZC LESTER 14488 14489 	262-200 FEATURES Diodes: 16-50 A Avalanche Diameter: 135mm With M8×59.5mm Battery Post REFERENCES.. MOBILETRON RM-200 
262-210 FEATURES Diodes: 12-50 Ampere Diameter: 128mm With M8×59.5mm Battery Post REFERENCES.. FIT UNIT JFZ1926L 	262-220 FEATURES Diodes: 12-35A Avalanche Diameter OD: 115mm With M6×60mm Battery Post REFERENCES.. mitsubishi A860XA9370 LESTER 11410 MOBILETRON RM-175 TRANSPO IMR11500 FIT UNIT A5TJ0091 OEM NO 7703-3146 	262-230 FEATURES Diodes:12-50A Avalanche Mounting Length:128mm With M6×28.5mm Battery Post REFERENCES.. OEM NO A004TX0091ZC LESTER 12878 FIT UNIT AA5T-10300-BA 









262-240 FEATURES Diodes: 12-60A Avalanche Diameter: 128mm With M6 L=28.5 Battery Post REFERENCES.. FIT UNIT A3TX0781 23700-AA660 	262-250 FEATURES Diodes:12-50A Avalanche Diameter OD:128mm With M8×59.5mm Battery Post REFERENCES.. LESTER 11413 11443 FIT UNIT A003TX0381 	262-260 FEATURES Diodes: 12-50A Avalanche Diameter OD: 122mm With M6×28.5mm Battery Postt REFERENCES.. OEM NO 15052-500 LESTER 14624 FIT UNIT A2TX9091 
262-280 FEATURES Diodes: 12-35A Avalanche Diameter:128mm With M5×44mm Battery Post REFERENCES.. FIT UNIT A3TJ0491 	265-011 FEATURES Diodes: 12-35A Avalanche Diameter: 112mm With M6×43.7mm Battery Post REFERENCES.. FIT UNIT A5TZ0291ZC 	265-020 FEATURES Diodes: 12-35A Avalanche Diameter: 112mm With M6×43.7mm Battery Post REFERENCES.. FIT UNIT A5TZ0391 
265-030 FEATURES Diodes:12-50A Avalanche Diameter OD:128mm With M8×53mm Battery Post REFERENCES.. 	265-040 FEATURES Diodes:12-50A Avalanche Diameter OD:128mm With M6×17mm Battery Post REFERENCES.. FIT UNIT A003TV1391ZC 	262-250 FEATURES Diodes:12-50A Avalanche Diameter OD:128mm With M8×59.5mm Battery Post REFERENCES.. LESTER 11413 11443 FIT UNIT A003TX0381 



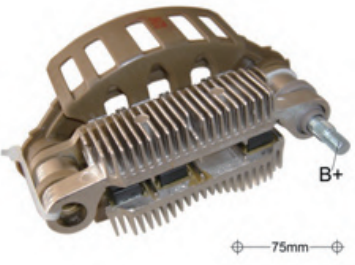



265-080 FEATURES Diodes:12-35A Avalanche Diameter OD:112mm With M8×53mm Battery Post REFERENCES.. FIT UNIT A005TV0981ZC 68324893AA 	265-090 FEATURES Diodes:12-50A Avalanche Diameter OD:120mm With M6×17mm Battery Post REFERENCES.. FIT UNIT A2TV1281ZD 	265-100 FEATURES Diodes:12-35A Avalanche Diameter OD:112mm With M6×17mm Battery Post REFERENCES.. MITSUBISHI A5TV0591 FIT UNIT JFZ1922Z 
265-120 FEATURES Diodes:12-50A Avalanche Diameter OD:120mm With M8×53mm Battery Post REFERENCES.. FIT UNIT A002TV0181ZC 	265-130 FEATURES Diodes:6-50A Avalanche Diameter OD:112mm With M8×53mm Battery Post REFERENCES.. FIT UNIT A5TE0181 	265-140 FEATURES Diodes:6-50A Avalanche Diameter OD:112mm With M6×17mm Battery Post REFERENCES.. FIT UNIT A5TE0081 
265-150 FEATURES Diodes:12-50A Avalanche Diameter OD:128mm With M6×17mm Battery Post REFERENCES.. FIT UNIT A003TV4591 A003TV2391 	265-160 FEATURES Diodes:12-50A Avalanche Diameter OD:128mm With M8×53mm Battery Post REFERENCES.. MITSUBISHI UNIT A3TV2781ZC FORD UNIT L1MT-10300-CB L1MZ-10346-A 	265-170 FEATURES Diodes: 6-60A Avalanche Diameter OD: 120mm With M6×17mm Battery Post REFERENCES.. MITSUBISHI A002TE0381 LESTER 11894 


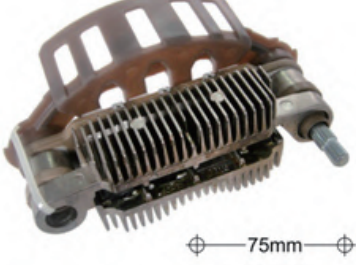
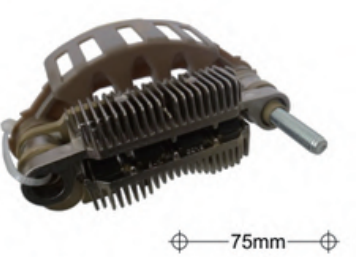
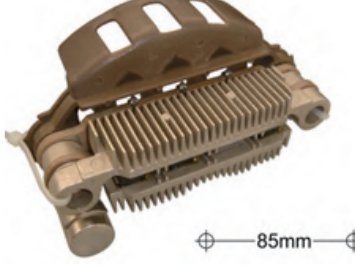

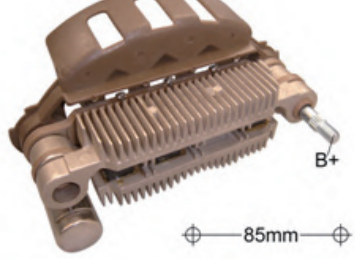
260-A30/MIA7501 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×49mm Battery Post With Trio REFERENCES.. mitsubishi A860T17570 A860T17970 CARGO 132040 TRANSPo IMR7544 MOBILETRON RM-08 	260-A40/MIA7502 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post With Trio REFERENCES.. mitsubishi A002T04474 A002T13571 CARGO 132040 TRANSPo IMR7546 LESTER 14903 14910 	260-A50/MIA7503 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With Trio For use on: Chrysler Laser, Ford, Mitsubishi Starion REFERENCES.. mitsubishi A860T17770 A860T17779 CARGO 133265 TRANSPo IMR7550 MOBILETRON RM-11 
260-A60/MIA7504 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio For use on: Mazda 626, MX-6, Ford Probe, Hyundai, Dodge REFERENCES.. mitsubishi A860T27170 CARGO 132469 TRANSPo IMR7556 MOBILETRON RM-10HV 	260-A70/MIA7505 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio For use on: Suzuki Sidekick, Geo Tracker REFERENCES.. mitsubishi A860T30370 CARGO 135215 TRANSPo IMR7558 MOBILETRON RM-22 	260-A90/MIA7506 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post With Trio For use on: Geo Tracker, Suzuki Sidekick REFERENCES.. mitsubishi A860T32570 CARGO 134027 TRANSPo IMR7562 MOBILETRON RM-23 
260-AA0/MIA7507 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×47.5mm Battery Post With Trio For use on: Mitsubishi Galant, Mirage, Pajero REFERENCES.. mitsubishi A860T22370 MD611479 CARGO 132468 TRANSPo IMR7564 MOBILETRON RM-20HV 	260-AB0/MIA7508 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×47.5mm Battery Post With Trio For use on: Mitsubishi Mirage Diesel REFERENCES.. mitsubishi A860T19370 MD611501 CARGO 135228 TRANSPo IMR7568 MOBILETRON RM-18 	260-AC0/MIA7509 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×49mm Battery Post With Trio For use on: Mitsubishi Mirage 1.5L, Dodge Colt REFERENCES.. mitsubishi A860T24570 CARGO 135248 TRANSPo IMR7570 MOBILETRON RM-19 

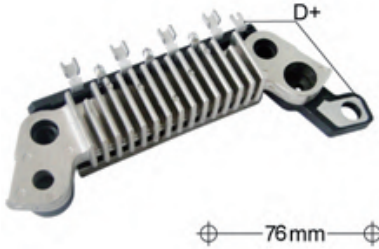
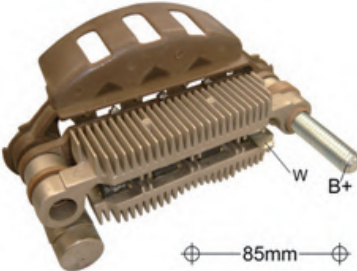
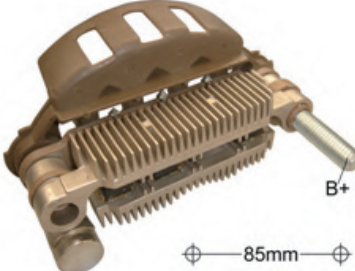
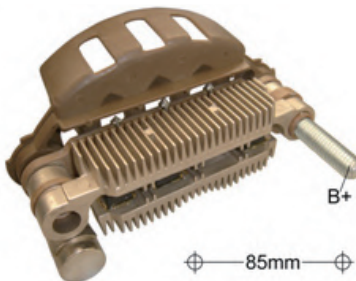




260-AD0/MIA7510 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post With Trio For use on: Mazda 323 REFERENCES.. MOBILETRON RM-16 CARGO 135247 TRANSPO A860T27070 MOBILETRON 14905 	260-AE0/MIA7512 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With Trio For use on: Honda Civic, Del Sol REFERENCES.. MITSUBISHI A5T04292 A860T38570 CARGO 232606 TRANSPO IMR7584 MOBILETRON RM-27 	260-AF0/MIA7513 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio For use: Mazda 929 REFERENCES.. MITSUBISHI A860T20070 A860T23570 CARGO 136733 TRANSPO IMR7586 MOBILETRON RM-24 
260-AG0/MIA7514 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio For use on: Peugeot REFERENCES.. MITSUBISHI 1901-0002 TRANSPO IMR7596 	260-AH0/MIA7515 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio REFERENCES.. 	260-AI0/MIA7516 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M8×59.5mm Battery Post With Trio For use on: 1993-94 Mazda Mitsubishi REFERENCES.. MITSUBISHI A860T46570 MD61884 CARGO 235890 TRANSPO IMR7588 MOBILETRON RM-124 
260-AK0/MIA7517 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With Trio For use on: Mitsubishi, Plymouth, Dodge Truck REFERENCES.. MITSUBISHI A860T13170 MD607917 CARGO 132466 TRANSPO IMR7542 MOBILETRON RM-07 	260-AL0/MIA7518 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M8×59.5mm Battery Post With Trio REFERENCES.. VOLTAC AEM7588 UTM NO EM7588A 	260-AM0/MIA7519 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio REFERENCES.. 

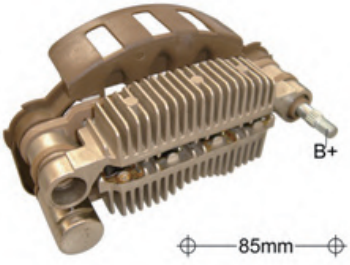



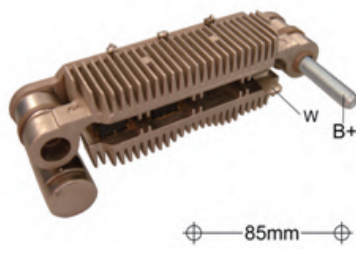
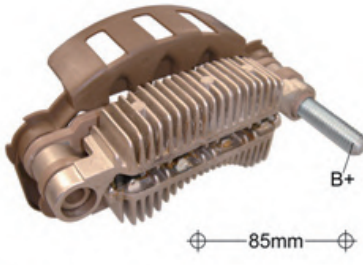
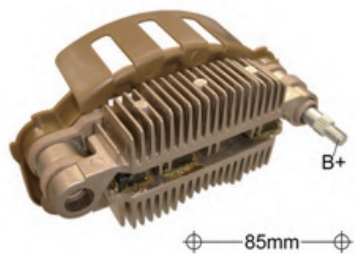

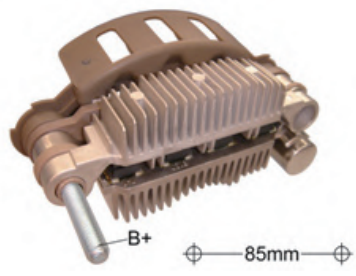
260-AN0/MIA7520 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×47.5mm Battery Post With Trio REFERENCES.. FIT UNIT 4D55 CARGO 139763 VOLTAG AEM9763 	260-AP0/MIA7521 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio REFERENCES.. MITSUBISHI 96314258 AB165104 	260-AQ0/MIA7523 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With Trio For use on: Nissan 200SX, Pulsar, Maxima, Stanza REFERENCES.. MITSUBISHI A860T17270 CARGO 132467 TRANSP0 IMR7548 MOBILETRON RM-09 
260-AR0/MIA7524 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post With Trio For use on: Nissan, Mazda323, Mazda MX, Mercury Tracer REFERENCES.. MITSUBISHI A860T20270 A860X20299 CARGO 132792 TRANSP0 IMR7552 MOBILETRON RM-12 NISSAN UNIT 2312458L10 	260-AS0/MIA7525 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio For use on: Nissan 300ZXr REFERENCES.. MITSUBISHI A860T16470 CARGO 133539 TRANSP0 IMR7554 MOBILETRON RM-17 NISSAN UNIT 2312442L71 	260-AT0/MIA7526 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio For use on: Nissan Pulsar REFERENCES.. MITSUBISHI A860T27270 A860X27299 CARGO 134295 TRANSP0 IMR7560 MOBILETRON RM-14 
260-AU0/MIA7527 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post With Trio For use on: Mitsubishi 50-70 Amp IR/IF Alternators REFERENCES.. MITSUBISHI A860T39770 CARGO 139195 TRANSP0 IMR7582 MOBILETRON RM-22 	260-AV0/MIA7529 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post Without Trio Without Capacitor REFERENCES.. MITSUBISHI A860X83370 CARGO 235297 TRANSP0 IMR7579 MOBILETRON RM-136 	260-AW0/MIA7530 FEATURES Diodes: 8-35A Avalanche Mounting Length: 75mm With M5×44mm Battery Post Without Trio REFERENCES.. MITSUBISHI A005TA6392C CARGO 235526 LESTER 23168 FIT UNIT CA166511R 


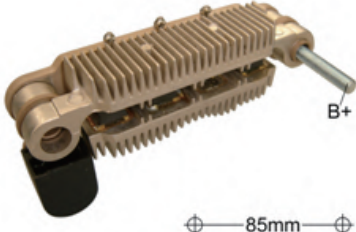
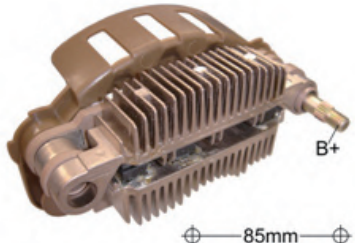

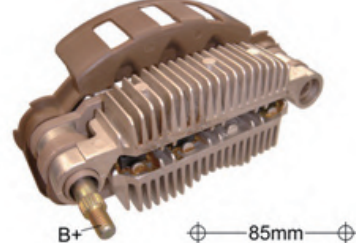
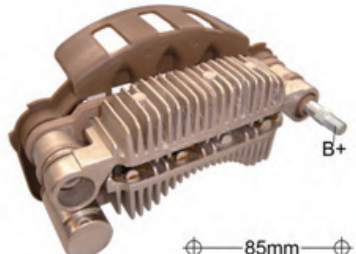

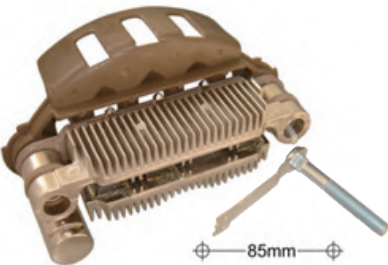
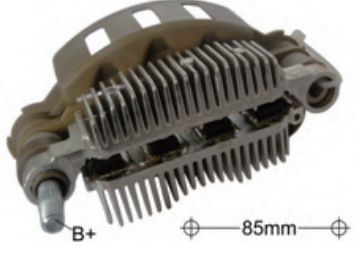
260-AX0/MIA7531 FEATURES Diodes: 6-35A Avalanche Mounting Length: 75mm With M5×44mm Battery Post Without Trio REFERENCES.. mitsubishi A001TA3392C CARGO 236741 LESTER 22927 FIT UNIT CA11832IR 	260-AY0/MIA7532 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post With Trio REFERENCES.. mitsubishi A860T34170 A860T37770 TRANSPO IMR7580 LESTER 13227 13432 13700 HONDA UNIT 31100-P05-C02 AHGA18 	260-AZ0/MIA7533 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post Without Trio REFERENCES.. mitsubishi A005TA4291 TRANSPO IMR7581 MOBILETRON RM-145 
260-B10/MIA7535 FEATURES Diodes: 6-35A Avalanche Mounting Length: 75mm With M5×44mm Battery Post Without Trio REFERENCES.. mitsubishi 1901-0021 	260-B20/MIA7536 FEATURES Diodes: 6-35A Avalanche Mounting Length: 75mm With M5×44mm Battery Post Without Trio Without Capacitor REFERENCES.. mitsubishi A001TA3391 A001TA3391C CARGO 235527 LESTER 20164 20574 21664 22926 MOBILETRON RM-202 	260-B30/MIA7537 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post Without Trio Without Capacitor REFERENCES.. mitsubishi A5TA7091 VOLTAG AEM7579 
260-B40/MIA7522 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post With Trio For use on: Honda Civic REFERENCES.. mitsubishi A866X45281 A5T06391 TRANSPO IMR7576 MOBILETRON RM-28 	260-B50/MIA7538 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post Without Trio Without Capacitor REFERENCES.. mitsubishi A005TB0091 A005TB1391 CARGO 238492 LESTER 13893 MOBILETRON RM-158H TRANSPO IMR7589 	260-B70/MIA7540 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post Without Capacitor Without Trio REFERENCES.. 





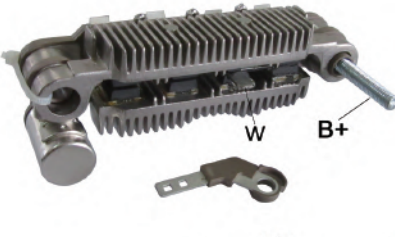
260-B80/MIA7542 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post With Trio With Capacitor REFERENCES.. mitsubishi 1901-0005 TRANSPO IMR7590 MOBILETRON RM-129 	260-B81/MIA7552 FEATURES Diodes: 8-35A Avalanche Mounting Length: 75mm With M5×41mm Battery Post Without Trio Without Capacitor REFERENCES.. 	260-B90/MIA7543 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post Without Trio Without Capacitor REFERENCES.. 
260-BA0/MIA7544 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×41mm Battery Post Without Trio Without Capacitor REFERENCES.. mitsubishi A005TA7692 CARGO 114129 LESTER 22172 AS ARC5168 VOLTAG AEM5816 	260-BB0/MIA7545 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post Without Trio Without Capacitor REFERENCES.. mitsubishi A860X70970 CARGO 235892 TRANSPO IMR75816 MOBILETRON RM-129A 	260-BC0/MIA7541 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M5×41mm Battery Post Without Capacitor Without Trio REFERENCES.. 
260-BD0/MIA7546 FEATURES Diodes: 8-35A Avalanche Mounting Length: 75mm With M5×44mm Battery Post Without Trio Without Capacitor REFERENCES.. 	260-BG0/MIA7549 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M5×49mm Battery Post With Trio With Capacitor REFERENCES.. 	260-BH0/MIA7550 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post Without Trio Without Capacitor REFERENCES.. FIT UNIT JA1181IR 

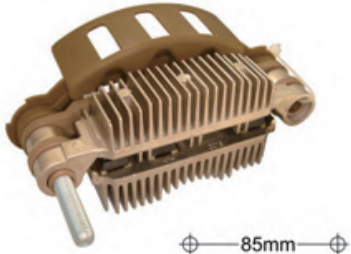






260-BI0/MIA7553 FEATURES Diodes: 6-35 Ampere Diameter OD: 75mm With M5×44mm Battery Post With Trio/Capacitor REFERENCES.. MITSUBISHI A860T34170 A860T37770 TRANPO IMR7580 LESTER 13227 13432 13700 AS ARC5095  75mm	260-BK0/MIA7555 FEATURES Diodes: 6-35 Ampere Mounting Length: 75mm With M5×41mm Battery Post Without Trio REFERENCES..  75mm	260-BN0/MIA7557 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M5×44mm Battery Post With Trio/Capacitor REFERENCES.. UTM NO EM7576A EM7576B ZAUFER 312N10530Z VOLTAG AEM7576  75mm
260-BQ0/MIA7559 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post Without Trio/Capacitor REFERENCES.. MITSUBISHI A860X83370 CARGO 235297 TRANPO IMR7579 MOBILETRON RM-136 LESTER 13893  75mm	260-BR0/MIA7560 FEATURES Diodes: 8-35 Ampere Mounting Length: 75mm With M6×49.5mm Battery Post Without Trio/Capacitor REFERENCES.. LESTER 13251  75mm	260-BX0/MIA8501 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With Trio For use on: Ford Tempo, Taurus, Mercury Topaz, Sable REFERENCES.. MITSUBISHI A860T28670 CARGO 134297 TRANPO IMR8540 MOBILETRON RM-29  85mm
260-BY0/MIA8502 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With Trio For use on: Ford Thunderbird REFERENCES.. MITSUBISHI E8PZ10304A CARGO 233511 TRANPO IMR8542 MOBILETRON RM-30 260-C90/MIA8512 FEATURES Diodes: 8-35 Ampere REFERENCES.. CARGO 230593 TRANPO IMR85104 LESTER 21173  B+ 85mm	260-BZ0/MIA8503 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With Trio For use on: Mazda MPV REFERENCES.. MITSUBISHI A860T23170 A860T31370 FORD NO F02Z-10304-A F0JY-10304-A MANDO NO A600C3201 260-C80/MIA8511 FEATURES Diodes: 8-35 Ampere REFERENCES.. MITSUBISHI A860T23270 CARGO 135042 TRANPO IMR8574  B+ 85mm	260-C10/MIA8505 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post With Trio For use on: Ford Escort, Mazda 323 REFERENCES.. MITSUBISHI A860T38270 B36618W60A CARGO 136977 TRANPO IMR8548 MOBILETRON RM-38  B+ 85mm


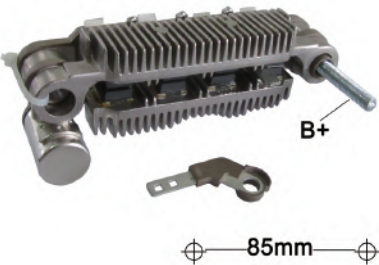
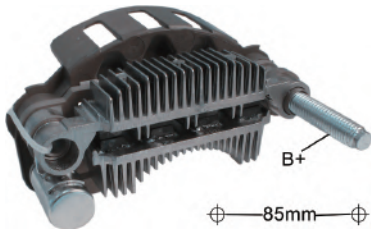
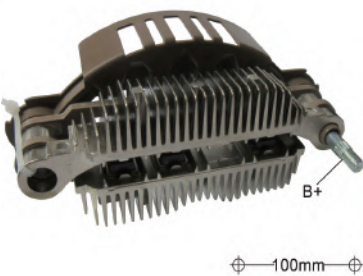
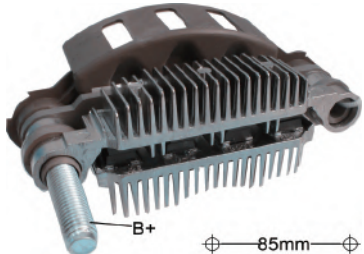
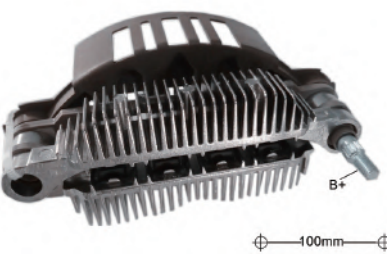

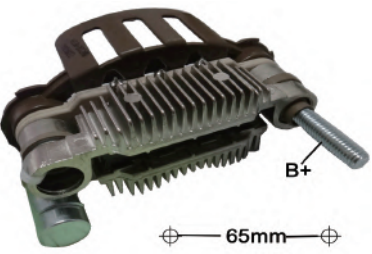

260-C20/MIA7601 FEATURES Diodes: 8-35 Ampere Mounting Length: 76mm With Trio REFERENCES.. mitsubishi 6008253160 03500-0402 LESTER 12259 	260-C30/MIA8506 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M8×54mm Battery Post With Trio REFERENCES.. 	260-C40/MIA8507 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M8×54mm Battery Post With Trio For use on: Mazda 626, MX6 REFERENCES.. CARGO 137861 TRANSPON IMR8580 MOBILETRON RM-37 
260-C50/MIA8508 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M8×54mm Battery Post With Trio For use on: Mazda 626, MX6 REFERENCES.. mitsubishi A860T32170 CARGO 232628 TRANSPON IMR8582 MOBILETRON RM-57 	260-C60/MIA8509 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post Without Trio For use on: Subaru XT REFERENCES.. LESTER 11399 19710 135249 260-C70/MIA8510 FEATURES Diodes: 8-35 Ampere With Trio REFERENCES.. CARGO 135249 MOBILETRON RM-33 TRANSPON IMR8572 	260-CA0/MIA8513 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With Trio For use on: Subaru XT REFERENCES.. mitsubishi A2T14591 A2T28792 
260-CB0/MIA8514 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M8×54mm Battery Post Without Capacitor Without Trio REFERENCES.. mitsubishi A860T57870 CARGO 138873 TRANSPON IMR8566 MOBILETRON RM-110HV LESTER 13718 260-CR0/MIA8530 FEATURES Diodes: 8-35 Ampere REFERENCES.. TRANSPON IMR85668 	260-JZ0 FEATURES Diodes: 8-35A Avalanche Mounting Length: 85mm With M6×49.5mm Battery Post With Capacitor REFERENCES.. FIT UNIT A2TC1877 	260-CD0/MIA8516 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With Trio REFERENCES.. mitsubishi A860T38770, MD618568 CQ NO CQ1080349 GAUSS NO GA1385 UNIPOINT REC565 260-D80/MIA8547 FEATURES Diodes: 8-35 Ampere 

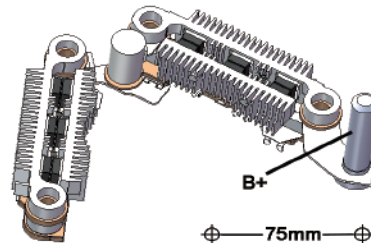
260-CF0/MIA8518 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post With Trio For use on: Mazda 626 REFERENCES.. mitsubishi A860T38970 CARGO 135948 TRANSPON IMR85100 MOBILETRON RM-58 	260-CG0/MIA8519 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post Without Capacitor REFERENCES.. LESTER 13889 CARGO 230660 333819 TRANSPON IMR8599 MOBILETRON RM-115 RM-185 	260-CJ0/MIA8521 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M8×54mm Battery Post With Trio With Capacitor 260-CM0/MIA8525 FEATURES Diodes: 6-35 Ampere REFERENCES.. FIT UNIT JA1183IR 
260-CN0/MIA8526 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×49mm Battery Post With "W" Terminal With Trio With Capacitor REFERENCES.. mitsubishi A860T41670 A860X60670 CARGO 136552 MOBILETRON RM-97HV 260-CI0/MIA8520 FEATURES Diodes: 6-35 Ampere Without "W" Terminal 	260-CP0/MIA8528 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With "W" Terminal With Trio REFERENCES.. 	260-CQ0/MIA8529 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M8×54mm Battery Post With Trio Without Capacitor REFERENCES.. 
260-CS0/MIA8531 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post Without Trio/Capacitor REFERENCES.. mitsubishi A860X61970 TRANSPON IMR8567 MOBILETRON RM-130 	260-CT0/MIA8532 FEATURES Diodes: 6-35 A Avalanche Mounting Length: 85mm With M5×44mm Battery Post Without Trio REFERENCES.. 	260-CU0/MIA8533 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post Without Trio For use on: Avenger, Cirrus, Neon, Sebring 260-CY0/MIA8537 FEATURES Diodes: 6-35 Ampere With M6×60mm Battery Post REFERENCES.. TRANSPON IMR8596 

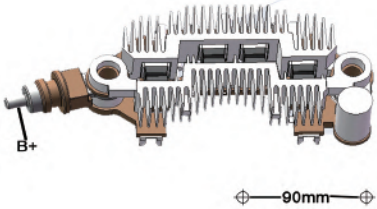
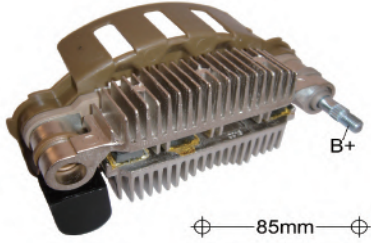
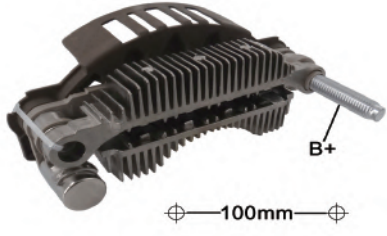
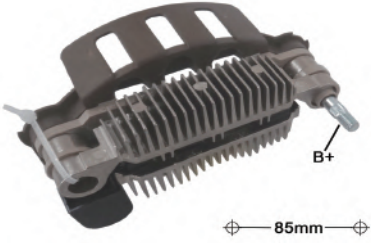
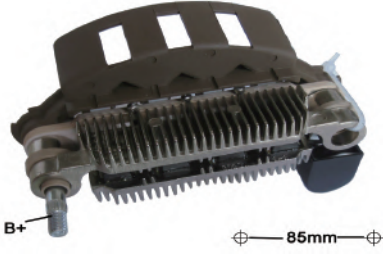
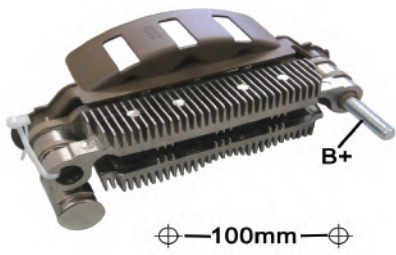
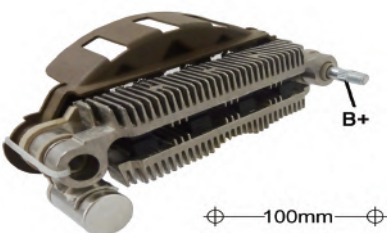
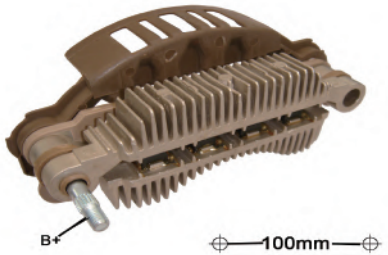
260-CV0/MIA8534 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post With Trio For use on: Ford, Mazda REFERENCES.. MITSUBISHI A860T39170 CARGO 136978 TRANSPO IMR8592 MOBILETRON RM-39 	260-CW0/MIA8535 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×49mm Battery Post With Trio For use on: Mitsubishi REFERENCES.. MITSUBISHI A860T29370 TRANSPO IMR8578 	260-CX0/MIA8536 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M6×43.5mm Battery Post Without Trio/Capacitor REFERENCES.. MITSUBISHI A2TB2991 TRANSPO IMR8595 MOBILETRON RM-135 
260-CZ0/MIA8538 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With Trio REFERENCES.. MITSUBISHI A860T39270 LESTER 13478 TRANSPO IMR8598 NISSAN UNIT 23100-0P513 23100-0P515 	260-D00/MIA8539 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post Without Trio Without Capacitor REFERENCES.. MOBILETRON RM-112HV CARGO 234814 	260-D10/MIA8540 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post With Trio REFERENCES.. MITSUBISHI A860T41070 CARGO 234647 VOLTAG AEM4647 
260-D20/MIA8541 FEATURES Diodes: 8-35A Avalanche Mounting Length: 85mm With M5×44mm Battery Post Without Trio Without Capacitor REFERENCES.. 	260-D30/MIA8542 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M6×47.5mm Battery Post With Trio With Capacitor REFERENCES.. 	260-D41/MIA8565 FEATURES Diodes: 8-35A Ampere Mounting Length: 85mm With M6×43.5mm Battery Post Without Trio Without Capacitor REFERENCES.. MITSUBISHI A860X45170 CARGO 139197 TRANSPO IMR8575 

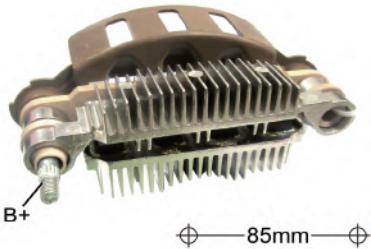
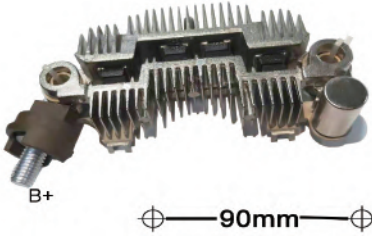
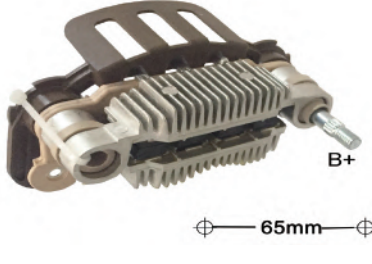
260-DH0/MIA8556 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With Trio With Capacitor REFERENCES..  85mm	260-DJ0/MIA8552 FEATURES Diodes: 8-35A Ampere Mounting Length: 85mm With M6×60mm Battery Post Without Trio With Capacitor REFERENCES.. MITSUBISHI A002T81192 A002T81192ZC CARGO 138893 LESTER 13575 MOBILETRON RM-53HV TRANPO IMR8597  85mm	260-K20 FEATURES Diodes : 8-35A Avalanche Mounting Length :100mm With M8×54mm Battery Post Without Trio Without Capacitor 28V generator REFERENCES.. FIT UNIT A004TR7291  100mm
260-DL0/MIA8558 FEATURES Diodes: 6-35Ampere Mounting Length: 85mm With M8×54mm Battery Post With Trio REFERENCES.. MITSUBISHI A002TA8891 CARGO GA1340  85mm	260-DP0/MIA8564 FEATURES Diodes: 6-35A Ampere Mounting Length: 85mm With M6×60mm Battery Post Without Trio Without Capacitor REFERENCES..  85mm	260-DQ0/MIA8567 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With Trio/Capacitor 260-DR0/MIA8568 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post  85mm
260-DS0/MIA8569 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With Trio/Capacitor REFERENCES.. MITSUBISHI A4TU3599 LESTER 20111  85mm	260-DV0/MIA8572 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M6×49.5mm Battery Post With "W" Terminal With Trio/Capacitor REFERENCES.. MITSUBISHI A860X81370 LESTER 11989 11990 12744 TRANPO IMR85113 260-DW0/MIA8574 FEATURES With M5×44mm Battery Post  85mm	260-DV1 FEATURES Diodes:8-35A Ampere Diameter:85mm With M6×49.5mm Battery Post With "W" Terminal With Trio/Capacitor REFERENCES.. LESTER 11989 11990 12744 TRANPO IMR85113 MITSUBISHI A860X81370  85mm





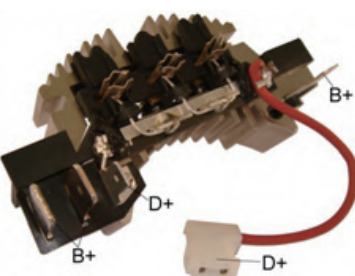
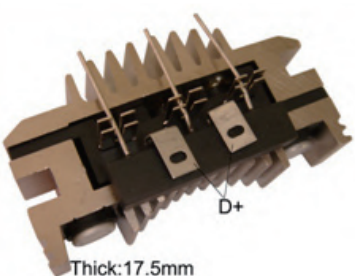
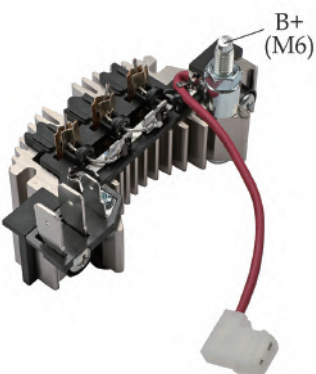

260-DW2 FEATURES Diodes : 8-35 Ampere Mounting Length : 85mm With M5×44mm Battery Post With Trio /Capacitor REFERENCES.. 	260-DX0/MIA8575 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M8×59.5mm Battery Post With "W" Terminal With Trio/Capacitor REFERENCES.. 	260-DZ0/MIA8571 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M6×60mm Battery Post REFERENCES.. mitsubishi A002TB1491 LESTER 13735 MOBILETRON RM-126 WAI/TRANPO IMR8568 
260-E10/MIA8570A FEATURES Diodes: 6-30A Avalanche Mounting Length: 85mm With M5×44mm Battery Post REFERENCES.. mitsubishi A2TG1081ZT LESTER 20370 VOLTAG AEM0161 NISSAN 23100-2NAOA-1 	260-E40/MIA9001 FEATURES Diodes: 6-35 A Avalanche Mounting Length: 90mm With M8×45.6mm Battery Post With Trio REFERENCES.. mitsubishi A860X85970 TRANPO IYR9028 MOBILETRON RM-132 260-E50/MIA9002 FEATURES Diodes: 8-35A Avalanche REFERENCES.. TRANPO IYR9028 MOBILETRON RM-151 260-E52/MIA9008 FEATURES Diodes:8-35 Ampere With Trio/Capacitor 	260-E60/MIA8581A FEATURES Diodes OD: 6-35A Avalanche Diameter: 85mm With M8×54mm Battery Post Without Trio/Capacitor REFERENCES.. LESTER 11413 TRANPO IMR8589 
260-EA0/MIA8527 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With M5×44mm Battery Post Without Trio/Capacitor REFERENCES.. 	260-EZ1 FEATURES Diodes: 8-35A Avalanche Mounting Length: 65mm With M8×54mm Battery Post With Trio /Capacitor REFERENCES.. FIT UNIT A7TA3977/A7TA3977 	260-FP0 FEATURES Diodes: 8-40A Avalanche Mounting Length: 85mm With M5×44mm Battery Post With Trio/Capacitor R18 REFERENCES.. LESTER 11578 MOBILETRON RM-226HV FIT UNIT A002TG1391 A2TG1391ZD 

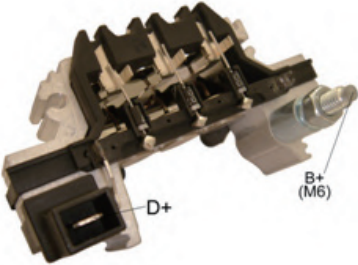
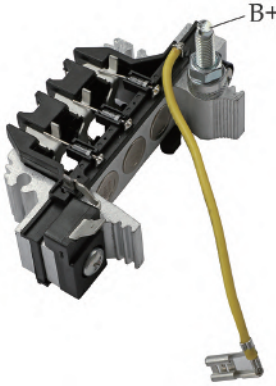

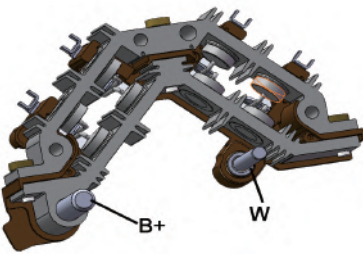
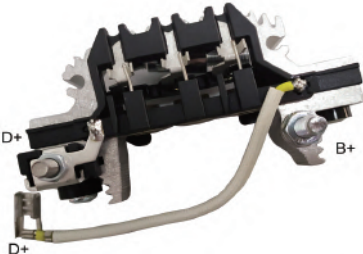


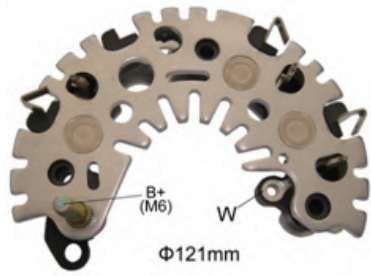
260-FS0 FEATURES Diodes: 8-35 Ampere Mounting Length: 65mm With M8×54mm Battery Post Without Trio With Capacitor REFERENCES.. MITSUBISHI A860X85470 LESTER 12566N FIT UNIT A007TA3377 23100-FU41A MOBILETRON RM-240 	260-FT0 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M5×49mm Battery Post With Trio/ Capacitor REFERENCES.. FIT UNIT A3TU3599 	260-G30 FEATURES Diodes: 8-35 Ampere Mounting Length: 85mm With M8×59.5mm Battery Post With Trio/ Capacitor REFERENCES.. LESTER 12634 FIT UNIT A003T05499 MD111932 
260-G50 FEATURES Diodes: 6-30 Ampere Mounting Length : 100mm With M5×44mm Battery Post Without Trio /Capacitor REFERENCES.. WAI/TRANPO IMR10049 	260-G90 FEATURES Diodes: 8-35A Avalanche Mounting Length: 85mm With M5×54mm Battery Post Without Trio/Capacitor REFERENCES.. LESTER 23856 FIT UNIT A2TG0281 MOBILETRON RM-159 	260-GA0 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With M5×44mm Battery Post Without Trio /Capacitor REFERENCES.. LESTER 11274 FIT UNIT A003TG5591 
260-GB0 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With M6×43.5mm Battery Post Without Trio /Capacitor REFERENCES.. MITSUBISHI K0043358 A860X79470 LESTER 23917 CARGO 235888 TRANPO IMR10091 MOBILETRON RM-127 FIT UNIT A003TG2681 23100-EB310 23100-EB31A 	260-GG0 FEATURES Diodes: 8-35 Ampere Diameter OD: 65mm With M6×49.5mm Battery Post With Capacitor/Trio REFERENCES.. LESTER 12799 FIT UNIT A7TA1472 	260-GH0 FEATURES Diodes: 8-35A Avalanche Mounting Length: 100mm With M8×54mm Battery Post With Capacitor With Trio REFERENCES.. LESTER 23791 TRANPO IMR10092 FIT UNIT 37300-4A113 AF111393 TA000A62401 



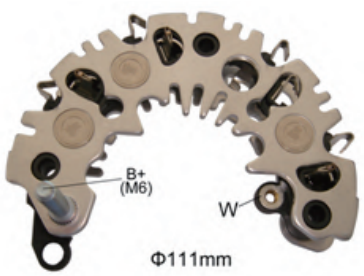


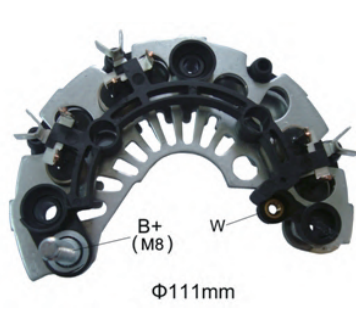

260-GP0/260-GR0 FEATURES Diodes: 8-35A Avalanche Mounting Length: 100mm Without Trio/Capacitor 260-GP0 With Capacitor REFERENCES.. FIT UNIT A9TU6499 	260-GP1/260-GR1 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm Without Trio With Capacitor REFERENCES.. FIT UNIT A9TU6499 	260-GQ0 FEATURES Diodes: 16-35 Ampere Mounting Length: 100mm Without Trio With Capacitor REFERENCES.. FIT UNIT A9TU5682 
260-GU0 FEATURES Diodes:16-35A Avalanche With M10-1.25×54mm Battey Post Mounting Length:100mm With Trio /Capacitor For 24V Alternators REFERENCES.. OEM NO ME301226 FIT UNIT A9TU5078 ME301226 	260-GU1 FEATURES Diodes: 16-35 Ampere With M10-1.25×54mm Mounting Length: 100mm With Trio/Capacitor REFERENCES.. OEM NO ME301226 FIT UNIT A9TU5078 	260-GV0 FEATURES Diodes: 6-35 Ampere Mounting Length: 85mm With Trio/Capacitor REFERENCES.. LESTER 13230 13298 TRANSPO IMR8570 FIT UNIT A003T00491 A003T00491MA E9DF-10300-BB E9DZ-10346-A 
260-H40 FEATURES Diodes: 16-35 Ampere Mounting Length: 100mm Without Trio With Capacitor With M10-1.25×54mm Battery Post REC 1260GP00+REC 1260GR00 REFERENCES.. LESTER 20257 FIT UNIT A9TU5591 	260-H41 FEATURES Diodes:16-35 Ampere Mounting Length:100mm Without Trio With Capacitor With M10-1.25×54mm Battery Post REC 1260GP10+REC 1260GR10 REFERENCES.. LESTER 20257 FIT UNIT A9TU5591 	260-J50 FEATURES Diodes:12-35 Ampere With M10×53mm Battery Post Mounting Length:75mm With Trio/Capacitor REFERENCES.. CARGO 112501 113343 

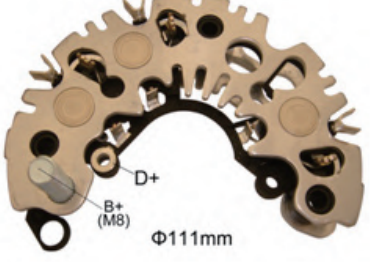
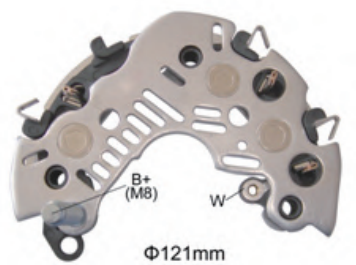






260-J60 FEATURES Diodes:8-35 Ampere With M5 Battery Post Mounting Length:90mm With Trio/Capacitor REFERENCES.. 	260-J70 FEATURES Diodes:6-35 Ampere Mounting Length:85mm With M5×44mm Battery Post Without Trio With Capacitor REFERENCES.. CARGO 112031 LESTER 13479 FIT UNIT A2TA7591 AMT0043 	260-JA0 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With M8×59.5mm Battery Post With Capacitor REFERENCES.. FIT UNIT A3TN539950-35A 
260-JB0 FEATURES Diodes:6-35 Ampere Diameter OD:85mm With M5×44mm Battery Post With Capacitor Without Trio REFERENCES.. 	260-JC0 FEATURES Diodes:8-35 Ampere Diameter OD:85mm With M5×44mm Battery Post With Capacitor/Trio REFERENCES.. CARGO 135260 LESTER 13286 13549 21340 WAI IMR8576 FIT UNIT A860T29970 A860T29999 	260-JG0 FEATURES Diodes: 6-35 Ampere Mounting Length: 100mm With M8×54mm Battery Post With Trio/Capacitor REFERENCES.. LESTER 12664 FIT UNIT A2TN-0399 A002TN0399 VALEO 437147 
260-JH0 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With M6×44.5mm Battery Post With Trio With Capacitor REFERENCES.. CARGO 114766 LESTER 20218 FIT UNIT 37300-4Z400 	260-JJ0 FEATURES Diodes: 8-35 Ampere Mounting Length: 100mm With M5×44mm Battery Post With Trio/Capacitor REFERENCES.. LESTER 23150 FIT UNIT AF185452 	260-JL0 FEATURES Diodes: 8-35A Avalanche Mounting Length: 100mm With M5×44mm Battery Post Without Trio/Capacitor REFERENCES.. CARGO 234310 LESTER 23311 WAI IMR10052 FIT UNIT SG12S077 SG12S113 




260-JR0	260-JV0	260-JY0
FEATURES Diodes: 8-35A Avalanche Mounting Length: 85mm With M5×44mm Battery Post Without Trio/Capacitor REFERENCES.. OEM NO 330593 LESTER 11176 WAI IMR8579 MOBILETRON RM-181 FIT UNIT A2TC1391 A2TC1391ZC A2TC1391ZE  B+ $\varnothing$ 85mm $\varnothing$	FEATURES Diodes:8-35 Ampere With M8 Battery Post Mounting Length:90mm With Trio/Capacitor REFERENCES.. FIT UNIT 0K87T-18300A AB250474  B+ $\varnothing$ 90mm $\varnothing$	FEATURES Diodes: 8-35 Avalanche Mounting Length: 65mm With M5×44mm Battery Post Without Trio/Capacitor REFERENCES.. FIT UNIT 31127-RV4-J01  B+ $\varnothing$ 65mm $\varnothing$

270-010/MG6901 FEATURES Diodes:6-25 Ampere Button With M6×45mm Batter Post With Trio Thick:19.5mm For use on:Fiat REFERENCES.. MAGNETI MARELLI 4808510 4808513 CARGO 131505 MOBILETRON RI-02 TRANSPO IXR693  Thick : 19.5mm	270-020/MG6902 FEATURES Diodes:6-25 Ampere Button With M6×45mm Battery Post With Trio Thick:17.5mm REFERENCES.. MAGNETI MARELLI 63621501 21222124 CARGO 131391 TRANSPO IXR692  Thick : 17.5mm	270-030/MG6903 FEATURES Diodes:6-25 Ampere Button With (M8+M5)×50.5mm Battery Post With Trio Thick:17.5mm REFERENCES.. MAGNETI MARELLI 063622901010 63622901 CARGO 139218 TRANSPO IXR704 12700310/MG6903-1 FEATURES Diodes:6-35 Ampere Button  Thick : 17.5 mm
270-040/MG6905 FEATURES Diodes:6-35 Ampere Button With Trio Thick:17.5mm REFERENCES.. MAGNETI MARELLI 64826040 64878691 CARGO 130650 MOBILETRON RI-01 TRANSPO IXR691  Thick:17.5mm	270-050/MG6906 FEATURES Diodes:6-35 Ampere Button Without Trio Thick:17.5mm REFERENCES.. MAGNETI MARELLI 690971 CARGO 130634 MOBILETRON RU-01 TRANSPO IDR197  Thick:17.5mm	270-060/MG6907 FEATURES Diodes:6-25 Ampere Button With Trio REFERENCES.. MAGNETI MARELLI 16906614 CARGO 231363 MOBILETRON RT-19H  Thick:17.5mm
270-080/MG6908 FEATURES Diodes:6-35 Ampere Button With Trio Thick:17.5mm REFERENCES.. DELCO 21220366 CARGO 130633 VALEO 581064 NB928 NB931 AS ARC4031  Thick:17.5mm	270-090/MG6911 FEATURES Diodes:6-25 Ampere Button With M6×50mm Battery Post With Trio REFERENCES.. ISKARA 11.201.810  Thick:17.5mm	270-160 FEATURES Diodes:6-35 Ampere With M6×45mm Battery Post With Trio Heat sink thickness:19.5mm REFERENCES.. FIT UNIT 0633396564010  Thick:19.5mm

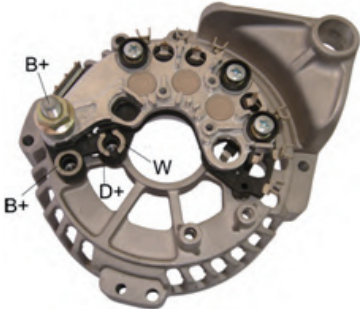

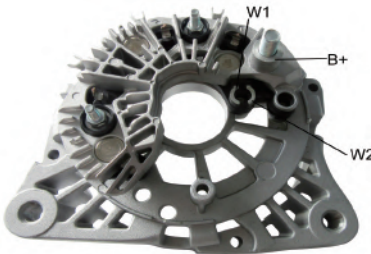



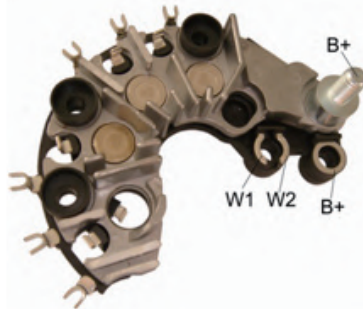
271-010/MG6904 FEATURES Diodes:6-35A Avalanche press fit diode With M6×50mm Battery Post With Trio REFERENCES.. VALEO 2522200 501104 CARGO 132673 MOBILETRON RT04H VOLTAG AET2673 	271-020/MG6913A FEATURES Diodes:6-35A Avalanche With M6×50mm Battery Post With Trio REFERENCES.. 	271-110 FEATURES Diodes:8-35A Avalanche With M6×34mm REFERENCES.. FIT UNIT 11.204.793 AAG5147 IA1669 LESTER 11901 
271-150 FEATURES Diodes:6-35 Avalanche With M8×46mm Battery Post REFERENCES.. FIT UNIT ANN5815 	271-160 FEATURES Diodes:8-50A Avalanche With M8×46mm Battery Post REFERENCES.. LESTER 11923 FIT UNIT AAK5840 11.204.467 	271-170 FEATURES Diodes:6-35A Avalanche With M6×44.4mm Battery Post With Trio REFERENCES.. LESTER 12713 WAI MG607 FIT UNIT AAK2302 0118 0661 
272-010/MG6301 FEATURES Diodes:6-50A Avalanche Diameter OD:121mm With M8×50mm Battery Post Without trio REFERENCES.. MAGNETI MARELLI 63624201 63320256 CARGO 138377 MOBILETRON RI-23H TRANSPO IXR642 FIT UNIT CA1558IR 	272-020/MG6302 FEATURES Diodes:8-50A Avalanche Diameter OD:111mm With M8×50mm Battery Post REFERENCES.. MAGNETI MARELLI 63321240 63623701 CARGO 138800 138376 MOBILETRON RI-19H TRANSPO IXR634 	272-030/MG6304 FEATURES Diodes:6-50A Avalanche Diameter OD:121mm With M6×34.5mm Battery Post REFERENCES.. MAGNETI MARELLI 63624202 CARGO 138801 MOBILETRON RI-24H TRANSPO IXR719 

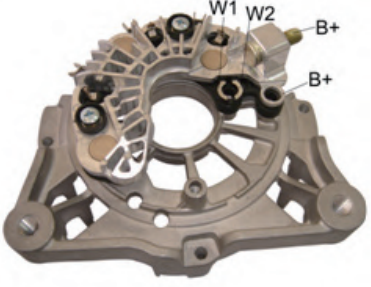
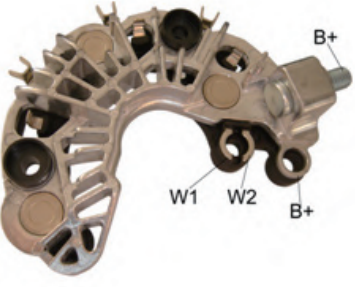




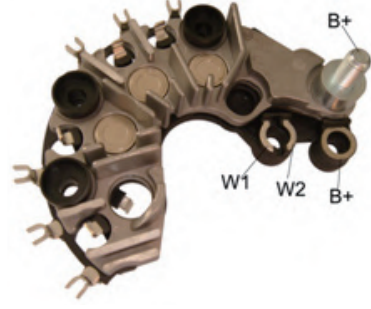
272-050/MG6305 FEATURES Diodes:6-35A Avalanche Diameter OD:111mm With M6×39.5mm Battery Post REFERENCES.. MAGNETI MARELLI 63341730 CARGO 112121 CA1217IR 272-060/MG6306 FEATURES Diodes:8-50A Avalanche 	272-070/MG6307 FEATURES Diodes: 6-35A Avalanche Diameter OD: 111mm With M8×50mm Battery Post REFERENCES.. MEGNETI MARELLI 63244901 63623301 CARGO 230119 136423 139214 MOBILETRON RI-14H WAI/TRANPO IXR633 	272-080/MG6309 FEATURES Diodes:6-35A Avalanche Diameter OD:111mm With M6×18.5mm Battery Post REFERENCES.. MAGNETI MARELLI 63624802 CARGO 230119 
272-090/MG6310 FEATURES Diodes: 8-35A Avalanche Diameter OD: 111mm With M6×18.5mm Battery Post REFERENCES.. MOBILETRON RZ-31 CARGO 233534 	272-100/MG6311 FEATURES Diodes: 6-50A Avalanche Diameter OD: 111mm With M6×39.5mm Battery Post REFERENCES.. MAGNETI MARELLI 63321636 CA1488IR CARGO 138792 MOBILETRON RZ-18H WAI IXR726 	272-110/MG6312 FEATURES Diodes: 6-35A Avalanche Diameter OD: 111mm With M8×50mm Battery Post Without trio REFERENCES.. MEGNETI MARELLI 063624701010 CARGO 138376 139214 VOLTAG AEE0635 
272-120/MG6313 FEATURES Diodes: 6-35A Avalanche Diameter OD: 111mm With M6×23.5mm Battery Post REFERENCES.. MEGNETI MARELLI 63377421 CARGO 330465 LESTER 23911 23965 23966 TRANPO IXR440 FIT UNIT 27060-0Q010 27060-0Q011 	272-130/MG6314 FEATURES Diodes:6-35A Avalanche Diameter OD:111mm With M8×50mm Battery Post REFERENCES.. MAGNETI MARELLI 63625002 CARGO 231025 MOBILETRON RZ-35 TRANPO IXR640 FIT UNIT CA1766IR 	272-150/MG6316 FEATURES Diodes:6-35A Avalanche Diameter OD:111mm With M6×39.5mm Battery Post REFERENCES.. 





272-160/MG6317 FEATURES Diodes:6-35A Avalanche Diameter OD:121mm With M8×46mm Battery Post REFERENCES.. FIT UNIT ALT348  Φ121mm	272-170/MG6318 FEATURES Diode:6-35A Avalanche Diameter OD:111mm With M8×33.3mm Battery Post With Trio REFERENCES..  Φ111mm	272-180/MG6319 FEATURES Diodes:6-50A Avalanche Diameter OD:121mm With M8×50mm Battery Post Without trio REFERENCES.. MAGNETI MARELLI 63377491 CARGO 239982 MOBILETRON RI-34 TRANSPO IXR7595 12722900 FEATURES With M8×46mm Battery Post  Φ121mm
272-230/MG6322A FEATURES Diodes:6-50A Avalanche Diameter:111mm With M6×39.5mm Battery Post REFERENCES..  Φ111mm	272-250 FEATURES Diodes:6-50A Avalanche Diameter OD:111mm With M8×49mm Battery Post REFERENCES..  Φ111mm	272-320 FEATURES Diodes:6-50A Avalanche Diameter OD:111 With M6×23.5mm Battery Post REFERENCES.. LESTER 20631 FIT UNIT 101210-1720  Φ111mm
272-340 FEATURES Diodes:6-50A Avalanche Diameter OD:111mm With M6×39.5mm Battery Post REFERENCES.. FIT UNIT AMM0022  Φ111mm	273-010/MG6303 FEATURES Diodes:6-35 Ampere Diameter OD:104mm With M6×41mm Battery Post With M4×17mm With Trio REFERENCES.. MAGNETI MARELLI 84574 CARGO 136740 136458 MOBILETRON RI-16H TRANSPO IXR542 FIT UNIT CA11911R  Φ104mm	274-010/MG6401 FEATURES Diodes:6-35A Avalanche With M6×41.7mm Battery Post With Trio REFERENCES.. MAGNETI MARELLI 0135240 0135241 CARGO 134977  Φ104mm


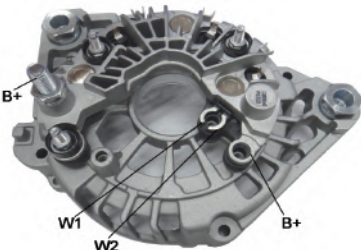
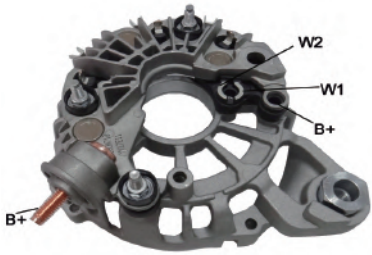
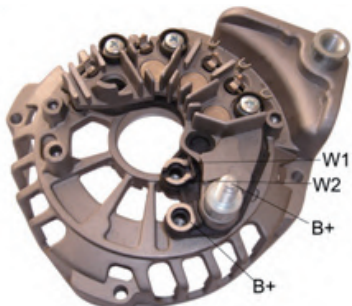
274-020/MG6402	274-030/MG6403	274-050/MG6405
FEATURES Diodes:6-35A Avalanche With M6×41.7mm Battery Post With M5×39mm Trio Post With M5×35mm W-Post With M5×35mm Mounting Post With Trio REFERENCES.. 	FEATURES Diodes:8-50A Avalanche With M8×43mm Battery Post With M5×28mm Trio Post With M5×39mm Mounting Post With Trio REFERENCES.. MAGNETI MARELLI 0138801 CARGO 234596 	FEATURES Diodes:8-50 Ampere With M6×41.7mm Battery Post With Trio REFERENCES.. MAGNETI MARELLI 0135940 0135941 CARGO 231721 
274-090		
FEATURES Diodes:8-50 Ampere With M6×41.7mm Battery Post Without Trio REFERENCES.. FIT UNIT 45-2971 		

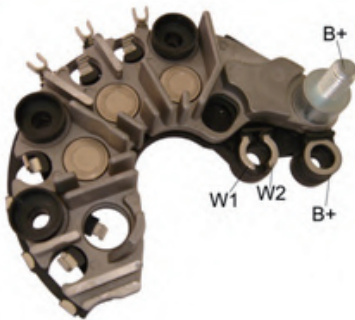


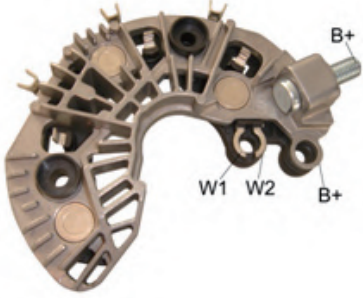


[illegible]






280-010/VAL201 FEATURES Diodes: 6-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt With Trio REFERENCES.. 	280-030/VAL201H FEATURES Diodes: 3-50 A Avalanche With (M8+M6)×44.5mm Battery Post With Trio Without negative heat sink as VAL201 REFERENCES.. 	280-131 FEATURES Diodes:6-60A Avalanche With M8×30mm Battery Post Bracket ID: 140.2mm Bearing ID: 37.5mm Mounting: 2-M10×1.5 REFERENCES.. LESTER 23795 FIT UNIT TG15C015 
280-173 FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11064 11070 FIT UNIT TG14C025 	280-187 FEATURES Diodes:6-60A Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 23370 FIT UNIT TG15C058 	280-188 FEATURES Diodes:6-60A Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115730 LESTER 11425 11463 FIT UNIT TG14C023 
280-200/VAL205 FEATURES Diodes: 6-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 	280-230/VAL205H FEATURES Diodes: 3-50 A Avalanche Without Trio With (M8+M6)×44.5mm Battery Post Without negative heat sink as VAL205 REFERENCES.. 	280-234 FEATURES Diodes:6-50A Avalanche With (M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115549 LESTER 20027 FIT UNIT SG9B107 







280-240/VAL206 FEATURES Diodes: 6-50A Avalanche With M8×30mm Battery Post With M5×25mm Mounting Bolt REFERENCES.. 	280-260 FEATURES Diodes:6-50A Avalanche With M8×30mm Battery Post Bracket ID: 140mm Bearing ID: 37.5mm Mounting: 2-M10×1.5 REFERENCES.. 	280-270/VAL206A FEATURES Diodes:6-50A Avalanche With M8×30mm Battery Post With M5×36.5mm Mounting Post Customer provide Negative heat sink REFERENCES.. 
280-320/VAL206H FEATURES Diodes: 3-50 A Avalanche Without Trio With M8×30mm Battery Post Without negative heat sink as VAL206 REFERENCES.. CARGO 332114 	280-323 FEATURES Diodes:6-50A Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113246 LESTER 23164 MOBILETRON RP-51 FIT UNIT SG10B023 TG9B043 	280-371 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. 
280-372 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT TG9B030 	280-390/VAL208 FEATURES Diodes: 3-50 A Avalanche Without Trio With M8×30mm Battery Post Without negative heat sink as VAL206 REFERENCES.. CARGO 233615 	280-430/VAL208H FEATURES Diodes: 3-60 A Avalanche Without Trio With (M8+M6)×44.5mm Battery Post Without negative heat sink as VAL208 REFERENCES.. 





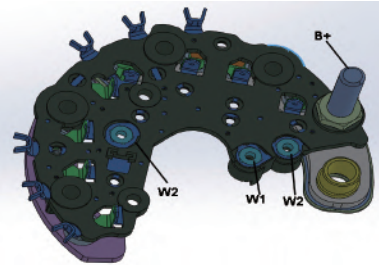


280-431 FEATURES Diodes:6-60A Avalanche With (M8+M6)×53mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1349 CARGO 112397 LESTER 11208 FIT UNIT SG12B049 SG12B012 	280-450 FEATURES Diodes:6-50A Avalanche With(M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 112469 LESTER 21493 FIT UNIT A13VI242 A13VI277 	280-460/VAL209-2 FEATURES Diodes : 6-50A Avalanche With(M8+M6)×51.5mm Battery Post With M5×25mm Mounting Bolt REFERENCES.. 
280-490/VAL211 FEATURES Diodes : 6-50A Avalanche With(M8+M6)×53mm Battery Post With M5×25mm Mounting Bolt With Trio Customer provide Negative heat sink REFERENCES.. FIT UNIT JA17811R 23909 	280-510/VAL211H FEATURES Diodes: 3-50 A Avalanche With (M8+M6)×53mm Battery Post With Trio Without negative heat sink as VAL211 REFERENCES.. 	280-512 FEATURES Diodes:6-50A Avalanche With (M8+M6)×53mm Battery Post REFERENCES.. CARGO 113791 LESTER 23910 FIT UNIT 2655517 600028 TA000A55601 
280-513 FEATURES Diodes:6-50A Avalanche With(M8+M6)×53mm Battery Post With Trio Customer provide negative heat sink REFERENCES.. LESTER 11737 FIT UNIT 2655641 A000265564 	280-515 FEATURES Diodes:6-50A Avalanche With(M8+M6)×53mm Battery Post Customer provide negative heat sink REFERENCES.. 	280-516 FEATURES Diodes:6-50A Avalanche With (M8+M6)×53mm Battery Post With Trio Customer provide negative heat sink REFERENCES.. CARGO 113791 LESTER 23910 FIT UNIT 600028 TA000A55601 







280-518 FEATURES Diodes:6-35A Avalanche With (M8+M6)×53mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113791 LESTER 23910 FIT UNIT 37300-02550 ALT14197 	280-540/VAL212 FEATURES Diodes: 6-50 A Avalanche With M8×34.5mm Battery Post With M5×36.5mm Mounting Bolt Without Trio Customer provide Negative heat sink REFERENCES.. FIT UNIT CA1862IR 	280-560/VAL212H FEATURES Diodes: 3-50 A Avalanche Without Trio With M8×34.5mm Battery Post Without negative heat sink as VAL212 REFERENCES.. 
280-563 FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1427 AL-1492 LESTER 11111 11191 11193 FIT UNIT TG12C057 	280-564 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1427 AL-1492 LESTER 11111 11191 11193 FIT UNIT 37300-3C250 TG12C057 	280-565 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113721 LESTER 23797 FIT UNIT TG8S010 
280-566 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114293 115622 LESTER 24151 FIT UNIT TG9S014 	280-568 FEATURES Diodes:6-50 Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CAL15400GS LESTER 20581 WAI MER533 FIT UNIT TG9S100 593859 	280-580/VAL213 FEATURES Diodes: 6-60A Avalanche With (M8+M6)×44.5 mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 





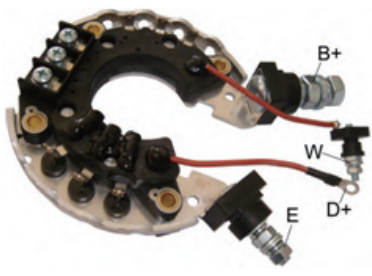

280-600/VAL213H FEATURES Diodes: 3-60 A Avalanche With (M8+M6)×44.5mm Battery Post Without Trio Without negative heat sink as VAL213 REFERENCES.. CARGO RES08931 	280-602 FEATURES Diodes:6-60A Avalanche With (M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. TRANSPO MER5218 593552 	280-603 FEATURES Diodes:6-50A Avalanche With (M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT SVES082417 
280-670/VAL214A FEATURES Diodes: 3-60 A Avalanche Without Trio With M8×33.3mm Battery Post Without negative heat sink as VAL214 REFERENCES.. CARGO 235654 TRANSPO RES12488 VALEO SG15S021 CA1509IR 	280-672 FEATURES Diodes:6-60A Avalanche With M8×33.3mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 20129 FIT UNIT TG15C157 	280-674 FEATURES Diodes:6-60A Avalanche With M8×33.3mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CA2033IR LESTER 20256 FIT UNIT TG15S205 
280-675 FEATURES Diodes:6-60A Avalanche With M8×33.3mm Battery Post Bracket ID: 140.2mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. CARGO 114130 CA18573IR LESTER 23896 FIT UNIT TG15C121 	280-676 FEATURES Diodes:6-60A Avalanche With M8×33.3mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CA2033IR LESTER 20256 FIT UNIT TG15C135 	280-678 FEATURES Diodes: 6-60A Avalanche With M8×33.3mm Battery Post Customer provide negative heat sink Bracket ID: 142mm Bearing ID: 37.5mm Mounting: 2-M10*1.5 REFERENCES.. FIT UNIT TG15C016 






280-700/VAL215-2 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post Customer provide Negative heat sink REFERENCES.. TRANSPO MER523 VALEO 2600172 	280-809 FEATURES Diodes:6-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CA2043IR LESTER 20343 FIT UNIT TG11C027 TG11C063 	280-810/VAL216 FEATURES Diodes: 6-50A Avalanche With (M8+M6)×51.5mm Battery Post With M5×25mm Mounting Bolt With Trio Customer provide Negative heat sink REFERENCES.. FIT UNIT SG9S130 SG9S070A 
280-850 FEATURES Diodes:3-50A Avalanche With M8×33.3mm Battery Post REFERENCES.. 	280-860/VAL218 FEATURES Diodes : 6-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. FIT UNIT SG7S012 	280-890/VAL218H FEATURES Diodes:3-50 A Avalanche With (M8+M6)×44.5mm Battery Post Without Trio Without negative heat sink as VAL218 REFERENCES.. 
280-891 FEATURES Diodes:6-50A Avalanche With (M8+M6)×53mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115654 LESTER 20624 FIT UNIT 2607052 	280-892 FEATURES Diodes:6-50A Avalanche With (M8+M6)×53mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115654 MOBILETRON RN-16PL FIT UNIT TG17C027 	280-912 FEATURES Diodes:6-50A Avalanche With M6×47.5mm Battery Post With Trio Bracket ID: 115mm Bearing ID: 34mm Mounting: 8.3mm REFERENCES.. CARGO 114114 LESTER 21431 FIT UNIT JA1600IR TA000A30601 


280-913 FEATURES Diodes:6-35A Avalanche With (M6+M6)×47.5mm Battery Post With Trio Customer provide negative heat sink REFERENCES.. LESTER 23999 221431 FIT UNIT TA000A52201 TA000A52202 	280-960/VAL223 FEATURES Diodes: 6-50A Avalanche With M6×34.5mm Battery Post With M5×36.5mm Mounting Bolt Without Trio Customer provide Negative heat sink REFERENCES.. FIT UNIT TG9C013 	281-200/VAL853-2 FEATURES Diodes: 6-50 Ampere Diameter OD: 107mm With M8×49mm Battery Post Without "W" Terminal With Trio REFERENCES.. OME NO Audi Volkswagen 030-903-359A CARGO 231736 135494 VALEO 135293 2521487 2523372 TRANSPO MER592 LESTER 12098 12422  Φ107mm
281-040/VAL841 FEATURES Diodes: 8-50A Avalanche Diameter OD: 107mm With M8×49mm Battery Post Without Trio Without "W" Terminal REFERENCES.. LESTER 13721 13864 21400 TRANSPO IPR840 CARGO 138303 VALEO 2546312 546312 281-020/VAL840 FEATURES Diodes: 6-50A Avalanche REFERENCES.. WAI IPR841 FIT UNIT CA1304IR  Φ107mm	281-060/VAL842 FEATURES Diodes: 8-50A Avalanche Diameter OD: 107mm With M8×49mm Battery Post Without Trio With "W" Terminal REFERENCES.. MOBILETRON RP-23 CARGO 138303 VALEO 593174 593306  Φ107mm	281-080/VAL844 FEATURES Diodes: 6-50A Avalanche Diameter OD: 107mm With M8×49mm Battery Post With Trio With "W" Terminal REFERENCES.. MOBILETRON RP-14 TRANSPO IPR844 CARGO 135427 VALEO 2546062 2546076 FIT UNIT CA715IR 281-100/VAL845 FEATURES Diodes: 8-50A Avalanche  Φ107mm
281-130/VAL847 FEATURES Diodes: 6-50A Avalanche Diameter OD: 107mm With (M8+M6)×60.8mm Battery Post Without Trio With "W" Terminal For use on: Renault, Peugeot REFERENCES.. TRANSPO IPR847 MOBILETRON RP-18 VALEO 2545938 545937  Φ107mm	281-150/VAL850 FEATURES Diodes: 8-50A Avalanche Diameter OD: 107mm With (M8+M6)×60.8mm Battery Post Without Trio With "W" Terminal REFERENCES.. TRANSPO IPR846 MOBILETRON RP-17 VALEO 2545941 545940 CARGO 135518  Φ107mm	281-160/VAL851 FEATURES Diodes: 6-50 A Avalanche Diameter OD: 107mm With M8×43mm Battery Post With Trio With "W" Terminal REFERENCES.. MOBILETRON RP-37 TRANSPO IPR848 CARGO 135278 VALEO 2546048 546041 281-260/VAL857 FEATURES Diodes: 8-50A Avalanche  Φ107mm





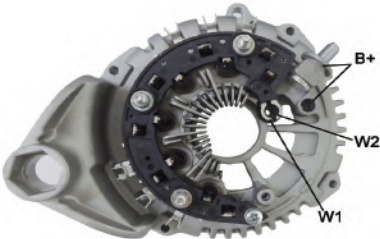


281-170/VAL852 FEATURES Diodes: 6-50A Avalanche Diameter OD: 107mm With M8×60.8mm Battery Post Without Trio With "W" Terminal REFERENCES.. LESTER 21435 281-220/VAL855 FEATURES Diodes: 8-50A Avalanche  Φ107mm	281-190/VAL853 FEATURES Diodes: 6-50A Avalanche Diameter OD: 107mm With M8×49mm Battery Post Without "W" Terminal With Trio REFERENCES.. TRANSPO MER592 MOBILETRON RP-15 CARGO 135494 231736 VALEO 592915 281-010/VAL814 FEATURES Diodes: 8-50A Avalanche  Φ107mm	281-230/VAL855-1 FEATURES Diodes: 6-50A Avalanche Diameter OD: 107mm With (M8+M6)×46mm Battery Post Without Trio With "W" Terminal 281-240/VAL855-2 FEATURES Diodes: 8-50A Avalanche With (M8+M6) ×50mm Battery Post  Φ107mm
281-280/VAL858B FEATURES Diodes: 6-50A Avalanche Diameter OD: 107mm With M8×49mm Battery Post With M5×25mm W-post With Trio For 24V Alternator REFERENCES.. MOBILETRON RP-28 CARGO 139483 VALEO 2546423  Φ107mm	281-380 FEATURES Diodes: 8-60A Avalanche With M8×49mm Battery Post Diameter OD: 107mm REFERENCES.. CARGO 113994 LESTER 23349 MOBILETRON RP-41 FIT UNIT SG15L027  Φ107mm	281-390 FEATURES Diodes: 8-50A Avalanche Diameter OD: 107mm With (M8+M6)×50mm Battery Post REFERENCES.. CARGO 113961 LESTER 12421 FIT UNIT A13V1243 TRANSPO IPR846  Φ107mm
282-010/VAL103 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Trio Without Capacitor For use on: Renault REFERENCES.. TRANSPO IPR103 CARGO 131569 VALEO 21224163  Φ115mm	282-020/VAL135 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor Without Trio For use on: Renault, Toro, Winnebago REFERENCES.. TRANSPO IPR135 CARGO 131228 VALEO A103543A MOBILETRON RP-01  Φ115mm	282-030/VAL157 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm Without Capacitor Without Trio For use on: Renault Alliance, 18i Fuego REFERENCES.. TRANSPO IPR157 VALEO NC113 MOBILETRON RP-03  Φ115mm








282-040/VAL253 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor Without Trio Live "W" Circuit REFERENCES.. TRANSPO IPR253 CARGO A13N230 	282-050/VAL537 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor With Trio For use on: Citroen, fiat, peugeot REFERENCES.. TRANSPO IPR537 CARGO 131164 MOBILETRON RP-04H VALEO 592595 	282-060/VAL252 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor Without Trio Live "W" Circuit For use on: Renault REFERENCES.. TRANSPO IPR252 CARGO 132985 MOBILETRON RP-07 VALEO A523707A 
282-071/VAL539 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor Without Trio REFERENCES.. TRANSPO IPR539 CARGO 133689 MOBILETRON RP-03 VALEO A105901A 	282-080/VAL538 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor With Trio For use on: Peugeot 205, Renault R25 REFERENCES.. TRANSPO IPR747 CARGO 134098 133882 MOBILETRON RP-09 VALEO 592747 	282-090/VAL813-1 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor With Trio With 82 Ohm Resistor REFERENCES.. TRANSPO IPR813 CARGO 133741 MOBILETRON RP-09R VALEO A521404A NC142 WAI 31-9430 
282-100/VAL687 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor With Trio REFERENCES.. VALEO A13N269 	282-110/VAL615 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor Without Trio For use on: Volvo Penta REFERENCES.. TRANSPO IPR-615 CARGO 131573 MOBILETRON RP-08 VALEO NC143 	282-120/VAL616 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor With Trio REFERENCES.. OEM NO A103543A CARGO 131228 






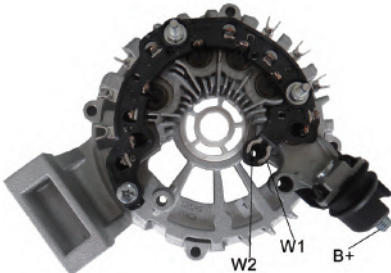
282-130/VAL551 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor With Trio Live "W" Circuit For use on: AMC, Peugeot, Renault REFERENCES.. TRANSPO IPR551 CARGO 131701 MOBILETRON RP-02 VALEO A523726A 	282-160/VAL688 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor With Trio REFERENCES.. TRANSPO IPR203 CARGO 131164 MOBILETRON RP-04 VALEO 592596 	282-170/VAL713 FEATURES Diodes: 6-50 Ampere Diameter OD: 115mm With Capacitor With Trio REFERENCES.. TRANSPO IPR713 CARGO 133687 MOBILETRON RP-05H VALEO 210303 
282-180/VAL773 FEATURES Diodes:6-50 Ampere Diameter OD:115mm Without Capacitor With Trio With 82 Ohm Resistor REFERENCES.. TRANSPO IPR773 CARGO 131569 MOBILETRON RP-04R VALEO NC134 	282-210/NPD13002 FEATURES Diodes:6-35 Ampere Diameter OD:130mm With M10×50.5mm Battery Post With M6×40mm Ground Post With Trio/Capacitor REFERENCES.. 	283-061 FEATURES Diodes:6-50A Avalanche With M8×40mm REFERENCES.. 
283-460 FEATURES Diodes:6-50A Avalanche With M8×45.6mm Battery Post REFERENCES.. FIT UNIT JFZ1929C-60 	284-010/VAL815P FEATURES Diodes : 12-35A Avalanche With M8×37.5mm Battery Post With M4×14mm Mounting Bolt REFERENCES.. FIT UNIT CA1756IR CARGO 233614 VALEO 593287 	284-030/VAL816P FEATURES Diodes: 12-35A Avalanche With M8×37.5mm Battery Post With M4×14mm Mounting Bolt REFERENCES.. FIT UNIT CA1509IR CARGO 232199 VALEO 593499 2809019 2809020 TRANSPO MER1920 






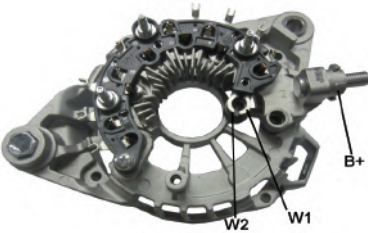

285-010 FEATURES Diodes: 6-50A Avalanche With M8×32.8mm With M5×36.5mm REFERENCES.. 	285-012 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1388 LESTER 11450 FIT UNIT FG18S014 	285-014 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. 
285-015 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1451 LESTER 11442 FIT UNIT FG18S040 	285-016 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink Bracket ID: 137mm Bearing ID: 37.5mm Mounting:10.5mm REFERENCES.. LESTER 23907 FIT UNIT FG18S023 	285-017 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1388 LESTER 11450 FIT UNIT FG18S014 
285-019 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1322 LESTER 11222 FIT UNIT 06E903016M 	285-029 FEATURES Diodes: 6-50 A Avalanche With M8×34.5mm Customer provide negative heat sink REFERENCES.. LESTER 20653 FIT UNIT TG12C106 TG12C228 	285-054 FEATURES Diodes: 12-50A Avalanche With M8×37mm Battery Pos Bracket ID: 138.8mm Bearing ID: 37.5mm REFERENCES.. 







285-080 FEATURES Diodes:6-50AAvalanche With M8×32mm Battery Post Without Trio REFERENCES.. LESTER 20091 TRANSPO MER530 	285-085 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114292 LESTER 24100 MOBILETRON RL-05HI TRANSPO LR553 FIT UNIT FG18S019 	285-086 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink Bracket ID: 149mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. LESTER 11260 MOBILETRON RP-59 TRANSPO MER5209 FIT UNIT 2542720 2542720F TG17C015 
285-087 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1370 LESTER 11396R FIT UNIT TG17C036 	285-089 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113896 LESTER 11262 23319 TRANSPO 23319N FIT UNIT TG17C011 	285-123 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Bracket ID: 130mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. LESTER 11453 FIT UNIT FG15S097 FG15S100 
285-124 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink Bracket ID: 130mm Bearing ID: 37.5mm Mounting:2-M10*1.5 REFERENCES.. OEM NO AL-5113 LESTER 11560 FIT UNIT FG12S032 	285-125 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink Bracket ID: 130mm Bearing ID: 37.5mm Mounting:2-M10*1.25 REFERENCES.. LESTER 11606 11710 FIT UNIT FG15S059 FG15S060 	285-126 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-5110 LESTER 11486 FIT UNIT FG15S032 






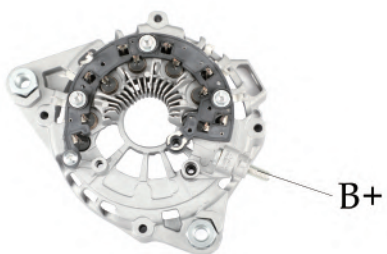

285-129 FEATURES Diodes:12-35A Avalanche With M8×37m Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11560 FIT UNIT 2613307A FG12S043 	285-140 FEATURES Diodes:12-50A Avalanche With M8×32.8mm With M5×36.5mm With M5×25mm Customer provide negative heat sink REFERENCES.. VALEO 595202 LESTER 20091 TRANSPO MER530 FIT UNIT 2543444 TG23C017 CA2053IR 	285-141 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11309 FIT UNIT TG17C032 
285-143 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 137mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. BOSCH UNIT 0 986 083 660 0986083670 LESTER 11738 11812 22721 VALEO NO 2613451 599172 WAI MER5274 	285-144 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink Bracket ID: 137mm Bearing ID: 37.5mm Mounting:2-M8 REFERENCES.. LESTER 11811 11823 FIT UNIT FG18S073 FG18S061 	285-146 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11355 11358 FIT UNIT TG17C021 A400-022-K 
285-160 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11802 FIT UNIT FG12S045 2613695 	285-161 FEATURES Diodes: 6-50A Avalanche With M8×37mm Battery Post REFERENCES.. 	285-162 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Bracket ID: 130mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. FIT UNIT SGE01013A1 JFZ19116 






285-163 FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11265 11802 FIT UNIT FG12S045 	285-166 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-5107 LESTER 11465 FIT UNIT FG15S023 	285-168 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post REFERENCES.. FIT UNIT FGN12S113 
285-170 FEATURES Diodes:12-50A Avalanche With M8×43mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT BV6T-10300EA FG15S091 	285-172 FEATURES Diodes:12-50A Avalanche With M8×43mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-5620 LESTER 11651 FIT UNIT FG15S024 FG15S024SP 	285-190 FEATURES Diodes:12-50A Avalanche With M8×32.8mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT TG17C044 TG17C023 2542798 437528 
285-192 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 137mm Bearing ID: 37.5mm Mounting: 2-M8 REFERENCES.. 	285-195 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 149mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. FIT UNIT AV305A201 25-381-1R 	285-199 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 128mm Bearing ID: 37.5mm Mounting: 2-M8 REFERENCES.. LESTER 11709 FIT UNIT FG23S031 









285-36Z FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 149mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. LESTER 11715 FIT UNIT TG23C035 595289 	285-243 FEATURES Diodes:6-50 A Avalanche With M8/L=37mm Battery Post REFERENCES.. 	285-246 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1565 LESTER 11654 FIT UNIT FG12S048 FG12S065 
285-252 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11959 FIT UNIT FG12S023 	285-260 FEATURES Diodes:12-50A Avalanche With M8×40mm With M5×36.5mm With M5×25mm Customer provide negative heat sink REFERENCES.. TRANPO IPR847 MOBILETRON RP-18 VALEO 2545938 545937 	285-261 FEATURES Diodes:6-50A Avalanche With M8×40mm REFERENCES.. VALEO UNIT 2612531 AS ARC3134 HYUNDAI 3736725700 VOLTAG AEV2610 
285-262 FEATURES Diodes:12-50A Avalanche With M8×38mm Battery Post Customer provide negative heat sink REFERENCES.. 	285-267 FEATURES Diodes: 12-35A Avalanche With M8×38mm Battery Post REFERENCES.. FIT UNIT FG15S059 LESTER 11606 11710 WAI/TRANPO MER5268 Vehicle Model HYUNDAI, KIA 	285-290 FEATURES Diodes:12-50A Avalanche With M8×40mm With M5×36.5mm With M5×25mm Customer provide negative heat sink REFERENCES.. TRANPO IPR847 MOBILETRON RP-18 VALEO 2545938 545937 

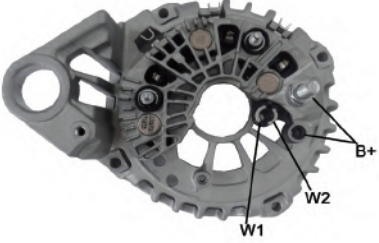


285-291 FEATURES Diodes:6-50A Avalanche With M8×43mm Battery Post REFERENCES.. 	285-300 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO 37300-2F100 LESTER 20338 FIT UNIT FG15S034 	285-301 FEATURES Diodes:6-60A Avalanche With M8×37mm Battery Post REFERENCES.. 
285-305 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CAL32155 LESTER 20338 FIT UNIT FG15S034 37300-2F100 	285-306 FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 2606259 	285-312 FEATURES Diodes:6-50A Avalanche With M8×37mm Battery Post REFERENCES.. UTM NO EV5219B AS ARC3132 ZAUFER 312N10772Z VOLTAG AEV5219 
285-313 FEATURES Diodes:12-50A Avalanche With M8×37mm Battery Post Bracket ID: 130mm Bearing ID: 37.5mm Mounting: M10*1.25 REFERENCES.. LESTER 10246 FIT UNIT 37300-2E800 	285-317 FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 116215 LESTER 20957 FIT UNIT 37300-4A320 	285-318 FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Customer provide negative heat sink Bracket ID: 130mm Bearing ID: 37.5mm Mounting:M10*1.25 REFERENCES.. CARGO 116215 LESTER 20957 FIT UNIT 37300-4A320 


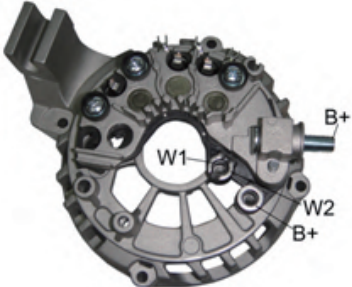
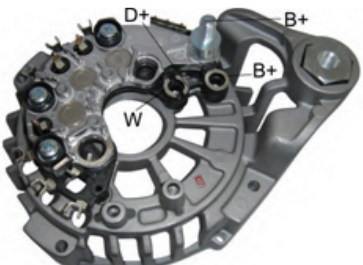
285-319 FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Bracket ID: 130mm Bearing ID: 37.5mm Mounting: M10*1.5 REFERENCES.. LESTER 21001 FIT UNIT 37300-2E821 	285-352 FEATURES Diodes: 12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. 	285-354 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1274 LESTER 11281 FIT UNIT TG17C039 
285-358 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO LRA03384 CARGO CAL15394 LESTER 11809 FIT UNIT FG23S057 	285-359 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 12781 FIT UNIT LRA0333 Bosch 0 124 515 126 	285-361 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11706 FIT UNIT FG20S015 
285-362 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11808 FIT UNIT FG18S029 	285-365 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11808 FIT UNIT 0141540902 	285-366 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1371 CARGO CAL15467 CAL15467GS LESTER 11397 FIT UNIT TG23C011 




285-367 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114524 LESTER 11206 WAI MER5209 FIT UNIT TG17C015 	285-368 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114292 LESTER 24100 FIT UNIT FG18S019 	285-369 FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CAL15352GS LESTER 20091 FIT UNIT TG23C017 
285-510 FEATURES Diodes:6-35A Avalanche With M6×28mm Battery Post REFERENCES.. UTM NO EV1162A VALEO UNIT FGN15S116 LESTER 11936 VOLTAG AEV1162 	285-513 FEATURES Diodes:12-35A Avalanche With M6×28mm Battery Post Bracket ID: 130mm Bearing ID: 37.5mm Mounting: M10×1.25 REFERENCES.. FIT UNIT 27060-0V280 	285-520 FEATURES Diodes:6-35A Avalanche With M8×38mm Battery Post REFERENCES.. FIT UNIT FG12S168 
285-530 FEATURES Diodes: 12-35A Avalanche With M8×35mm Battery Post REFERENCES.. OEM NO 37300-3L050 	285-531 FEATURES Diodes:12-35A Avalanche With M8×35mm Battery Post Bracket ID: 139mm Bearing ID: 37.5mm Mounting: M10*1.25 REFERENCES.. LESTER 21086 FIT UNIT 37300-3L001 2713145 	280-A10/VAL225 FEATURES Diodes:6-50A Avalanche With (M8+M6)×53mm Battery Post With Trio Customer provide Negative heat sink REFERENCES.. 


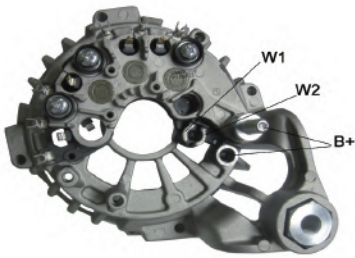




280-A50/VAL230 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post With M5×36.5mm Mounting Bolt Without Trio Customer provide Negative heat sink REFERENCES.. TRANSPO MER524 VALEO 2650237 	280-A52 FEATURES Diodes:3-50 A Avalanche With M8×35mm Battery Post REFERENCES..	280-A54 FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1098 LESTER 11018 MOBILETRON RP-65HD FIT UNITS TG15C026 
280-A55 FEATURES Diodes:6-60A Avalanche With M8×33.3mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 20256 FIT UNIT TG15C135 LS17239 WAI/TRANSPO MER5261 	280-AD0/VAL928H FEATURES Diodes: 3-50A Avalanche With (M8+M6)×44.5mm Battery Post Without Trio Without negative heat sink as VAL928 REFERENCES.. 	280-AG1 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1096 LESTER 11014 TRANSPO MER523 FIT UNIT TG11C028 JA1807IR 
280-AN0/VAL9014A FEATURES Diodes:6-50A Avalanche With (M6+M6)×47.5mm Battery Post Without Trio Customer provide Negative heat sink REFERENCES.. 	280-AN1 FEATURES Diodes:3-50A Avalanche With (M8+M6)×51.5mm Battery Post Without Trio REFERENCES.. 	280-AP0/VAL9015A FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post With M5×36.5mm Mounting Bolt Without Trio Customer provide Negative heat sink REFERENCES.. TRANSPO MER5235 VALEO TG12C027 TG12C042 LESTER 11142 GM 15237366 25787949 





280-AP2 FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11023 TRANSPO MER5224 FIT UNIT TG13S029 TG13S030 	280-AQ0/VAL9016A FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post Without Trio Customer provide Negative heat sink REFERENCES.. TRANSPO MER5240 	280-AT0/VAL9018A FEATURES Diodes: 3-50A Avalanche With M8×40mm Battery Post Without Trio REFERENCES.. UTM NO EV0523A ZAUFER 312N10078Z VOLTAG AEV0523 
280-AT1 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink Bracket ID: 125.3mm Bearing ID: 37.5mm Mounting:2-M8 REFERENCES.. VALEO NO 702105 LESTER 11673 WAI/TRANSPO MER5278 NISAAN UNIT 23100-3SH2B 	280-AT2 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post REFERENCES.. FIT UNIT CA1927IR 	280-AT3 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 37300-25020 
280-AT5 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post Bracket ID: 133.5mm Bearing ID: 37.5mm Mounting:2-M10*1.25 REFERENCES.. OEM NO AL-1469 CARGO 114902 LESTER 11490 FIT UNIT 37300-2C110 	280-AT6 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1470 LESTER 11491 VALEO UNIT TG11C087 WAI/TRANSPO MER5281 	280-AT7 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 12C209 2622171A 


280-ATD FEATURES Diodes:6-50 Avalanche With M8×40mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 2610987 21Q6-42001 R300LC-9S R430LC-9 	280-ATP FEATURES Diodes:6-60A Avalanche With M8×34.5mm Battery Post Bracket ID: 136.2mm Bearing ID: 37.5mm Mounting: 2-M8 REFERENCES.. LESTER 11334 20213 24011 24052 TRANSPO MER537 FIT UNIT 332114 	280-AY0/VAL9021A FEATURES Diodes: 6-60A Avalanche With M8×30mm Battery Post With M5×36.5mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 
280-AZ0/VAL902-2 FEATURES Diodes : 8-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25 mm Mounting Bolt Without Trio Customer provide Negative heat sink REFERENCES.. FIT UNIT SG12B019 	280-B10/VAL9023A FEATURES Diodes : 6-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25 mm Mounting Bolt Without Trio Customer provide Negative heat sink REFERENCES.. VALEO 593393 LESTER 13928 	280-B11 FEATURES Diodes:6-50A Avalanche With (M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114883 LESTER 24011 TRANSPO MER5229 FIT UNIT 2543246 TG12C037 
280-B20/VAL9024 FEATURES Diodes: 6-50A Avalanche With M8×34.5mm Battery Post With M5×36.5mm Mounting Bolt Without Trio REFERENCES.. VALEO NO 593464 LESTER 11098 13970 13974 21470 WAI/TRANSPO MER5230 EGI NO 77PR-179 	280-B33 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1202 CARGO 115855 JA1903IR LESTER 11188 FIT UNITS 2655424 A0002655524 WAI/TRANSPO MER523 	280-B50/VAL9026A FEATURES Diodes: 6-50A Avalanche With M8×35mm Battery Post With M5×36.5mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 





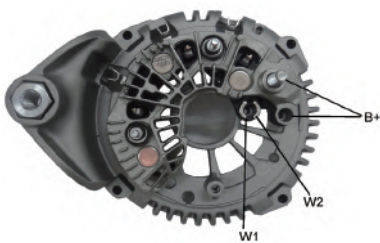
280-B60/VAL9027A FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post With M5×36.5mm Mounting Bolt Without Trio Customer provide Negative heat sink REFERENCES.. 	280-B80/VAL9029A FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post With M5×25mm Mounting Bolt Without Trio Customer provide Negative heat sink REFERENCES.. LESTER 13993 TRANSPO MER5203 FIT UNIT 2650010 SG10S029 	280-B90/VAL902H FEATURES Diodes: 4-50 A Avalanche Without Trio With (M8+M6)×44.5mm Battery Post Without negative heat sink as VAL902-2 REFERENCES.. 
280-BB0/VAL903 FEATURES Diodes : 6-50A Avalanche With(M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt With Trio REFERENCES.. MOBILETRON MER528 CARGO 235652 VALEO 2547906 	280-BC0 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post Bracket ID: 119mm Bearing ID: 37.5mm Mounting: 8.5mm REFERENCES.. 	280-BE0/VAL9032A FEATURES Diodes: 6-80A Avalanche With M8×32mm Battery Post With M5×36.5mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. VALEO 593899 
280-BN0/VAL903H FEATURES Diodes : 3-50A Avalanche With(M8+M6)×44.5mm Battery Post With Trio Without negative heat sink as VAL903 REFERENCES.. 	280-BR0/VAL9040A FEATURES Diodes: 6-50A Avalanche With (M6+M6)×47.5mm Battery Post With M5×25mm Mounting Bolt With Trio Customer provide Negative heat sink REFERENCES.. 	280-BS0/VAL9041A FEATURES Diodes: 8-50A Avalanche With(M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 

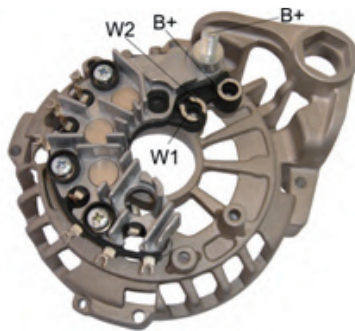



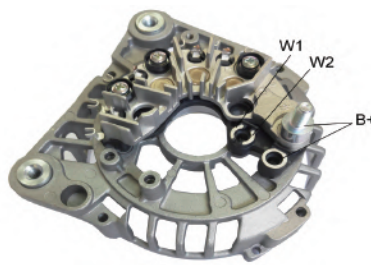
280-BT0/VAL9042A FEATURES Diodes: 6-60A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 	280-BW0/VAL9045A FEATURES Diodes: 6-50A Avalanche With M6×34.5mm Battery Post With M5×36.5mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 	280-BY0/VAL9047A FEATURES Diodes: 8-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. LESTER 21460 FIT UNIT SG9B033 
280-C00/VAL9049A FEATURES Diodes: 6-50A Avalanche With M8×35mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. LESTER 13938 TRANSPO MER5202 FIT UNIT SG12S084 	280-C10/VAL905 FEATURES Diodes : 6-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 	280-C20/VAL9050A FEATURES Diodes: 6-50A Avalanche With M8×40mm Battery Post With M5×36.5mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 
280-C71 FEATURES Diodes:6-60A Avalanche With (M8+M6)×53mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT SG12S126 	280-C80/VAL9058A FEATURES Diodes: 6-60A Avalanche With M8×33.3mm Battery Post Customer provide Negative heat sink REFERENCES.. 	280-CB2 FEATURES Diodes:6-50A Avalanche With (M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115549 CA1976IR LESTER 20027 FIT UNIT SG9B107 SG9B035 

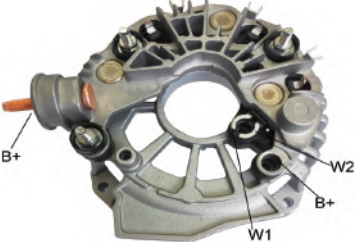





280-CB5 FEATURES Diodes:6-35A Avalanche With (M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113253 LESTER 21486 FIT UNIT LRA02794 SG8B026 	280-CD1 FEATURES Diodes:6-50A Avalanche With(M8+M6)×44.5mm Battery Post Bracket ID: 132mm Bearing ID: 37mm Mounting: M10*1.5 REFERENCES.. MOBILETRON RP-62 TRANSPO MER528 FIT UNIT 2547906 593463 	280-CE0/VAL906-1 FEATURES Diodes:6-50A Avalanche With(M8+M6)×41.5mm Battery Post Without Trio Customer provide Negative heat sink REFERENCES.. FIT UNIT SG913037 
280-CE1 FEATURES Diodes:6-50A Avalanche With (M8+M6)×41.5mm Battery Post Customer provide negative heat sink REFERENCES.. 	280-CF2 FEATURES Diodes:6-50A Avalanche With(M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113950 LESTER 23223 23222 FIT UNITS SG12B040 SG9B054 	280-CF3 FEATURES Diodes:6-50A Avalanche With(M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113248 CA1645IR LESTER 23160 FIT UNITS SG12B050 SG12B095 SG12B108 SG12B116 
280-CF5 FEATURES Diodes:6-50A Avalanche With(M8+M6)×44.5mm Battery Post Bracket ID: 140mm Bearing ID: 37.5mm Mounting: M10*1.5 REFERENCES.. 	280-CF7 FEATURES Diodes:6-50 Avalanche With (M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114673 113248 LESTER 22990-5G 21360 FIT UNIT SG12B038 SG12B050 	280-CG1 FEATURES Diodes:3-60A Avalanche With M8×43mm Battery Post REFERENCES.. 


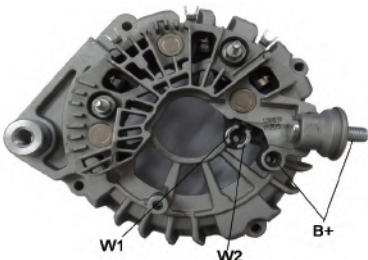
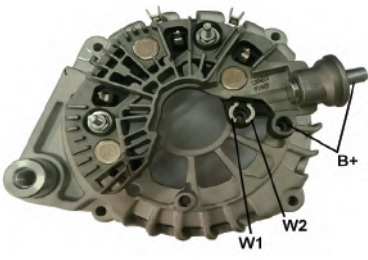






280-CG2 FEATURES Diodes:6-60A Avalanche With M8×46.5mm Battery Post Customer provide negative heat sink REFERENCES.. 	280-CG3 FEATURES Diodes:6-60A Avalanche With M8×43mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 7G9T-10300-AE 	280-CH0/VAL9063A FEATURES Diodes: 6-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. VALEO UNIT SG14B19 SG14B020 LESTER 11050 FIT UNIT 2549502-M2 
280-CK0/VAL9066AH FEATURES Diodes: 4-50A Avalanche With Trio With (M8+M6)×44.5mm Battery Post REFERENCES.. 	280-CK2 FEATURES Diodes:8-35A Avalanche With (M8+M6)×44.5mm Battery Post With Trio For 24V Alternators REFERENCES.. LESTER 23515 MOBILETRON RP-40H FIT UNIT SG12B020 SG12B045 	280-CN0/VAL9069A FEATURES Diodes: 6-50A Avalanche With M8×40mm Battery Post With M5×36.5mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. CARGO 11014 VALEO A0002655009 
280-CN2 FEATURES Diodes:6-60A Avalanche With M8×40mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1096 CARGO 112327 LESTER 11014 FIT UNIT TG11C028 	280-CP1 FEATURES Diodes:6-50A Avalanche With (M8+M6)×41.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 23065 FIT UNIT SG9B056 	280-CP2 FEATURES Diodes:6-50A Avalanche With (M8+M6)×41.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 111943 LESTER 21466 22851 TRANSPO MER5228 FIT UNIT SG9B038 0121544302 






280-CQ0/VAL9070A FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post With M5×36.5mm Mounting Post Customer provide Negative heat sink REFERENCES.. TRANSPO MER5225 	280-CT0/VAL9072A FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post With M5×36.5mm Mounting Bolt Custom provide Negative heat sink REFERENCES.. VALEO NO 595233 LESTER 24252 AS ARC3049 WAI/TRANSPO MER5249 	280-CT3 FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114721 CA1974IR LESTER 20135 20411 FIT UNIT TG15C146 
280-CV0/VAL9074A FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post With M5×25mm Mounting Post Customer provide Negative heat sink For use on: Chevrolet, Oldsmobile, (2007-01) Buick, Pontiac REFERENCES.. LESTER 13866 13943 TRANSPO MER5204 FIT UNIT 2542454A 2542559A 	280-CX0/VAL9075A FEATURES Diodes: 6-50 A Avalanche With (M6+M6)×47.5mm Battery Post Customer provide Negative heat sink REFERENCES.. 	280-CX1 FEATURES Diodes:3-50 A Avalanche With (M6+M6)×47.5mm Battery Post REFERENCES.. 
280-CX2 FEATURES Diodes:6-50A Avalanche With M6+M6=47.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 30-01114-02 	280-CZ1 FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post With Trio Customer provide negative heat sink REFERENCES.. CARGO 115815 LESTER 20572 FIT UNIT 2655633 37300-03100 	280-CZ4 FEATURES Diodes:6-35 Avalanche With M8×35.5mm Battery Post With Trio Customer provide negative heat sink REFERENCES.. CARGO 115815 LESTER 20572 FIT UNIT 37300-03100 ALT14511 


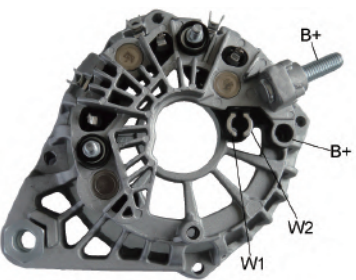



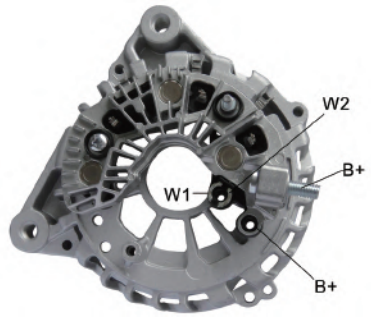


280-D00/VAL9077A FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post With M5×36.5mm Mounting Post Customer provide Negative heat sink REFERENCES.. VALEO NO 595233 LESTER 24252 WAI/TRANSPO MER5249 VALEO UNIT TG15C125 	280-D2A FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. 	280-D2E FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT TG17C024 
280-D6A FEATURES Diodes:6-50A Avalanche With M8×36mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-5078 LESTER 11148 FIT UNIT TG12S047 TG12S089 	280-D01 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Bracket ID: 132.2mm Bearing ID: 37.5mm Mounting: 10.5mm REFERENCES.. LESTER 11227 TRANSPO MER5247 FIT UNIT 18470128 2655553 	280-D10/VAL9078A FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post With M5×36.5mm Mounting Post Customer provide Negative heat sink REFERENCES.. FIT UNIT TG17C041 
280-D20/VAL9079A FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post With M5×36.5mm Mounting Post Customer provide Negative heat sink REFERENCES.. FIT UNIT TG14C011 	280-D29 FEATURES Diodes:6-80 Avalanche With M8×32mm Battery Post Bracket ID: 149mm Bearing ID: 37.5mm Mounting: M10*1.5 REFERENCES.. CARGO 235867 LESTER 23319 FIT UNIT TG17C010 WAI/TRANSPO MER531 	280-D60/VAL9083A FEATURES Diodes:6-50A Avalanche With M8×36mm Battery Post With M5×36.5mm Mounting Bolt Without Trio Customer Provide Negative heat sink REFERENCES.. TRANSPO MER5246 LESTER 11069 VALEO 2650400 TG11S011 










280-D62 FEATURES Diodes:3-50 A Avalanche With M8×36mm Battery Post REFERENCES.. 	280-DD0/VAL9091A FEATURES Diodes: 6-50AAvalanche With M8×35.5mm Battery Post With M5×36.5mm Mounting Bolt Without Trio Customer provide Negative heat sink REFERENCES.. 	280-DJ0/VAL927 FEATURES Diodes: 6-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. GAUSS NO GA1830 LESTER 13970 PSH 053.000.490.000 053.000.490.006 TRANSP0 MER538 
280-DT0/VAL928 FEATURES Diodes: 6-50A Avalanche With (M8+M6)×44.5mm Battery Post With M5×25mm Mounting Bolt Customer provide Negative heat sink REFERENCES.. 	280-E10 FEATURES Diodes:6-50A Avalanche With(M8+M6)×44.5mm Battery Post Bracket ID: 140mm Bearing ID: 37.5mm Mounting: M10*1.5 REFERENCES.. 	280-F50 FEATURES Diodes: 3-50 A Avalanche With M8×35mm Battery Post Without Trio 280-180/VAL202H FEATURES Diodes: 3-60 A Avalanche With M8×30mm Battery Post Without Trio REFERENCES.. UTM NO EV0531A EV0531B LESTER 11262 11425 20505 22990 CARGO 239788 TRANSP0 MER531 VALEO NO 2602613 2650430 593797 
280-F52 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post Without Trio Customer provide negative heat sink REFERENCES.. FIT UNIT AVA3327 	280-F54 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post Without Trio Customer provide negative heat sink REFERENCES.. FIT UNIT TG12C0700 	280-FG0 FEATURES Diodes:6-50A Avalanche With(M8+M6)×44.5mm Battery Post Bracket ID: 140mm Bearing ID: 37.5mm Mounting: 2-M8 REFERENCES.. LESTER 20624 FIT UNIT 37300-02600 37300-02605 2607052 





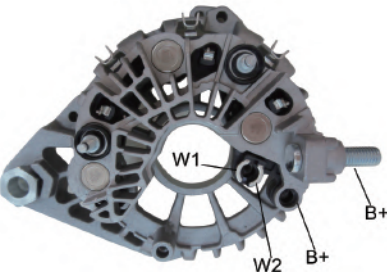
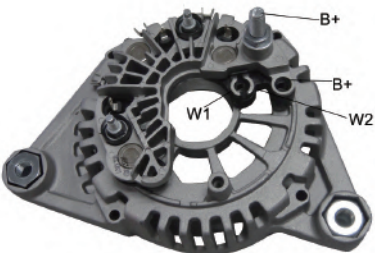

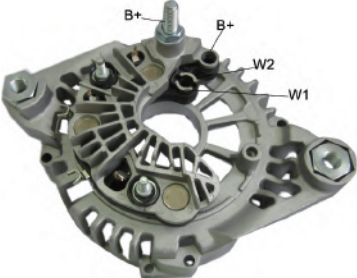
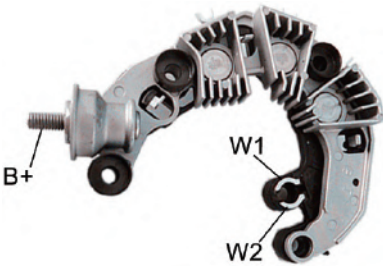
280-FH0 FEATURES Diodes:6-50A Avalanche With M6×34.5mm Battery Post Bracket ID: 124.5mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. LESTER 11334 20213 24011 24052 WAI MER537 FIT UNIT 332114 TG12C122 	280-FJ0 FEATURES Diodes:6-50A Avalanche With(M8+M6)×44.5mm Battery Post Bracket ID: 118mm Bearing ID: 34mm Mounting: 10.2mm REFERENCES.. FIT UNIT CA1637 	280-FK0 FEATURES Diodes 6-50A Avalanche With(M8+M6)×41.5mm Battery Post Bracket ID: 132.2mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. FIT UNIT CA1342 
280-FM0 FEATURES Diodes:8-50A Avalanche With(M8+M6)×44.5mm Battery Post Bracket ID: 132.2mm Bearing ID: 37.5mm Mounting: 10.5mm REFERENCES.. LESTER 20506 20507 20510 FIT UNIT SG10B019 8251648 CA1572 	280-FQ0 FEATURES Diodes: 6-50 A Avalanche With M8×34.5mm Battery Post Customer provide Negative heat sink REFERENCES.. KIA 37300-2A010 VALEO 2655103 	280-FV0 FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post Bracket ID: 135mm Bearing ID: 37.5mm Mounting: 10.5 REFERENCES.. 
280-GE0 FEATURES Diodes:3-50A Avalanche With M8×35.5mm Battery Post Without negative heat sink as VAL9070A REFERENCES.. 	280-GE5 FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11648 FIT UNIT TG12C152 	280-GE6 FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11648 FIT UNIT TG12C152 


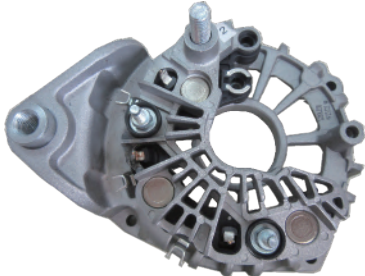
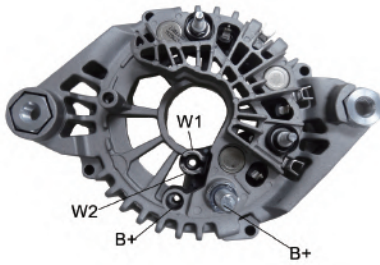




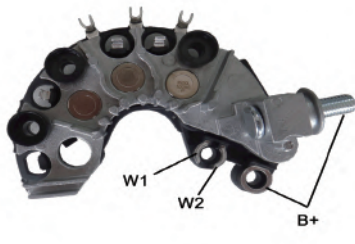
280-GE7 FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Bracket ID: 136mm Bearing ID: 37.5mm Mounting: 21mm REFERENCES.. EGI NO 77PR-176 LESTER 11258 WAI/TRANSPO MER5225 NISSAN UNIT 23100-JA02A 23100-JA02B VALEO NO 702111 VALEO UNIT TG12C032 	280-GE8 FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11258 11458 11567 MOBILETRON RP-72 FIT UNIT 23100-JA02B 23100-JA02C TG12C116 	280-GEC FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 442213 
280-GEE FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. VALEO UNIT 442318 	280-GEF FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Bracket ID: 136.2mm Bearing ID: 37.5mm Mounting: 2-M8 REFERENCES.. LESTER 11648 WAI MER5276 FIT UNIT TG12C152 	280-GL1 FEATURES Diodes:6-50A Avalanche With(M8+M6)×44.5mm Battery Post With Trio Customer provide negative heat sink REFERENCES.. FIT UNIT 216-903-FZ204 
280-GN0 FEATURES Diodes:8-50A Avalanche With(M6+M6)×37mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT CVS082570 	280-H13 FEATURES Diodes:6-35A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114293 CA1977IR LESTER 23560 FIT UNIT TG8S024 	280-H14 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1453 LESTER 11452 FIT UNIT 37300-26100 

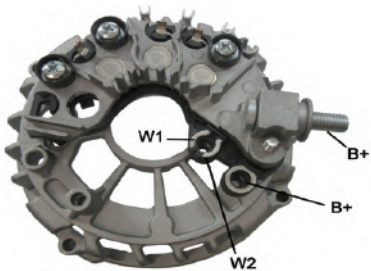







280-HK1	280-HR0	280-HY0
FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Bracket ID: 132.2mm Bearing ID: 37.5mm Mounting: M10×1.25 REFERENCES.. LESTER 20796 TRANSPO MER5251 FIT UNIT TG12C033 37300-2A50 	FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Bracket ID: 118mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. 	FEATURES Diodes: 6-60A Avalanche With M8×34.5mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. VALEO UNIT TG11C011 EGI NO 77DV-122 LESTER 20453 23174 
280-J40	280-J50	280-J80
FEATURES Diodes: 6-80A Avalanche With M8×32mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. LESTER 20129 FIT UNIT TG15C012 	FEATURES Diodes: 6-80A Avalanche With M8×32mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. LESTER 23290 FIT UNIT TG17C041 	FEATURES Diodes: 6-80A Avalanche With M8×35mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. LESTER 23890 FIT UNIT TG15C157 TRANSPO MER5212 
280-JA0	280-JC0	280-JD0
FEATURES Diodes:6-80A Avalanche With M8×32mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. LESTER 11306 11309 VALEO TG17C028 CHRYSLER 04801250AB 	FEATURES Diodes:6-50A Avalanche With M8×41.9mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT 37300-3300 37300-2B301 	FEATURES Diodes:6-50A Avalanche With M8×30mm Battery Post Bracket ID: 119mm Bearing ID: 37.5mm Mounting:M10*1.25 REFERENCES.. 


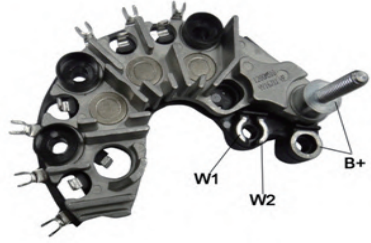


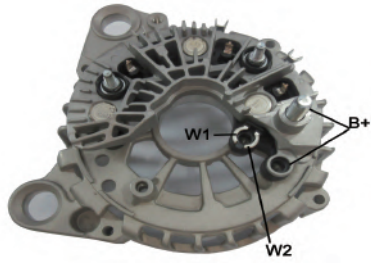

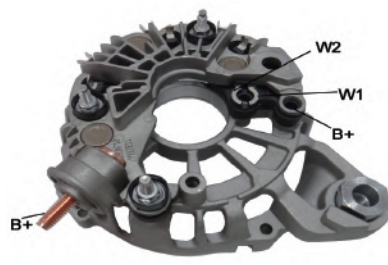
280-JF0 FEATURES Diodes:6-80A Avalanche With M8×33.3mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. LESTER 20716 FIT UNIT TG15C176 TG15C173 TG15C174 	280-JJ0 FEATURES Diodes: 6-50A Avalanche With M8×37mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. LESTER 11610 FIT UNIT 2610428 WAI/TRANSPO MER5263 	280-JS0 FEATURES Diodes: 6-50A Avalanche With M8×32.8mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT 2610428 
280-JW0 FEATURES Diodes:6-60 A Avalanche With M8×43mm With M5×36.5mm With M5×25mm Customer provide negative heat sink REFERENCES.. FIT UNIT TG9T-10300-BD 	280-K30 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11696 FIT UNIT TG12C066 2605325 	280-K61 FEATURES Diodes:6-80A Avalanche With M8×33.3mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114102 CA2038IR LESTER 23290 FIT UNIT TG17C041 
280-KC0 FEATURES Diodes: 6-60A Avalanche With M8×33.3mm With M5×25mm Customer provide negative heat sink REFERENCES.. EGI NO 77DV-156 VALEO UNIT TG15C186 LESTER 20214 	280-KD0 FEATURES Diodes: 6-60A Avalanche With M8×33.3mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. LESTER 24052 FIT UNIT TG12C038 VALEO 595374 	280-KD3 FEATURES Diodes: 6-50Avalanche With M8×33.3mm Battery Post Bracket ID: 136.2mm Bearing ID: 37.5mm Mounting: 2-M10*1.5 REFERENCES.. VALEO NO 595374 LESTER 24052 VALEO UNIT TG12C038 TG12C122 FORD UNIT 1506299 8V21-10300-AB 

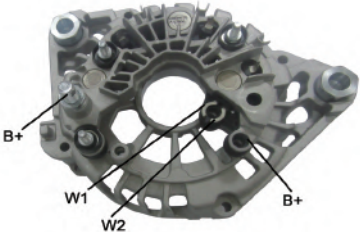







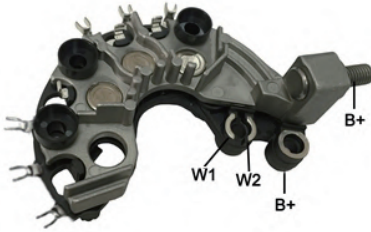
280-KG0 FEATURES Diodes:6-50A Avalanche With M8×37mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT TG12C068 	280-KH1 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 9070278 	280-KH2 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Bracket ID: 119mm Bearing ID: 37.5mm Mounting: 8.5mm REFERENCES.. HYUNDAI NO 37360-22651 VALEO NO 691618 FIT UNIT JR1789IR VALEO UNIT TG9S018 VOLTAG AEA1789 
280-KH4 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 9025553 	280-KH5 FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. 	280-KH7 FEATURES Diodes:6-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CA2101IR LESTER 22555 TRANSPO 22555N-OS FIT UNIT TG12C077 
280-KHG FEATURES Diodes:6-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1202 CARGO 115855 JA1903IR LESTER 11188 FIT UNIT 37300-37800 JA1903IR 	280-KHH FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. VALEO 442319 	280-KHP FEATURES Diodes:6-35A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT 04E903023N 



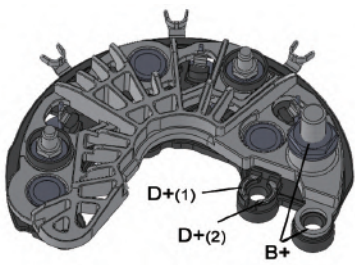
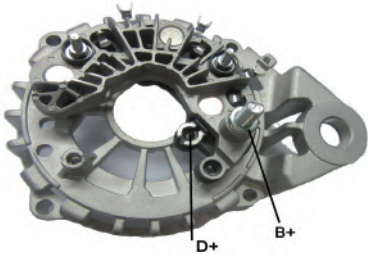
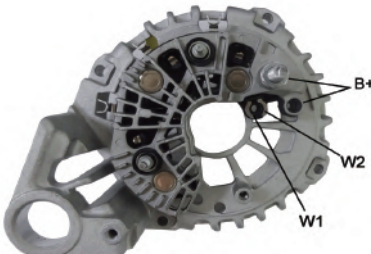
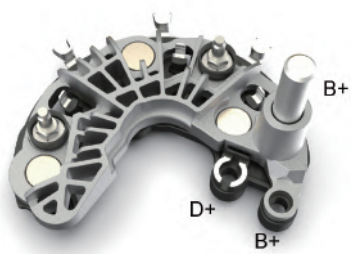


280-KW0 FEATURES Diodes: 6-60A Avalanche With M8×36mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT CVS082547 	280-KY0 FEATURES Diodes:8-50A Avalanche With M8+M6=44.5mm With M5×25mm With Trio REFERENCES.. LESTER 13946 CARGO 231099 TRANSPO MER5242 FIT UNIT SG9B059 280-KZ0 FEATURES Diodes:6-50A Avalanche Customer provide negative heat sink 	280-L00 FEATURES Diodes: 6-50A Avalanche With M8×30mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT TG12C120 LESTER 11334 
280-L10 FEATURES Diodes: 6-60A Avalanche With M8×32mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT TG14C018 	280-L20 FEATURES Diodes:6-50A Avalanche With M8×35.5mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT 37300-2E300 LESTER 11611 	280-L30 FEATURES Diodes:6-50 A Avalanche With M8×40mm With M5×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT 37300-39450 LESTER 11012 
280-L40 FEATURES Diodes:6-60A Avalanche With M8×30mm Battery Post REFERENCES.. LESTER 20540N FIT UNIT 442030 CA2002IR 	280-L50 FEATURES Diodes:6-50A Avalanche With M8×40mm Battery Post REFERENCES.. FIT UNIT MER5217 2655544 37300-25201 LESTER 11611 	280-LB0 FEATURES Diodes:6-35A Avalanche With M6×34mm With M5×36.5mm With M5×25mm REFERENCES.. FIT UNIT 27350-0Y110 








280-LD0 FEATURES Diodes:6-50 A Avalanche With M8×36.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT TG11C021 LESTER 23886 TRANSP MER5236 VALEO 2601847 	280-LE0 FEATURES Diodes:6-50 A Avalanche With M8×34.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT 2542926 TG8C018 CA19631R LESTER 23886 	280-LG0 FEATURES Diodes:6-50 A Avalanche With M8×40mm Customer provide negative heat sink REFERENCES.. FIT UNIT 37300-25600 2606446 2607928 2608052 LESTER 13111 
280-LH0 FEATURES Diodes:6-35A Avalanche With M8×35.5mm Customer provide negative heat sink REFERENCES.. FIT UNIT 2655633 37300-03100 	280-LH2 FEATURES Diodes:3-35A Avalanche With M8×35.5mm Battery Post REFERENCES.. 	280-LH3 FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113791 LESTER 23910 FIT UNIT 2655517 600028 TA000A55601 
280-LH9 FEATURES Diodes:6-35 Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 115815 LESTER 20572 FIT UNIT 37300-03300 ALT14511 	280-LK0 FEATURES Diodes:6-60A Avalanche With M8×33.3mm REFERENCES.. LESTER 23332 TRANSP MER5231 FIT UNIT SG15S019 2542565 439473 	280-LZ0 FEATURES Diodes:3-50A Avalanche With M8×35mm Battery Post REFERENCES.. 



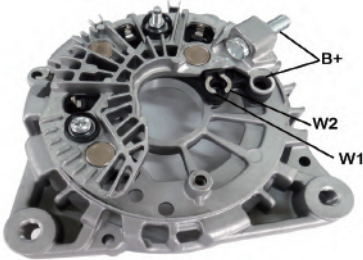



280-LZ3 FEATURES Diodes:6-50 Avalanche With M8×35mm Battery Post Bracket ID: 127mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. LESTER 11047 FIT UNIT SG10S039 	280-M00 FEATURES Diodes:3-50 A Avalanche With M8×35.5mm Battery Post REFERENCES.. 	280-M0A FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. 
280-M0F FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT LRA3366 	280-M04 FEATURES Diodes:6-60A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink Bracket ID: 136.2mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. LESTER 20556 FIT UNIT FG15T045 	280-M06 FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1566 LESTER 13209 MOBILETRON RP-56 TRANSPO MER602 FIT UNIT 2607372 2616741 
280-M07 FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11700 FIT UNIT 2612741 	280-M10 FEATURES Diodes:6-50A Avalanche With (M6+M6)×33mm Battery Post With Trio Customer provide negative heat sink REFERENCES.. LESTER 5498775 	280-M21 FEATURES Diodes:L6-50A Avalanche With (M6+M6)×33mm Battery Post Without Trio Customer provide negative heat sink REFERENCES.. FIT UNIT CVS085420 







280-M40 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post Customer provide negative heat sink REFERENCES.. 	280-M41 FEATURES Diodes:6-50A Avalanche With (M6+M6)×50.5mm Battery Post With Trio REFERENCES.. 	280-M50 FEATURES Diodes:3-50A Avalanche With (M6+M6)×50.5mm Battery Post REFERENCES.. 
280-M51 FEATURES Diodes:6-50A Avalanche With (M6+M6)×50.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 22341 FIT UNIT SG12B094 	280-M60 FEATURES Diodes:3-60A Avalanche With M8×35mm Battery Post REFERENCES.. 	280-M62 FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post Bracket ID: 140mm Bearing ID: 37.5mm Mounting: 18.5mm REFERENCES.. FIT UNIT TC15C012 
280-M63 FEATURES Diodes:6-60 Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CAL15464 115916 LESTER 20644 20353 FIT UNIT TG15C149 TG14C049 	280-M70 FEATURES Diodes:3-50A Avalanche With M6×34.5mm Battery Post REFERENCES.. 	280-M71 FEATURES Diodes:6-50A Avalanche With M6×34.5mm Battery Post Bracket ID: 125.3mm Bearing ID: 37.5mm Mounting: M10*1.25 REFERENCES.. LESTER 11693 FIT UNIT FG12T050 27060-0T230 






280-M82 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post Bracket ID: 136.2mm Bearing ID: 37.5mm Mounting: 2-M10*1.25 REFERENCES.. OEM NO AL-1427 AL-1492 LESTER 11111 11191 11193 FIT UNIT 37300-3C250 TG12C057 	280-M91 FEATURES Diodes:6-50A Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114877 LESTER 23353 FIT UNIT TG8C011 	280-MA1 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1306 LESTER 11334 FIT UNIT TG15S188 TG12C120 
280-MB1 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink Bracket ID: 149mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. CARGO 114102 CA2038IR LESTER 23290 FIT UNIT TG17C041 TG17C061 	280-MB2 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink Bracket ID: 149mm Bearing ID: 37.5mm Mounting: 2-M8 REFERENCES.. CARGO 114109 CA1912IR LESTER 11257 TRANSPO 11221N FIT UNIT TG17C019 	280-MB9 FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114102 LESTER 23290 FIT UNIT TG17C041 
280-MBB FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11806 FIT UNIT 059903023K 	280-MBF FEATURES Diodes:6-60A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1235 CARGO 113992 LESTER 11134 WAI 11134N FIT UNIT TG14C011 TG14C016 	280-MC0 FEATURES Diodes:3-50A Avalanche With M8×29.5mm Battery Post REFERENCES.. 









280-MC1 FEATURES Diodes:6-50A Avalanche With M8×29.5mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 112480 LESTER 21440 FIT UNIT SG10B021 	280-MD1 FEATURES Diodes:6-35A Avalanche With M6×45mm Battery Post Customer provide negative heat sink REFERENCES.. 	280-ME0 FEATURES Diodes:3-35A Avalanche With M8×40mm Battery Post With Trio For 28V Alternators REFERENCES.. 
280-ME1 FEATURES Diodes:6-35A Avalanche With M8×40mm Battery Post With Trio Customer provide negative heat sink REFERENCES.. OEM NO 129E20-77200 FIT UNIT 2616028/68 	280-MF0 FEATURES Diodes:6-50A Avalanche With M8×35mm Battery Post Customer provide negative heat sink With Trio For 28V Alternators REFERENCES.. FIT UNIT 21Q6-42000 	280-MH0 FEATURES Diodes:3-35A Avalanche With M10×53mm Battery Post With Trio For 28V Alternators REFERENCES.. FIT UNIT 37300-48100 
280-MH1 FEATURES Diodes:6-35A Avalanche With M10×53mm Battery Post With Trio For 28V Alternators Bracket ID: 133mm Bearing ID: 37.5mm Mounting: 12.5 REFERENCES.. 	280-MJ2 FEATURES Diodes: 6-35A Avalanche With M8×29.5mm Battery Post REFERENCES.. OEM NO DELCO AD237 FIT UNIT 37300-2A010 CROSS NO CARGO: 113863 LESTER: 24024 WAI/TRANSP 46-1464 VEHICLE MODEL HYUNDAI KIA 	280-MK0 FEATURES Diodes:3-35A Avalanche With M6×47.5mm Battery Post With Trio REFERENCES.. LESTER 8619 FIT UNIT 300111406 8MR2127LA 8MR2127LB 8MR2321L 


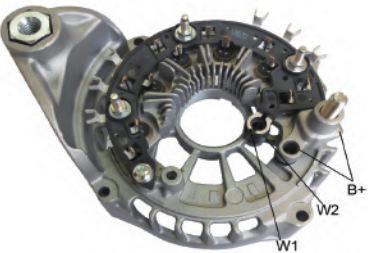






280-18B FEATURES Diodes:6-80A Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1271 LESTER 11262 TRANSPO MER531 FIT UNIT TG17C011 	280-18C FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-5090 CARGO 24024 LESTER 11327 FIT UNIT TG12C044 	280-18E FEATURES Diodes:6-60A Avalanche With M8×35mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT SVES082586 
280-18F FEATURES Diodes:6-60A Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-5030 LESTER 13968 13969 TRANSPO MER5239 FIT UNIT TG15C047 TG15C090 TG15C108 	280-18S FEATURES Diodes:6-60 Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1417 CARGO 115631 LESTER 24115 FIT UNIT TG15C095 	280-18T FEATURES Diodes:6-80 Avalanche With M8×30mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11829 FIT UNIT FG18T071 059903023H 
280-18X FEATURES Diodes:6-60A Avalanche With M8×30mm Battery Post Bracket ID: 142.8mm Bearing ID: 37.5mm Mounting: 2-M8 REFERENCES.. LESTER 24115 FIT UNIT TG15C095 	280-32B FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Bracket ID: 136.2mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. CARGO CAL15360GS CAL35233AS LESTER 11334 WAI MER5229 FIT UNIT TG12C037 TG12C059 TG12C087 TG12C120 	280-32C FEATURES Diodes:6-50 Avalanche With M8×35.5mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1460 CARGO 114467 LESTER 11471 FIT UNIT 37300-2B101 

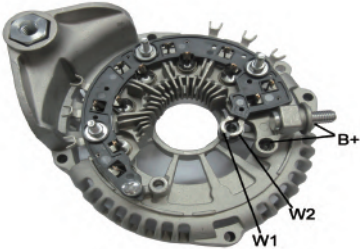

280-60B FEATURES Diodes:6-60A Avalanche With (M8+M6)×44.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11064 11070 11723 23115 23116 23255 23256 FIT UNIT SG14B010 SG14B016 SG14B022 TG14C025 	280-60G FEATURES Diodes : 6-60A Avalanche With(M8+M6)×44.5mm Battery Post REFERENCES.. 	280-67D FEATURES Diodes:6-60 Avalanche With M8×33.3mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113640 LESTER 23301 FIT UNIT TG15C028 
280-67E FEATURES Diodes:6-80 Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CAL15382GS 113896 LESTER 20879 11262 WAI 20879N-OE 22319N FIT UNIT 0121615005 	280-67F FEATURES Diodes:6-60 Avalanche With M8×32mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CAL15407 LESTER 20294 FIT UNIT TG15C130 TG15C182 	280-67M FEATURES Diodes:6-80A Avalanche With M8×33.3mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 20879 FIT UNIT TG17C034 
280-69B FEATURES Diodes: 6-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 132.2mm Bearing ID: 37.5mm Mounting: 10.5 REFERENCES.. 	280-80A FEATURES Diodes:6-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO CA2098IR LESTER 20399 FIT UNIT TG9B047 TG9B053 	280-80D FEATURES Diodes:6-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT CVS082558 




280-80F FEATURES Diodes:6-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 136.2mm Bearing ID: 37.5mm Mounting: 2-M8 REFERENCES.. FIT UNIT CA18171R 	280-80H FEATURES Diodes:6-50A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 113877 CA1775IR LESTER 23285 24101 TRANSPO 23285N FIT UNIT TG12C026 	280-80J FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 24024 FIT UNIT 37300-2A010 37300-2A050 
280-80L FEATURES Diodes:6-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. 	280-80M FEATURES Diodes:6-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 136.2mm Bearing ID: 37.5mm Mounting: M10*1.25 REFERENCES.. CARGO CA2133IR LESTER 20409 MOBILETRON TG12C090 TG12C118 	280-80N FEATURES Diodes:6-50A Avalanche With M8×34.5mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 20594 FIT UNIT TG12C199 TG12C092 
280-80Q FEATURES Diodes:6-60A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT TG155191 	280-80R FEATURES Diodes:6-60A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT FG15T036 	280-80U FEATURES Diodes:6-60 Avalanche With M8×34.5mm Battery Post REFERENCES.. CARGO CAL15017GS LESTER 20552N FIT UNIT FG15T071 




280-80W FEATURES Diodes:6-50A Avalanche With M8×36mm Battery Post Bracket ID: 136.2mm Bearing ID: 37.5mm Mounting: 10.2mm REFERENCES.. OEM NO AL-5106 LESTER 11459 FIT UNIT TG12C288 	280-80Y FEATURES Diodes:6-50A Avalanche With M8×37mm Battery Post Bracket ID: 133.2mm Bearing ID: 37.5mm Mounting: 10.5mm REFERENCES.. LESTER 11188 FIT UNIT 2655524 	280-89A FEATURES Diodes:6-35A Avalanche With(M8+M6)×53mm Battery Post Bracket ID: 115mm Bearing ID: 34mm Mounting: 8.5mm REFERENCES.. LESTER 20624 FIT UNIT 37300-02600 37300-02605 2607052 
285-01Q FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 137mm Bearing ID: 37.5mm Mounting: 10.5mm REFERENCES.. CARGO 114082 LESTER 23905 FIT UNIT FG18S108 	285-01S FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 137mm Bearing ID: 37.5mm Mounting: 2-M8 REFERENCES.. FIT UNIT FG23S025 	285-01T FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11393 FIT UNIT FG23S010 
285-01W FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 137mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. FIT UNIT FG23S016/11498 FG23S044 Valeo New 439699 	285-08A FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1331 MOBILETRON RN-16PL LESTER 11355 FIT UNIT TG17C027 TG17C027B 	285-08B FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT TG18S019 



285-08C FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. MOBILETRON MER5274 FIT UNIT TG18S046 2613451 599172 	285-08D FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink Bracket ID: 137mm Bearing ID: 37.5mm Mounting: 2-M10*1.5 REFERENCES.. 	285-08E FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. 
285-08F FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. 	285-08G FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1368 AL-1476 CARGO 115807 LESTER 11393 FIT UNIT FG23S010 FG23S043 FG23S054 	285-08H FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. OEM NO AL-1389 LESTER 11451 FIT UNIT TG23C012 
285-08X FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post REFERENCES.. CARGO CAL15468 CAL15468GS LESTER 11457 FIT UNIT TG23C019 	285-14J FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 137mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. LESTER 11711 11442 FIT UNIT FG18S040 FGN18S040 	285-14Q FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 137mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. LESTER 11393 FIT UNIT FG23S043 

285-16G FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Bracket ID: 130mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. FIT UNIT 26677173 FGN15S139 FG12S015A 	285-19H FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Bracket ID: 143mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. FIT UNIT FGN18S146 	285-19P FEATURES Diodes:12-35A Avalanche With M8×32.8mm Battery Post Bracket ID: 137mm Bearing ID: 37.5mm Mounting: M10×1.5 REFERENCES.. LESTER 11450 FIT UNIT FG18S014 
285-24C FEATURES Diodes:12-50 Avalanche With M8×37mm Battery Post REFERENCES.. FIT UNIT FGN15S123 	285-24D FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11802 FIT UNIT FG12S045 	285-24E FEATURES Diodes: 12-50A Avalanche With M8×37mm Battery Post REFERENCES.. FIT UNIT JFZ10284-500 CARGO 11399 LESTER 11399 Vehicle Model ALFA ROMEO SUZUKI FIAT 
285-31B FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Bracket ID: 130mm Bearing ID: 37.5mm Mounting: M10×1.25 REFERENCES.. LESTER 20655 FIT UNIT 37300-2A850 	285-31E FEATURES Diodes:12-35A Avalanche With M8×37mm Battery Post Bracket ID: 130mm Bearing ID: 37.5mm Mounting: M10×1.25 REFERENCES.. LESTER 21153 FIT UNIT 37300-2B960 2622503 	285-36A FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink Bracket ID: 149mm Bearing ID: 37.5mm Mounting: W/O REFERENCES.. FIT UNIT TG23C033 

285-36C	285-36H	285-36L
FEATURES Diodes:12-50 Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. CARGO 114189 LESTER 11358 11261 FIT UNIT TG17C035 TG17C021 	FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. FIT UNIT TG17C015 	FEATURES Diodes:12-35A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. 
285-36M		
FEATURES Diodes:12-50A Avalanche With M8×32.8mm Battery Post Customer provide negative heat sink REFERENCES.. LESTER 11393 FIT UNIT FG23S010 		

290-070/MOP3006 FEATURES Diodes:6-50 Ampere REFERENCES.. LESTER 8058 8381 8387 8397 MOBILETRON RT-23HD TRANSPO MR6206 	290-071/MOP3006A FEATURES Diodes:6-50 Ampere REFERENCES.. LESTER 8328 8329 8410 8732 MOBILETRON MR6255 290-072/MOP3006B FEATURES For 24V Alternators 	290-300 FEATURES Diodes:6-35 Ampere REFERENCES.. 
290-400 FEATURES Diodes:8-35 Ampere With M5×14.6mm Battery Post REFERENCES.. FIT UNIT JFZ2716D 	290-402 FEATURES Diodes:8-50 Amper With M5×14.6mm Battery Post REFERENCES.. FIT UNIT JFB2716 JFZ2517 	290-470 FEATURES Diodes:6-50A Avalanche For 28V Alternators REFERENCES.. OEM NO AC172RA MOBILETRON AR6255-2147 
291-010/DC1670 FEATURES Diodes:6-50A Avalanche For 28V Alternators REFERENCES.. OEM NO AC172RA MOBILETRON AR6255-2147 	291-020/DC1867 FEATURES Diodes:3-35 Ampere REFERENCES.. CARGO 131876 TRANSPO DR1867 	291-050/MOP6001 FEATURES Diodes:3-35Ampere Positive Rectifier REFERENCES.. MOTOROLA 3109-1018 291-060/MOP6004 FEATURES Diodes:3-35Ampere Positive Rectifier REFERENCES.. MOTOROLA 3109-1012 

291-070/MOP6041 FEATURES Diodes: 3-25Ampere With 2—37.2×3/16"Bolt Negative Rectifier For: Motorola A/8AL HA/8HA RA/8AR Series Alternators w/Isolation REFERENCES.. MOTOROLA 101-106 101-107 101-11 CARGO 131888 LESTER 7091 7099 7353 TRANSPO MR6041 	291-080/MOP6064 FEATURES Diodes: 3-35Ampere With 2—37.2×3/16"Bolt Positive Rectifier For: Motorola 60-70 Amp/12 Volt Alternators For use on: Farm, Industrial, Marine Applications REFERENCES.. MOTOROLA 101-147 101-149 101-17 CARGO 131893 LESTER 7376 TRANSPO MR6064 	291-090/MOP6065 FEATURES Diodes: 3-35Ampere With 2—37.2×3/16"Bolt Negative Rectifier For: Motorola 60-70 Amp/12 Volt Alternators For use on: Farm, Industrial, Marine Applications REFERENCES.. MOTOROLA 101-148 101-47 CARGO 131892 LESTER 7376 TRANSPO MR6065 
291-100/MOP6072 FEATURES Diodes: 3-50Ampere With 50.3×1/4"Bolt Positive Rectifier For: Motorola Alternators For use on: Industrial Equipment REFERENCES.. MOTOROLA 101-162 101-187 CARGO 131891 LESTER 7417 TRANSPO MR6072 	291-110/MOP6300 FEATURES Diodes: 1-25Ampere With 35×1/4" Bolt Negative Rectifier REFERENCES.. MOTOROLA 101-23 101-3 101-58 37438 CARGO 131885 LESTER 7356 7357 7362 7364 TRANSPO MR6300 	291-120/MOP6301 FEATURES Diodes: 2-25Ampere With 35×1/4"Bolt Negative Rectifier REFERENCES.. MOTOROLA 101-13 101-29 101-65 10959 CARGO 131886 LESTER 7356 7357 7362 7364 TRANSPO MR6301 
291-210/ZLB-07 FEATURES Diodes:Positive Assembly 3-50 Ampere Press Fit 330 Volt With Lead Wire 1-125mm With Lead Wire 2-85mm REFERENCES.. MOTOROLA 97084 CARGO 230752 LESTER 7613 TRANSPO LR97084 WAI 31-505 MOBILETRON RC-07HV 	291-240/ZLB-08 FEATURES Diodes:Negative Assembly 3-50 Ampere Press Fit 330 Volt With Lead Wire 1-125mm With Lead Wire 2-85mm REFERENCES.. MOTOROLA 97085 CARGO 230753 LESTER 7613 TRANSPO LR97085 WAI 31-504 MOBILETRON RC-08HV 	291-270/ZLB-09 FEATURES Diodes:Positive ssembly 3-35 Ampere Press Fit 330 Volt With Lead Wire 3-125mm REFERENCES.. MOTOROLA 79193 CARGO 230606 LESTER 7614 7667 7602 TRANSPO LR79193 WAI 31-503 MOBILETRON RC-05HV 

291-300/ZLB-10 FEATURES Diodes:Negative Assembly 3-35 Ampere Press Fit 330 Volt With Lead Wire 3-134mm REFERENCES.. MOTOROLA 79415 CARGO 230607 LESTER 77061A 7711JA TRANSP0 LR-79415 WAI 31-502 MOBILETRON RC-06HV 	292-040 FEATURES Diodes: 35 Ampere Press Fit Negative Assembly Die -Cast Aluminium Heat Sink (1" T) High -Temp Leads Terminals In Cluded FOR USE ON:65-105A 2300- 2600JB Series REFERENCES.. CARGO 137229 TRANSP0 LR71181 LEECE NEVILLE 71181 78753 	291-360/ZLB-12 FEATURES Diodes:Negative Assembly 3-35 Ampere Button Aluminum Heat Sink For use on:Chrysler Square Back REFERENCES.. CARGO 131419 TRANSP0 CR3041 
291-410/ZLB-17 FEATURES Diodes:6-50 Ampere Negative Assembly 10-Gauge Leads with Hi-Temp Insulation REFERENCES.. MOTOROLA 101425 TRANSP0 LR711425 	291-420/ZLB-18 FEATURES Diodes:Positive Assembly 3-35 Ampere Button Aluminum Heat Sink With 1/4" x 40 Battery Post REFERENCES.. 	291-430/ZLB-19N FEATURES Diodes:4-35 Ampere Negative Assembly Aluminum Heat Sink REFERENCES.. 
291-440/ZLB-19P FEATURES Diodes:4-35 Ampere Negative Assembly Aluminum Heat Sink REFERENCES.. 	291-470 FEATURES Diodes:6-50A Avalanche For 24V Alternators REFERENCES.. OEM NO AC172RA MOBILETRON AR6255-2147 	291-520 FEATURES Diodes:8-35 Ampere With M6×39mm Battery Postt With Aluminum Heat Sink REFERENCES.. 

29Z-010	29Z-020	29Z-030
FEATURES Diodes:6-35 Ampere Diameter OD:105mm FOR USE ON: NIKKO REFERENCES.. KOMATSU 1600 R-067 	FEATURES Diodes:8-50 Ampere Diameter OD:111 mm FOR USE ON: NIKKO REFERENCES.. KOMATSU 1800 	FEATURES Diodes:35 Ampere Press Fit Positive Assenbly Die-Cast Aluminium Heat Sink (1" T) High-Temp Leads Terminals In cluded FOR USE ON:65-105A 2300-2600JB Series REFERENCES.. AES 2480 CARGO 137228 TRANSPO LR71180 

DISH DIODES



7430

FEATURES

Diode: POSITIVE, 25Ampere , 300V

Dim(mm): 8.4OD

Lead(mm): 1.5Dia×20L

Original & X-References...

CARGO 131509

TRANSPO 7220

7430A

Diode: POSITIVE, 25A Avalanche,
24-32V

7431

FEATURES

Diode: NEGATIVE, 25Ampere , 300V

Dim(mm): 8.4OD

Lead(mm): 1.5Dia×20L

Original & X-References...

CARGO 131508

TRANSPO 7221

7431A

Diode: NEGATIVE, 25A Avalanche,
24-32V

7432

FEATURES

Diode: POSITIVE, 35Ampere , 300V

Dim(mm): 9.7OD

Lead(mm): 1.5Dia×20L

Original & X-References...

TRANSPO 7230

7433

FEATURES

Diode: NEGATIVE, 35Ampere , 300V

Dim(mm): 9.7OD

Lead(mm): 1.5Dia×20L

Original & X-References...

TRANSPO 7231

CAN DIODES



7650

FEATURES

Diode: POSITIVE, 25Ampere , 300V

Dim(mm): 8.8OD 5/16"

Lead(mm): 1.5Dia×24.6L

Original & X-References...

MOBILETRON MFDD00061

DD-1011

CARGO 131507

TRANSPO 8524

7651

FEATURES

Diode: NEGATIVE, 25Ampere , 300V

Dim(mm): 8.8OD 5/16"

Lead(mm): 1.5Dia×24.6L

Original & X-References...

MOBILETRON DD-1010

CARGO 131507

TRANSPO 8525



7652

FEATURES

Diode: POSITIVE, 25Ampere , 300V

Dim(mm): 8.8OD 5/16"

Lead(mm): Fork

Original & X-References...

TRANSPO 8534

7653

FEATURES

Diode: NEGATIVE, 25Ampere , 300V

Dim(mm): 8.8OD 5/16"

Lead(mm): Fork

Original & X-References...

TRANSPO 8535

BLOCK DIODES	BUTTON DIODES	AXIAL LEAD DIODES
 DB8330 (47211B030P00-4) FEATURES Diode: POSITIVE, 30Ampere , 200V Original & X-References... SAS COMPONENTS 7664 WAI 32-8300 CARGO 133704 TRANSPO 8330 DB8331 (47211B030N00-4) FEATURES Diode: NEGATIVE, 30Ampere , 200V Original & X-References... SAS COMPONENTS 7665 WAI 32-8301 TRANSPO 8331 CARGO 133705 DB8334 (47211B035P01-4) FEATURES Diode: POSITIVE, 35Ampere , 200V Original & X-References... WAI 32-8303 WIEGEL DIOUN800015 TRANSPO 8334 DB8335 (47211B035N01-4) FEATURES Diode: NEGATIVE, 35Ampere , 200V Original & X-References... WAI 32-8304 WIEGEL DIOUN800016 TRANSPO 8335	 DB001 (47211D025003-4) FEATURES Diode: 25Ampere , 200V Dim(mm): 8.5OD×6T Original & X-References... TRANSPO 8125 DB002 (47211D035001-4) FEATURES Diode: 35Ampere ,200V Dim(mm): 10OD×6T Original & X-References... TRANSPO 8135 DB003 (47211D050001-4) FEATURES Diode: 50Ampere , 200V Dim(mm): 10OD×6T Original & X-References... TRANSPO 8150 DB004 (47211D050020-4) FEATURES Diode: 50A Avalanche , 24-32V Dim(mm): 10OD×6T TRANSPO 8153	 IN8010 (4721N4004031-4) FEATURES Diode: 1.0 Ampere ,400V Original & X-References... TRANSPO 8010 IN8015 (472RL204G030-4) FEATURES Diode: 2.0 Ampere , 400V Original & X-References... TRANSPO 8015 IN8025 (4721N8025031-4) FEATURES Diode: 2.5 Ampere , 330V Original & X-References... TRANSPO 8025 IN8030 (472050039031-4) FEATURES Diode: 3.0 Ampere , 400V Original & X-References... TRANSPO 8030

STUD MOUNT DIODES	DELCO TRIOS	DELCO TRIOS
 QZ7540 (P1570750100P-1) FEATURES Diode: POSITIVE, 70Ampere , 400V Stud: 1/4"-28 Original & X-References... CARGO 133495 TRANSPO 1120 QZ7541 (P1570750100N-1) FEATURES Diode: NEGATIVE, 75Ampere , 400V Stud: 1/4"-28 Original & X-References... TRANSPO 1120-R	 DJ1001 FEATURES DIODE TRIO DR 27SI For use on: Delco 27SI, Type 100/200 Alternators Original & X-References... A.I.M AO-0727D ACE-ELECTRIC S2201 AES 92 AMC 801817 830891 AMSCO DA-5 BWD SC116  DJ524 FEATURES DIODE TRIO DR 11SI Orange Case For use on: European & South American Vehicles With Delco 11 SI Alternators Original & X-References... CARGO 130674 132611 CPC ARDE-112 DELCO 1984032 3472312 7982635 DR3901 FILKO 131ZT GAPINT.LTD. GP210 TRANSPO DET524	 DJ527 FEATURES DIODE TRIO DR 10SI Orange Case For use on: Delco 10 , 12 , 15 , 17SI Alternators Original & X-References... A.I.M AO-0710D ACE-ELECTRIC S1390 AES 91 AMSCO DA-109 ATP DR10T CATERPILLAR 9N 1202 CPC ATDE-690 TRANSPO D527  DJ528 FEATURES DIODE TRIO DR 10SI Black Case For use on: Delco 10 , 12 , 15 , 17SI Alternators Original & X-References... A.I.M AO-0710D ACE-ELECTRIC S1390 AES 91 AMSCO DA-109 ATP DR10T CATERPILLAR 9N 1202 CPC ATDE-690 TRANSPO D528

DELCO TRIOS

**DJ797****FEATURES**

DIODE TRIO DR 30SI

For use on: Delco 30SI Alternators

Original & X-References...

A.I.M AO-0730D
 ACE-ELECTRIC S2245
 AMSCO DA-5T
 BWD SC228
 CARGO 131416
 DELCO 10456389 1876797
 ECHLIN AC 63
 TRANSPO D797

DELCO TRIOS

**DT182****FEATURES**

DIODE TRIO DR 33SI

For use on: Industrial, Agricultural, Delco 321-734, 10459114

Original & X-References...

DELCO 10491182
 J&N ELECTRIC 171-12106
 WAI 33-109
 TRANSPO DT182

**DT182-1****FEATURES**

DIODE TRIO DR 33SI


**DJ985****FEATURES**

DIODE TRIO DR 21SI

For use on: Delco 17& 21SI Alternators

Original & X-References...

A.I.M AO-0717D
 ACE-ELECTRIC S1662
 AEC 94
 AMSCO DA-234
 CARGO 131897
 DELCO 1988985 D3927
 TRANSPO D985

**DT22****FEATURES**

DIODE TRIO DR 22SI

With Quick-Start Circuit

For use on: Delco 22SI Alternators

Original & X-References...

DELCO 10487805
 J&N ELECTRIC 171-12103
 LECLERCO 009-0528
 WAGNER D04-08
 WAI 33-108
 TRANSPO DT22

DELCO TRIOS

**LJ79026****FEATURES**

Diode: 1A, 200V

For use on: Leece Neville 4400-4700J, 7000-7700J Alternators

Original & X-References...

A.I.M AX-0705D
 ACE-ELECTRIC S1427
 AMSCO LN-193
 JUST PARTS LN11487
 WAI 33-502
 TRANSPO L79026

**LJ79027****FEATURES**

Diode: 1A, 200V

For use on: Leece Neville 2300-2800JB Alternators

Original & X-References...

AES 1054
 AMSCO LN-191
 WAI 33-500
 TRANSPO L79027

DELCO TRIOS	DELCO TRIOS	DELCO TRIOS
 S5231 FEATURES Diode: 3A , 800V  SJ5231 FEATURES Diode: 3A, 800V  SJ5260 FEATURES DIODE TRIO DR 21SI Original & X-References... CARGO 233201	 RN354P FEATURES Diode: POSITIVE, 35Ampere, 300V Dim(mm): 11.75 OD Lead(mm): 1.5Dia×20L Original & X-References... WAI 32-8105 WIEGEL DIOUN800024 TRANSPO 8630 RN35MP FEATURES Diode: POSITIVE, 35Ampere, 19~32V Dim(mm): 11.75 OD Lead(mm): 1.5Dia×20L Original & X-References... WAI 32-8105 WIEGEL DIOUN800024 TRANSPO 8630 RN504P FEATURES Diode: POSITIVE, 50Ampere, 300V Dim(mm): 11.75 OD Lead(mm): 1.5Dia×20L RN504M FEATURES Diode: POSITIVE, 50 A Avalanche, 19-32V Dim(mm): 11.75OD Lead(mm): 1.5Dia×20L Original & X-References... WAI 32-8109 WIEGEL DIOUN800028 TRANSPO 8660	 RN354N FEATURES Diode: NEGATIVE, 35Ampere, 300V Dim(mm): 11.75 OD Lead(mm): 1.5Dia×20L Original & X-References... WAI 32-8104 WIEGEL DIOUN800025 TRANSPO 8631 RN35MN FEATURES Diode: POSITIVE, 35Ampere, 19~32V Dim(mm): 11.75 OD Lead(mm): 1.5Dia×20L Original & X-References... WAI 32-8104 WIEGEL DIOUN800025 TRANSPO 8631 RN504N FEATURES Diode: NEGATIVE, 50Ampere, 300V Dim(mm): 11.75 OD Lead(mm): 1.5Dia×20L RN50MN FEATURES Diode: NEGATIVE, 50 A Avalanche, 19-32V Dim(mm): 11.75OD Lead(mm): 1.5Dia×20L Original & X-References... WAI 32-8108 WIEGEL DIOUN800029 TRANSPO 8661

DELCO TRIOS

**QZ3520****FEATURES**

Diode: POSITIVE, 35Ampere, 300V

Dim(mm): 12.75 OD

Lead(mm): 1.4Dia×29L

QZ3521**FEATURES**

Diode: NEGATIVE, 35Ampere, 300V

Dim(mm): 12.75 OD

Lead(mm): 1.4Dia×29L

**QZ5020****FEATURES**

Diode: POSITIVE, 50Ampere, 300V

Dim(mm): 12.75 OD

Lead(mm): 2.5Dia×16.2L

QZ5021**FEATURES**

Diode: NEGATIVE, 50Ampere, 300V

Dim(mm): 12.75 OD

Lead(mm): 2.5Dia×16.2L

DELCO TRIOS

**S-15B****FEATURES**

Diode: POSITIVE, 25Ampere, 300V

Dim(mm): 11 OD

Lead(mm): Fork, 2mm×18.5L

S-16B**FEATURES**

Diode: NEGATIVE, 25Ampere, 300V

Dim(mm): 11 OD

Lead(mm): Fork, 2mm×18.5L

**7700****FEATURES**

Diode: POSITIVE, 25Ampere, 300V

Dim(mm): 12.7(1/2")OD

Lead(mm): 1.5Dia×25L

Original & X-References...

MOBILETRON DD-1013

NAPA AC1P

RENARD 7700

TRANSPO 8724

7701**FEATURES**

Diode: NEGATIVE, 25Ampere, 300V

Dim(mm): 12.7(1/2")OD

Lead(mm): 1.5Dia×25L

Original & X-References...

MOBILETRON DD-1012

NAPA AC1N

TRANSPO 8725

DELCO TRIOS

**7780-B****FEATURES**

Diode: POSITIVE, 35Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 1.5Dia×25L

Original & X-References...

MOBILETRON DD-1015

TRANSPO 8734

7781-B**FEATURES**

Diode: NEGATIVE, 35Ampere, 300V

Dim(mm): 12.7(1/2") OD

Lead(mm): 1.5Dia×25L

Original & X-References...

MOBILETRON DD-1014

TRANSPO 8735

**7770****FEATURES**

Diode: POSITIVE, 50Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 2.5Dia×20.8L

Original & X-References...

WAGNER W04X-05

WAI 32-755

TRANSPO 8752

7771**FEATURES**

Diode: NEGATIVE, 50Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 2.5Dia×20.8L

Original & X-References...

WAI 32-754

TRANSPO 8753

DELCO TRIOS



7800

FEATURES

Diode: POSITIVE, 25Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 1.4 Dia×29.3L

7801

FEATURES

Diode: NEGATIVE, 25Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 1.4 Dia×29.3L



7880

FEATURES

Diode: POSITIVE, 35Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 1.4 Dia×29.3L

Original & X-References...

CHRYSLER 3000 047 CH4005

DUBOIS 5003

TRANSPO 8824

7881

FEATURES

Diode: NEGATIVE, 35Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 1.4 Dia×29.3L

Original & X-References...

CHRYSLER 3000 046 CH4004

DUBOIS 5004

TRANSPO 8825

DELCO TRIOS



8624

FEATURES

Diode: POSITIVE, 35Ampere, 300V

Dim(mm): 13 OD

Lead(mm): 2Dia×18.5L

Original & X-References...

CARGO 134495

HITACHI Q06B

WAI 32-8101

TRANSPO 8624

8625

FEATURES

Diode: NEGATIVE, 35Ampere, 300V

Dim(mm): 13 OD

Lead(mm): 2Dia×18.5L

Original & X-References...

CARGO 134494

HITACHI Q05B

WAI 32-8100

TRANSPO 8625



7770-1

FEATURES

Diode: POSITIVE, 50Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 35L

7771-1

FEATURES

Diode: NEGATIVE, 50Ampere, 300V

Dim(mm): 12.7(1/2") OD

Lead(mm): 35L

DELCO TRIOS



7812

FEATURES

Diode: POSITIVE, 35Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 35L

7813

FEATURES

Diode: NEGATIVE, 35Ampere, 300V

Dim(mm): 12.7(1/2") OD

Lead(mm): 35L



7814

FEATURES

Diode: POSITIVE, 35Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 17L

7815

FEATURES

Diode: NEGATIVE, 35Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 17L

DELCO TRIOS

**7900****FEATURES**

Diode: POSITIVE, 25Ampere, 300V

Dim(mm): 12.75 (1/2")OD

Lead(mm): 30

Original & X-References...

DELCO 1852929 1959829

WAI 32-108

TRANSPO 8960

7901**FEATURES**

Diode: NEGATIVE, 25Ampere, 300V

Dim(mm): 12.75 (1/2")OD

Lead(mm): 30

Original & X-References...

DELCO 1852928 1959830

WAI 32-107

TRANSPO 8961

**7902****FEATURES**

Diode: POSITIVE, 35Ampere, 300V

Dim(mm): 12.75(1/2")OD

Lead(mm): 30L

7903**FEATURES**

Diode: NEGATIVE, 35Ampere, 300V

Dim(mm): 12.75(1/2")OD

Lead(mm): 30

DELCO TRIOS

**7960****FEATURES**

Diode: POSITIVE, 35Ampere, 300V

Dim(mm): 12.7 (1/2")OD

Lead(mm): 40L

7961**FEATURES**

Diode: NEGATIVE, 35Ampere, 300V

Dim(mm): 12.7(1/2") OD

Lead(mm): 40L

**7980****FEATURES**

Diode: POSITIVE, 35Ampere, 300V

Dim(mm): 12.75 (1/2")OD

Lead(mm): 30L

Popular for Delco 25SI

Original & X-References...

CARGO 130672

DELCO 1971672

WAI 32-103

TRANSPO 8980

7981**FEATURES**

Diode: NEGATIVE, 35Ampere, 300V

Dim(mm): 12.75 (1/2")OD

Lead(mm): 30L

Popular for Delco 25SI

Original & X-References...

CARGO 133194

DELCO 1971671

WAI 32-102

TRANSPO 8981

PRESS-FIT OJ DIODE	PRESS-FIT OJ DIODE	PRESS-FIT OJ DIODE
 BN354P FEATURES Diode: POSITIVE, 35Ampere, 300V Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN354N FEATURES Diode: NEGATIVE, 35Ampere, 300V Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN35LP FEATURES Diode: POSITIVE, 35Ampere, 19-24V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN35LN FEATURES Diode: NEGATIVE, 35Ampere, 19-24V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN35MP FEATURES Diode: POSITIVE, 35Ampere, 24-32V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN35MN FEATURES Diode: NEGATIVE, 35Ampere, 24-32V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L	BN35HP FEATURES Diode: POSITIVE, 35Ampere, 34-42V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN35HN FEATURES Diode: NEGATIVE, 35Ampere, 34-42V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN504P FEATURES Diode: POSITIVE, 50Ampere, 300V Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN504N FEATURES Diode: NEGATIVE, 50Ampere, 300V Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN50LP FEATURES Diode: POSITIVE, 50Ampere, 19-24V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN50LN FEATURES Diode: NEGATIVE, 50Ampere, 19-24V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN50MP FEATURES Diode: POSITIVE, 50Ampere, 24-32V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN50MN FEATURES Diode: NEGATIVE, 50Ampere, 24-32V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L	BN50HP FEATURES Diode: POSITIVE, 50Ampere, 34-42V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN50HN FEATURES Diode: NEGATIVE, 50Ampere, 34-42V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN604P FEATURES Diode: POSITIVE, 60Ampere, 300V Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN604N FEATURES Diode: NEGATIVE, 60Ampere, 300V Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN60LP FEATURES Diode: POSITIVE, 60Ampere, 19-24V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN60LN FEATURES Diode: NEGATIVE, 60Ampere, 19-24V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN60MP FEATURES Diode: POSITIVE, 60Ampere, 24-32V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L BN60MN FEATURES Diode: NEGATIVE, 50Ampere, 24-32V Avalanche Dim(mm): 12.80(1/2")OD Lead(mm): 1.3Dia×23L

BN60HP**FEATURES**

Diode: POSITIVE, 60Ampere,
34-42V Avalanche
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.3Dia×23L

BN60HN**FEATURES**

Diode: NEGATIVE, 60Ampere,
34-42V Avalanche
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.3Dia×23L

BN804P**FEATURES**

Diode: POSITIVE, 80Ampere, 300V
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.5Dia×23L

BN804N**FEATURES**

Diode: NEGATIVE, 80Ampere, 300V
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.5Dia×23L

BN80LP**FEATURES**

Diode: POSITIVE, 80Ampere,
19-24V Avalanche
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.5Dia×23L

BN80LN**FEATURES**

Diode: NEGATIVE, 80Ampere,
19-24V Avalanche
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.5Dia×23L

BN80MP**FEATURES**

Diode: POSITIVE, 80Ampere,
24-32V Avalanche
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.5Dia×23L

BN80MN**FEATURES**


Diode: NEGATIVE, 80Ampere,
24-32V Avalanche
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.5Dia×23L

BN80HP**FEATURES**

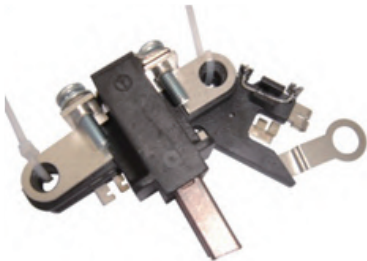
Diode: POSITIVE, 80Ampere,
34-42V Avalanche
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.5Dia×23L

BN80HN**FEATURES**


Diode: NEGATIVE, 80Ampere,
34-42V Avalanche
Dim(mm): 12.80(1/2")OD
Lead(mm): 1.5Dia×23L


14A00100/A1494 	14A00200/A718-1 	14A00300/A1341  Capacitor:2.2uF.250V Φ 121mm CARGO 139928 F00M 146626
14B0A600 FEATURES 2.2UF 100V REFERENCES.. CARGO 115925 LESTER 11231 MOBILETRON TB-M146 FIT UNITS A2TJ0481 WAI/TRANSPO 39-8304 	14B0B700 FEATURES 2.2μF 200V REFERENCES.. LESTER 20703 FIT UNITS FG18D037/276622  2.2uF 200V	14B09K00  A04CSC29D
14B09N00 FEATURES REFERENCES.. MOBILETRON BH-M03 FIT UNITS A5TZ0091 	14B00100/YD-T004  For use on : TOYOTA CARGO 230116 021630-0650	14B00200/YD-T008 
14B00300/YD-T010  CARGO 132426 For : HIR252 L150-43303	14B00400/YD-T011 	14B00500/YD-T014  Capacitor : 0.47uF . 250V CARGO 135226 021630-0602

14B00600/YD-T015  Capacitor : 0.47uF . 250V	14B00700/YD-T022  CARGO 135640 1403-0003	14B00800/YD-T025  For : HIR766 L180G-4330
14B00900/YD-T027  For : HIR767 L170G-3330	14B01000/YD-T029  Replacing 903 902 0 Servicing A124N A12M 12V Complete w/brushes CARGO 130703 130702 133547 74999461	14B01100/YD-T030  For : HIR776
14B01200/B-001  Capacitor : 2.2uF . 250V	14B01300/B-004  Capacitor : 2.2uF . 250V	14B01400/B-005  For : HI11130
14B01500/B-006 	14B01600/B-007 	14B01700/B-008  39-8203 133673

14B01800/B-009  CARGO 135419 WAI 39-820	14B01900/B-010  Brush Holder Assy. For: Nippondenso IR/IF Alternators MOBILTERON BH-ND01 WAI 39-8200 CARGO 132084	14B02000/B-012 
14B02100/B-013 	14B02200/B-014 	14B02300/B-015 
14B02400/B-017 	14B02500/B-018 	14B02600/B-019 
14B02800/B-020 	14B02900/B-021 	14B03100/B-029 

14B03300/B-032	14B03700/B-040	14B03800/B-044
		
14B04000/B-046	14B04100/B-047	14B04200/B-048
		
14B04300/B-049	14B04400/B-051	14B04600/B-055
	 2.2uF 200V	 2.2uF 200V
14B04800/B-057	14B05100/B-060	14B05400/B-063
	 LESTER 11115	

14B06600/B-011 	14B06700/B-003  10475746 For :Delco CS130D Series IR/IF Alternators WAI 39-109 Components:38-119/120/39-1209 Brush Holder	14B06900/B-002  Brush Holder Assy For : FR3G
14B08900 	14B09100 	14B09200 
14B09300 	14B09400 	14B09700 
14C0A000  2611100	14C0AH00  Φ 120.6mm	14C0AJ00  Φ 129mm

14C0AK00  Φ 61.8mm	YD-T032  For: NPR920	14C00300/C-003  Φ 134.2mm
14C00400/C-004  Capacitor:2.2uF.250V Φ 121.3mm	14C00500/C-005 	14C01100/C-006  Capacitor:2.2uF.250V Φ 121mm
14C01200/C-007  Φ 120mm	14C01600/C-011  2547772	14C01700/C-012  1615-0007
14C01900/C-014 	14C02000/C-015 	14C02100/C-016 

14C02200/C-017  2548336 Φ 130mm	14C02400/C-019 	14C02500/C-020 
14C02600/C-021 	14C02900/C-024  Capacitor : 2.2Uf/250V 0124515016 Φ 117.6mm M8×54	14C03000/C-025  Capacitor : 2.2Uf/250V A628592A F00M 146761 Φ 120.86mm M8×25.4
14C03100/C-026  Φ 120mm M8×16	14C03300/C-029  2607196 Φ 128mm	14C03400/C-030  Φ 121mm M6
14C03500/C-031 	14C03700/C-033  Φ 121mm	14C03800/C-034 

14C04000/C-036  Φ 139mm	14C04100/C-037  Φ 126mm	14C04200/C-038  Φ 121.3mm M8-6h
14C04300/C-039  Φ 109.4mm	14C04400/C-040  Φ 121mm M8-6h	14C04500/C-041  Φ 129mm
14C04600/C-043  Φ 121mm M8×25.4	14C04700/C-044  Φ 121mm M6×13	14C04800/C-045  Φ 150.8mm
14C05000/C-048  F00M196001 CA1776IR Φ 121mm	14C05100/C-049  	14C05200/C-050  Φ 121mm M6×13

14C05300/C-051  Φ 120mm	14C05400/C-052  Φ 109mm	14C05600/2564  Φ 128mm M5×24.3
14C05700/2923  Φ 128mm M5×24.3	14C05800/C-056  Φ 110mm	14C05900/C-057  23100-3TS3A Φ 109mm
14C06700/RJ12015  Capacitor:2.2uF.250V Φ 121mm M8×54 CARGO 232833 F00M 146 622/0 124 415 005/ 146 718	14C06800/RJ12016  Capacitor:2.2uF.250V Φ 121mm CARGO 139926 F00M 146 609/0 124 225 001,002,004,009,022,023,024,025	14C06900/RJ12017  Capacitor:2.2uF.400V CARGO 139656 F00M 126603 Φ 121mm
14C07000/RJ12019B  Capacitor:2.2uF.250V F00M 146659 Φ 121mm	14C07100/RJ12022  Capacitor:2.2uF.400V CARGO 232192 F00M 146644 Φ 121mm M8×25.4	14C07200/RJ408  Capacitor:2.2uF.250V Φ 121mm M8

14C07300/RJ410  Capacitor:2.2uF.250V Φ 121mm CARGO 139928 F00M 146626	14C07400/RJ546  Φ 120.5mm	14C07900  Φ 121mm M6
14C08000  Φ 126mm	14C08100  Φ 123.6mm	14C08500/C-032  2548339 Φ 126mm
14C10100 	14R00100/RJ001  Capacitor:2.2uF.250V	14R00200/RJ002  Capacitor : 2.2Uf/250V
14R00400/RJ019 	14R00500/RJ021 	14R01000/RJ013  0.22uF.400V

14R01200/RJ016  0.5uF.200V 46-5101(L96545)	14R01400/RJ020  Capacitor :2.2uf	14R01500/RJ004  HIR111ZT
14R01600/RJ005  1.5uF.160V CS144	14R01700/RJ006  1.5uF.220V	14R01800/RJ007  2.2uF.100V
14R01900/RJ008  2.2uF.100V	14R02000/RJ009  2.2uF.160V	14R02100/RJ010  1.5uF.250V 4.5mm Eyelet, 50mm Lead Length 46-1101 -10SI
14R02200/RJ011  1.5uF.250V 4.5mm Eyelet, 50mm Lead Length 46-1101 -10SI	14R02300/RJ025  Capacitor:2.2uF.250V CARGO 139580 L180G-2318	14R02400/RJ026  Capacitor:2.2uF.250V CARGO 138731 L180G-1318

14R02600 	14R02800  2.2UF 100V	RJ003  2.2uF.250V CA766 HIR776
RJ014  0.5uF.250V HI11810ZT	RJ015  0.47uF.250V YD-T014/5	14T00100/YD-T001  Capacitor:2.7uF.250V For use on :NIPPONDENSO CARGO 234501 026220-0150
14T00200/YD-T002  Capacitor:0.47uF.250V For use on :NIPPONDENSO CARGO 231453 126220-0050	14T00300/YD-T003  Capacitor:1uF.100V For use on :NIPPONDENSO WAI 46-82201 CARGO 231893 126220-0110	14T00400/YD-T006  Capacitor:1.5uF.100V For use on :NIPPONDENSO CARGO 234727 TRANSP0 INP421 1405-0008
14T00500/YD-T007  CARGO 232212	14T00600/YD-T012  Capacitor:1.5uF.100V For use on :NIPPONDENSO CARGO 235691	14T00700/YD-T013  Capacitor:1.5uF.100V CARGO 235673 TRANSP0 INP420

14T00800/YD-T016  Servicing 633 21711 63341711 Terminal CARGO 233825 1220-0043	14T00900/YD-T018  Servicing 633 21679 B+ Terminal CARGO 232465 MM8047	14T01000/YD-T017  CARGO 232464 1920-0044
14T01100/YD-T019  CARGO 233823 1917-0003	14T01200/YD-T023  A13V1241 KOPIE 1320-0138	14T01300/YD-T026  CARGO 234069 1920-0057
14T01400/YD-T028  Replacing 593288 CARGO 139451	14T01500/YD-T033  14T01700/RJ800	14T01600/T-005  Servicing A127 54022487 Resistor CARGO 231353 1220-0044
14T01700/RJ800  Capacitor:2.2uF.250V CARGO 135514 95-0275	14T01800/RJ802  Capacitor:2.2uF.250V CARGO 135433	14T01900/RJ808  Capacitor:2.2uF.250V CARGO 136644

14T02000/RJ814  Capacitor:2.2uF.250V CARGO 135495 592934	14T02100/RJ844  Capacitor:2.2uF.250V CARGO 137522 593233	14T02200/YD-T021 
14T02500/T-001  Resistor 460 Ohm/2W For:HI11810ZT	14T02600/T-002  Capacitor:2.2uF.250V	14T02700/T-003  CARGO: 235458 VALEO: 2542524 2542771 2548655
14T02900/T-006 	14T03000/T-007  Φ 120mm	14T03100/T-008  2547772
14T03400/T-010  1615-0007	14T03500/T-011  With M8	14T03600/T-012  361°

14T03800/T-015 	14T03900/T-016 	14T04000/T-017 
14T04100/T-018 	14T04200/T-019  46-82207 TB-ND163	14T04300/T-020  NIPPONDENSO :126220-0230 MOBILETRON :TB-ND167 WAI :46-82205
14T04400/T-021  MOBILETRON :TB-ND165 WAI :46-82208	14T04500/T-022 	14T04600/T-023  AVG241607
14T07100 FEATURES 2.2μF/200V 	14K00600  M10*49mm	

QUALITY CONTROL SYSTEM



- TS 16949
- ISO 14001
- OHSAS 18001
- Manufacturing Execution System(MES)
- Enterprise Resource Planning(ERP)
- Product Data Management(PDM)



江苏云意电气股份有限公司
JIANGSU YUNYI ELECTRIC CO.,LTD

地址 (ADD) : 江苏省徐州市铜山区黄山路26号
#26, HUANGSHAN RD, TONGSHAN AREA, XUZHOU,
JIANGSU, CHINA, 221116

电话 (TEL) : 4000-300-304
0086-516-83505462
0086-516-83538150

传真 (FAX) : 0086-516-83507801

E-mail: yunyixz@yunyi-china.cn
Web: www.yunyi-china.com

YY-V9.1-20230128

提示:所有涉及到的厂家的名称、型号及图片, 仅做参考, 规格请以实物为准!
Tip: All the manufacturers names, product numbers and pictures referred are used for reference only.